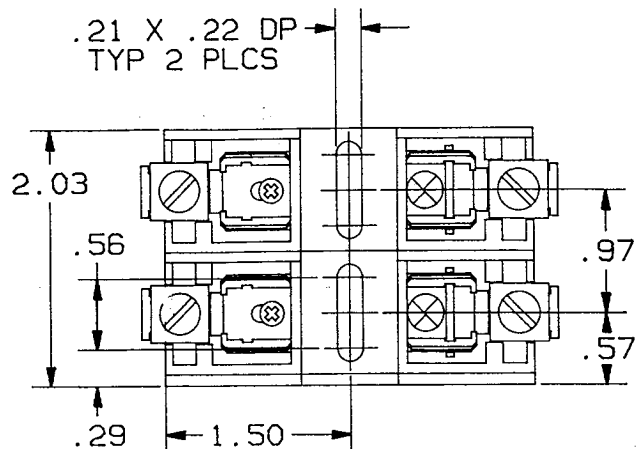


REV	DESCRIPTION	DATE	APPD
00	RELEASED	9/10/91	1/87

P/N	FUSE CLASS	RMS SYM RATING	TORQUE (IN-LBS)	WIRE		U/L		CSA REPORT NO.
				°C	TYPE	FILE NO.	GUIDE NO.	
20302 [2]	H,K	10K	35	60/75	CU-AL	E52283	IZLT	LR32169
20307 20357 [3]	H,K	10K	35	60/75	CU-AL CU ONLY			
20307R 20357R	R	200K	35	60/75	CU-AL CU ONLY			

REFERENCE
MAR 16 1992

P/N 20302
P/N 20307(R) SPRF
P/N 20357(R) SPRF
ADD 'R' FOR CLASS R

- [3] OMIT REJECTION.
[2] OMIT SPRING AND REJECTION.

1. MATL COMPOSITION AND RATING:
POLYCARBONATE-125°C RTI.

NOTES: UNLESS OTHERWISE SPECIFIED

NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - STAMP OR ETCH DWG. NO. ON PART - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: XXXX±.0005; XXX±.005; XX±.01; X±.04; ANGLES ±0°30'				MATERIAL		GOULD SHAWMUT GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654	
FINISH		PRODUCT INFO		A			
THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IS CONFIDENTIAL. MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.				SIGNATURES		DATE	
ASSY DWG USED ON		REF OR SIM DWG		CHKD G. OAKLEY 6/10/91		ENGD	
APPD				1/10/91		1/10/91	
TITLE FUSE BLOCK, 250V-30A 2 POLE BOX CONNECTOR				DWG NO		REV	
SCALE 1/1		FILE NO		SHEET 1 OF 1			