
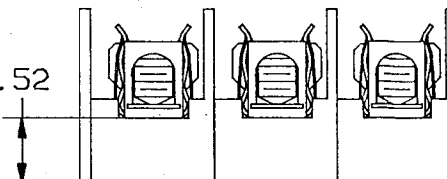
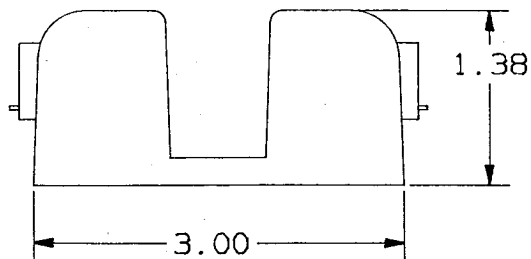


.21 X .22 DP
TYP 3 PLCS

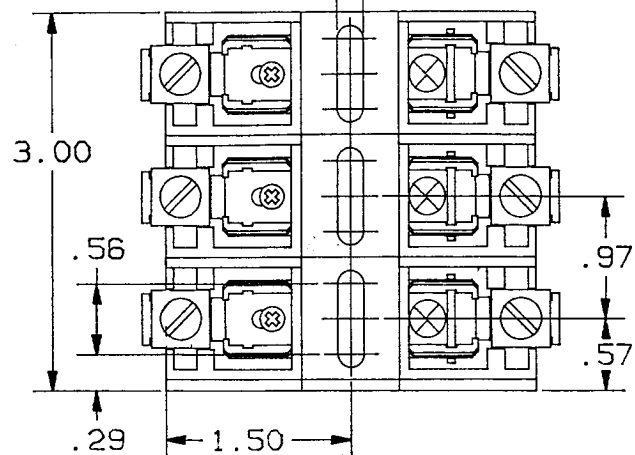

REV	DESCRIPTION	DATE	APPD
00	RELEASED	6/10/91	6/10/91

P/N	FUSE CLASS	RMS SYM RATING	TORQUE (IN-LBS)	WIRE		U/L		CSA
				°C	TYPE	FILE NO.	GUIDE NO.	REPORT NO.
20303 [2]	H, K	10K	35	60/75	CU-AL	E52283	IZLT	LR32169
20308 20358	[3] H, K	10K	35	60/75	CU-AL CU ONLY			
20308R 20358R	R	200K	35	60/75	CU-AL CU ONLY			

REFERENCE

MAR 16 1992

P/N 20303
P/N 20308(R) SPRF
P/N 20358(R) SPRF
ADD 'R' FOR CLASS R

- [3] OMIT REJECTION.
[2] OMIT SPRING AND REJECTION.
1. MATL COMPOSITION AND RATING:
POLYCARBONATE-125°C RTI.

NOTES: UNLESS OTHERWISE SPECIFIED

NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - STAMP OR ETCH DWG. NO. ON PART - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: XXXX±.0005; XXX±.005; XX±.01; X±.04; ANGLES ±0°30'				MATERIAL		GOULD SHAWMUT GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654	
				FINISH			
THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IS CONFIDENTIAL. MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.				SIGNATURES		DATE	
				ORWN		DATE	
ASSY DWG USED ON				CHKD G. Oakley 6/10/91		DWG NO 05B0329	
REF OR SIM DWG				ENGD		REV 00	
APPD 6/10/91 6/10/91				SCALE 1/1		SHEET 1 OF 1	