

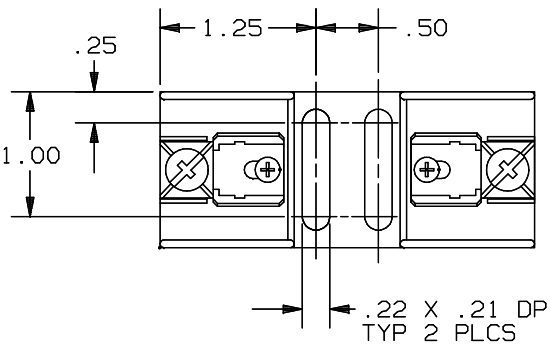


REV-LINES
REV-LINES
REV-LINES



P/N		CONN TYPE	FUSE CLASS	RMS SYM RATING	TORQUE (IN-LBS)	WIRE		U/L		CSA
						°C	TYPE	FILE NO.	GUIDE NO.	REPORT NO.
20311	4	SCREW	H, K	10K	20	60/75	CU-AL	E52283	IZLT	LR32169
20316	5	SCREW	H, K	10K	20	60/75	CU-AL			
20316R			R	200K	20	60/75	CU-AL			
20321	6	PP	H, K	10K	20	60/75	CU-AL			
20326		PP	HK	10K	20	60/75	CU-AL			
20326R			R	200K	20	60/75	CU-AL			

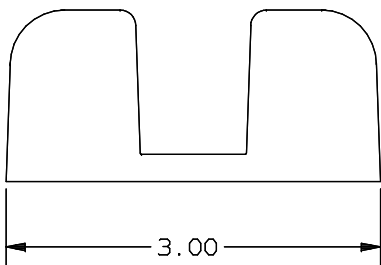

- 6 OMIT SPRF
- 5 OMIT PP
- 4 OMIT PP AND SPRF
- 3. 250V-30A CLASS H,K,OR R 1 POLE
- 2. SHOWN WITH PRESSURE PLATE (PP) CONNECTOR AND SPRING REINFORCEMENT (SPRF), AND WITHOUT REJECTION MEMBER.
- 1. MATERIAL COMPOSITION AND RATING:
BASE-THERMOPLASTIC 125°C RTI
CONNECTOR- COPPER W/TIN PLATE
SPRING- STEEL

P/N 20311
20321
20316
20316R
20326
20326R

NOTES: UNLESS SPECIFIED OTHERWISE

KDS 8/92 92-098