
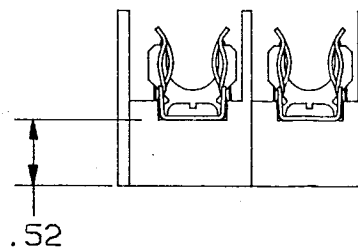
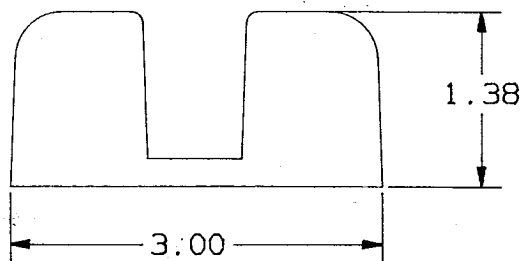


.21 X .22 DP
TYP 2 PLCS

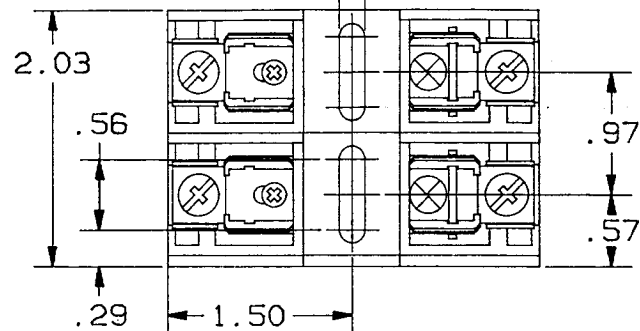

REV	DESCRIPTION	DATE	APPD
00	RELEASED	6/11/91	PBY

P/N	FUSE CLASS	RMS SYM RATING	TORQUE (IN-LBS)	WIRE		U/L		CSA REPORT NO.
				°C	TYPE	FILE NO.	GUIDE NO.	
20312 [2]	H,K	10K	20	60/75	CU ONLY	E52283	IZLT	LR32169
20317 [3]	H,K	10K	20	60/75	CU ONLY			
20317R	R	200K	20	60/75	CU ONLY			

REFERENCE

MAR 16 1992

P/N 20312

P/N 20317 SPRF

P/N 20317R SPRF

[3] OMIT REJECTION.

[2] OMIT SPRING AND REJECTION.

1. MATL COMPOSITION AND RATING:
POLYCARBONATE-125°C RTI.

NOTES: UNLESS OTHERWISE SPECIFIED

NOTES UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN INCHES - STAMP OR ETCH DWG. NO. ON PART - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: XXXX±.0005; XXX±.005; XX±.01; X±.04; ANGLES ±0°30'				MATERIAL		GOULD SHAWMUT GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654	
				FINISH			
THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD, IS CONFIDENTIAL, MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.				SIGNATURES		DATE	
				DRWN			
ASSY DWG USED ON		REF OR SIM DWG		CHKD G. OAKLEY		6/11/91	
				ENGD			
				APPD [Signature]		6/11/91	
DWG NO 05B0330						REV 00	
SCALE 1/1						FILE NO 1 OF 1	