
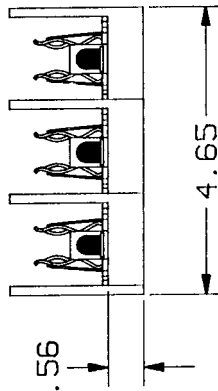
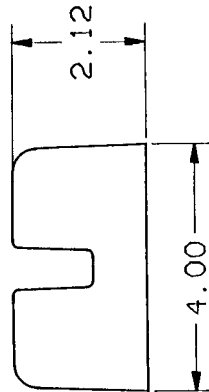


| REV | DESCRIPTION | DATE    | APPD |
|-----|-------------|---------|------|
| 00  | RELEASED    | 6/10/99 | Pat  |

UNCONTROLLED  
COPY  
JUN 01 1999

.26 DIA X  
.21 DP TYP

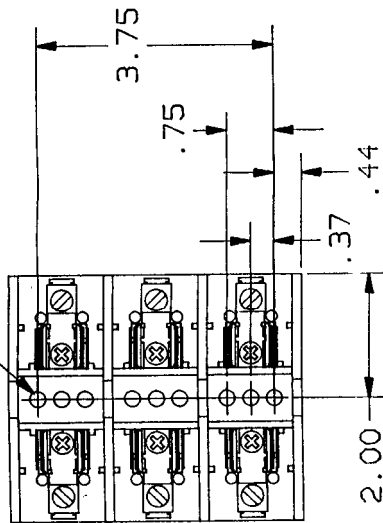

P/N 60303J  
P/N 60308J SPRF  
P/N 60358J SPRF

| P/N      | FUSE CLASS | RMS SYM RATING | TORQUE (IN-LBS) | WIRE  |         | U/L      |           | CSA     |
|----------|------------|----------------|-----------------|-------|---------|----------|-----------|---------|
|          |            |                |                 | •C    | TYPE    | FILE NO. | GUIDE NO. |         |
| 60303J 2 | J          | 200K           | 35              | 60/75 | CU-AL   |          |           |         |
| 60308J   | J          | 200K           | 35              | 60/75 | CU-AL   | E52283   | IZLT      | LR32169 |
| 60358J   | J          | 200K           | 35              | 60/75 | CU ONLY |          |           |         |

|                                                                                                                                                                                                                           |                |                                                                                 |                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------|-----------------|
| <b>NOTES UNLESS OTHERWISE SPECIFIED</b><br>ALL DIMENSIONS ARE IN INCHES<br>- STAMP OR ETCH DIMS AND TOL PART<br>- REMOVE ALL BURRS AND SHARP EDGES<br>- TOLERANCES: XXXX+.0005- XXXX-.005<br>XX±.01; X±.04; ANGLES ±0°30' |                | <b>GOULD SHAWMUT</b><br>GOULD SHAWMUT<br>P.O. BOX 729<br>MARBLE FALLS, TX 78654 |                 |
| THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IT IS CONFIDENTIAL, MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.                                            |                | PRODUCT INFO<br>TITLE<br>FUSE BLOCK, 600V-30A 3 POLE BOX CONN                   |                 |
| ASSY DMS USED ON                                                                                                                                                                                                          | REF OR SIM DMS | DWMN<br>CHKO 6/10/99                                                            | DATE<br>6/10/99 |
| SCALE<br>NONE                                                                                                                                                                                                             |                | DWMN NO<br>05B0335                                                              | REV<br>00       |
| APPD 6/10/99                                                                                                                                                                                                              |                | FILE NO                                                                         | SHEET<br>1 of 1 |

- 2 OMIT SPRING.
1. MATL COMPOSITION AND RATING:  
POLYCARBONATE-125°C RT1.
- NOTES: UNLESS OTHERWISE SPECIFIED