
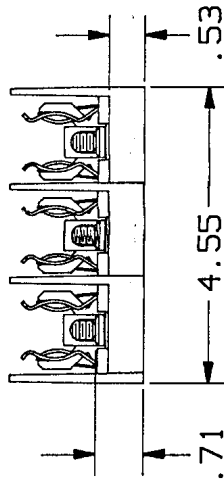
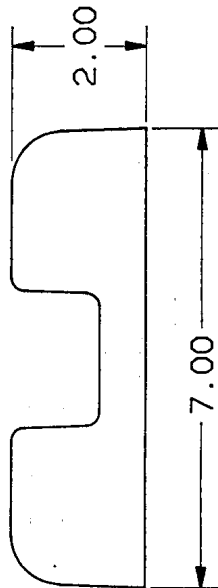


REV	DESCRIPTION	DATE	APPD
00	RELEASED PER ECO#91-037	10/23/91	POV

.27 X .09 THRU TYP .16 R TYP .21 Ø X .09 DP TYP

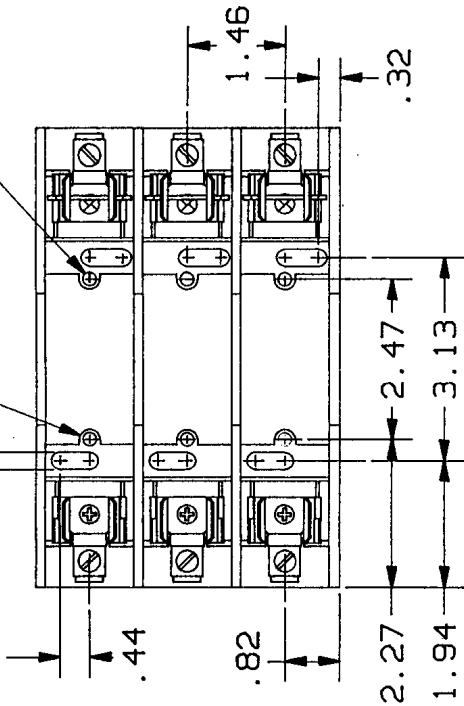

P/N	FUSE CLASS	RMS SYM RATING	TORQUE (IN-LBS)	WIRE		UL		CSA
				°C	TYPE	FILE NO.	GUIDE NO.	
60603	2	10K	45	60/75	CU-AL			
60608	3	10K	45	60/75	CU-AL CU ONLY	E52283	1ZLT	LR32169
60608R		200K	45	60/75	CU-AL CU ONLY			

REFERENCE

MAR 16 1992

P/N 60603

P/N 60608(R) (SPRF)

P/N 60658R(R) (SPRF)

ADD 'R' FOR CLASS R

MATERIAL		NOTES UNLESS OTHERWISE SPECIFIED	
FINISH		- ALL DIMENSIONS ARE IN INCHES - STAMP OR ETCH DRG. NO. ON PART - REMOVE ALL BURRS AND SHARP EDGES - TOLERANCES: XXX±.0005; XXX±.005; XX±.01; X±.04; X/X±1/32; ANGLES ±0° 30'	
SIGNATURES	DATE	THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF GOULD. IT IS CONFIDENTIAL. MUST NOT BE COPIED OR MADE PUBLIC UNLESS AUTHORIZED AND IS SUBJECT TO RETURN ON DEMAND.	
DRN	MANGONE	ASSY DRG USED ON	REF OR 6TH DRG
CHKD	6.04/44.4		
ENGR			
APPD	POV		

GOULD SHAWMUT		TITLE	
GOULD SHAWMUT P.O. BOX 729 MARBLE FALLS, TX 78654		FUSE BLOCK, 600V- 60A 3 POLE BOX CONNECTOR	
PRODUCT INFO		DRG NO	REV
		05B0332	00
SCALE	NONE	FILE NO	SHEET
			1 of 1

3 OMIT REJECTION.

2 OMIT SPRING AND REJECTION.

1. MATL COMPOSITION AND RATING:
THERMOPLASTIC-125°C RTI.

NOTES: UNLESS OTHERWISE SPECIFIED