


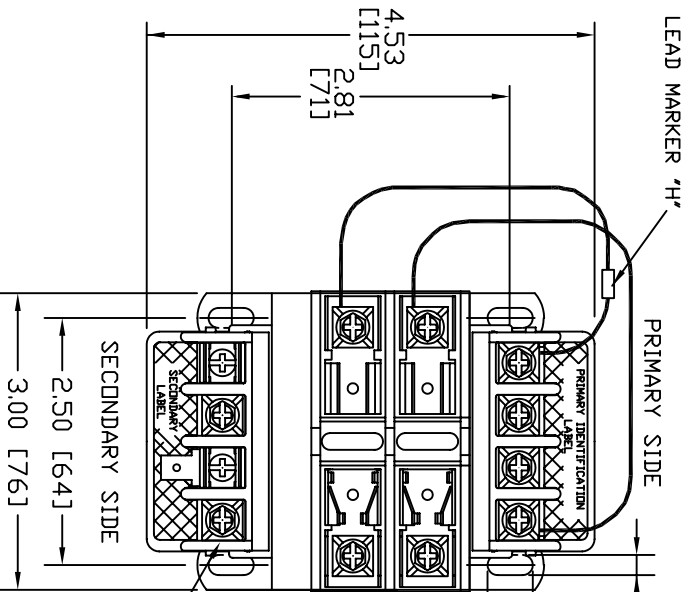



TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

INPUT VOLTAGE		OUTPUT VOLTAGE	
HA-H3	HA-H1	HA-H1	HA-H1
208	240	25	120
200	230	24	115
	220	23	110


NOTE: IF BOTH OUTPUTS ARE USED SWAP/REVERSE FUSING SHOULD BE DONE OFF OF THE TRANSFORMER, WITH X3 REPLACING X2

CONNECTION TABLE LABEL

Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	24/115
RATED V.A.	50
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	4.3 LBS

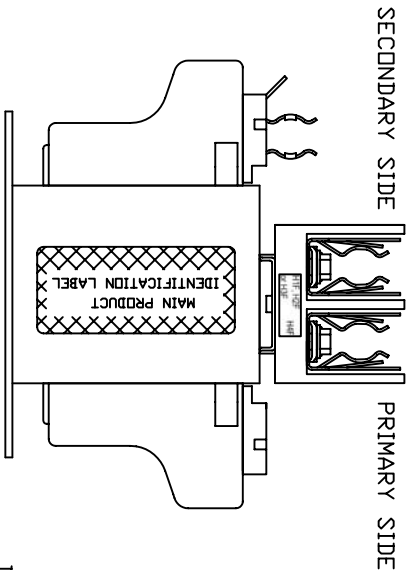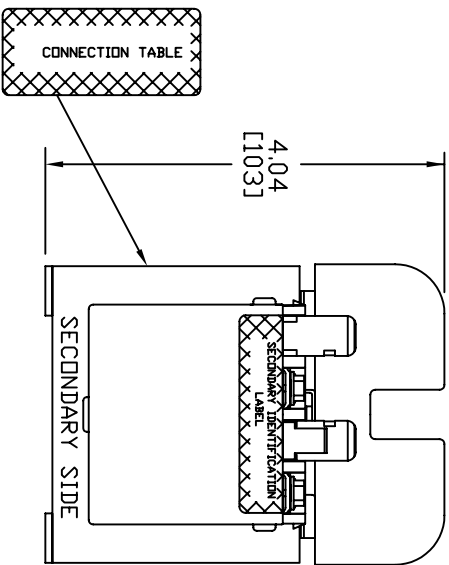


MAIN PRODUCT IDENTIFICATION LABEL




CONNECTION DIAGRAM

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. FUSE CLIPS TO ACCOMADATE 13/32-1 1/2"
 3. ALL MEASUREMENTS IN INCHES (MM)

PRIMARY IDENTIFICATION LABEL

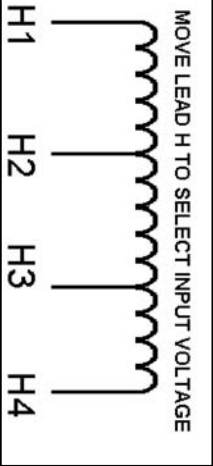

SECONDARY IDENTIFICATION LABEL

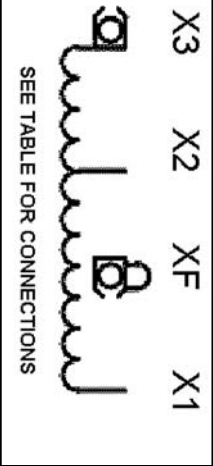

MICRON **ImpervitrAN**
U.S. PAT. NO. 3516040
50VA 50/60Hz
TEMP CL. 105°C
CAT. B050-2000-8
SERIES 2
08083

PACKAGED ACCESSORIES			
1	-		
-	-		
MICRON TRANSFORMER			
DATE: 6/13/07	BY: JGV	CHECKED:	APPROVED:
RELEASE DATE:	DATE:		
MICRON INDUSTRIES CORPORATION 141 GARDEN STREET, SUITE 200 ROCKFORD, IL 61105-1500 www.microntransformer.com			
SIZE: C	SCALE: NONE	B050-2000-8	