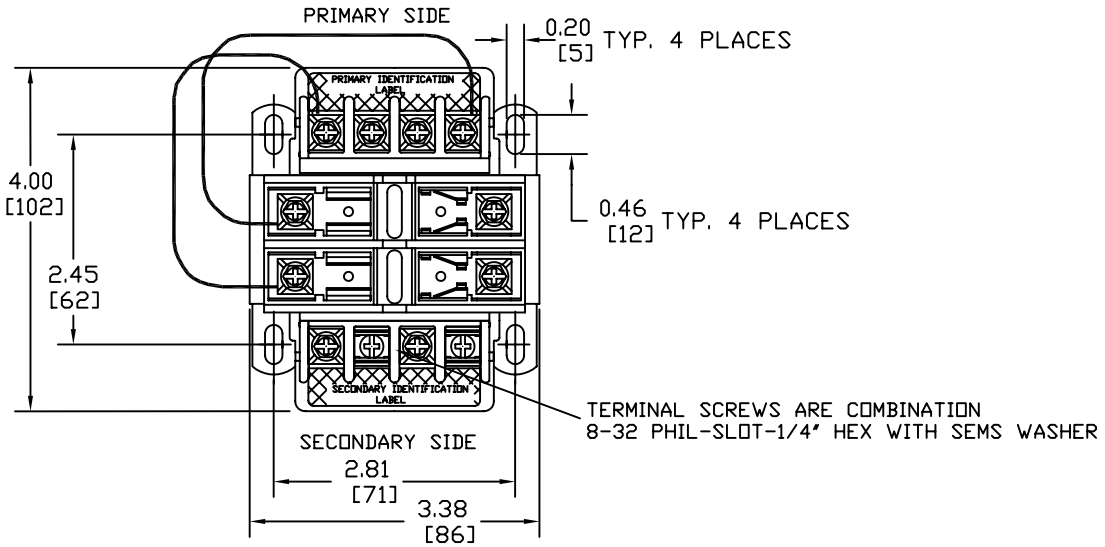

Transformer Specifications	
PRIMARY VOLTAGE(S)	230x460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	115
RATED V.A.	100
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL,CUL
ESTIMATED WEIGHT	4.4 LBS

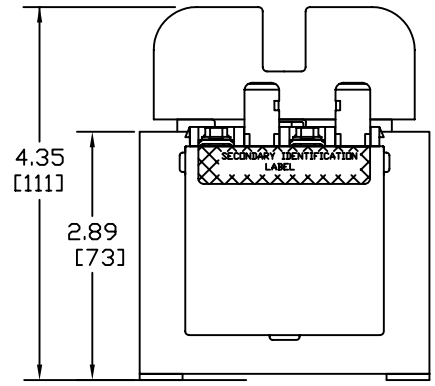

SECONDARY SIDE

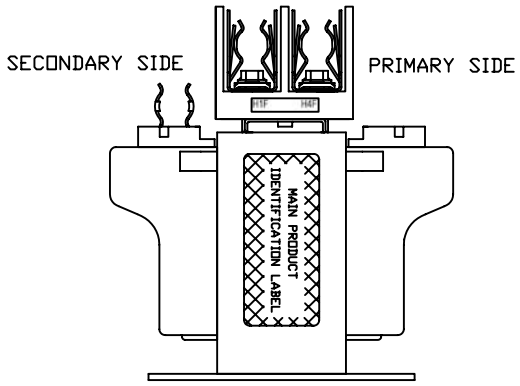



INTERNALLY JUMPERED TO FUSE TERMINAL

CONNECTION DIAGRAM

NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
2. FUSE CLIPS TO ACCOMADATE 13/32-1 1/2"
3. ALL MEASURMENTS IN INCHES (MM)

PRIMARY IDENTIFICATION LABEL

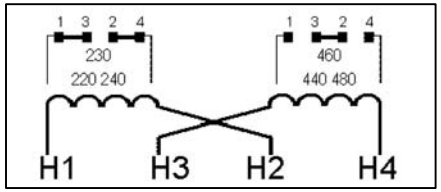

SECONDARY IDENTIFICATION LABEL

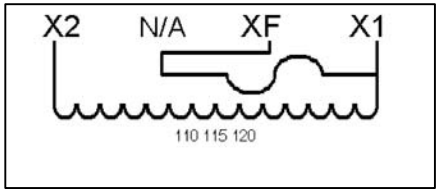

MAIN PRODUCT IDENTIFICATION LABEL

MICRON CONTROL TRANSFORMERS
800 664-4660
www.MicronTransformers.com
ImperviTRAN®
U.S. PAT. NO.3516040
100VA 50/60Hz
TEMP CL. 105°C
c UL us
Listed 702X
CAT. NO. B100BTZ13RB
SERIES 2
05082

PACKAGED ACCESSORIES	
1	PAIR OF J2 JUMPERS
–	–
–	–

MICRON CONTROL TRANSFORMER

MICRON INDUSTRIES CORPORATION
777 CHURCH ROAD - ELMHURST, IL 60126
Tel. (800)664-4660, (630)516-1222 Fax (630)516-1820
www.MicronTransformers.com

DATE	DRAWN	CHECKED	APPROVED
1/16/07	J.G.V		
RELEASE DATE	CUSTOMER PART NO.		

MICRON PART NO.

SIZE	SCALE	
C	NONE	B100BTZ13RB