




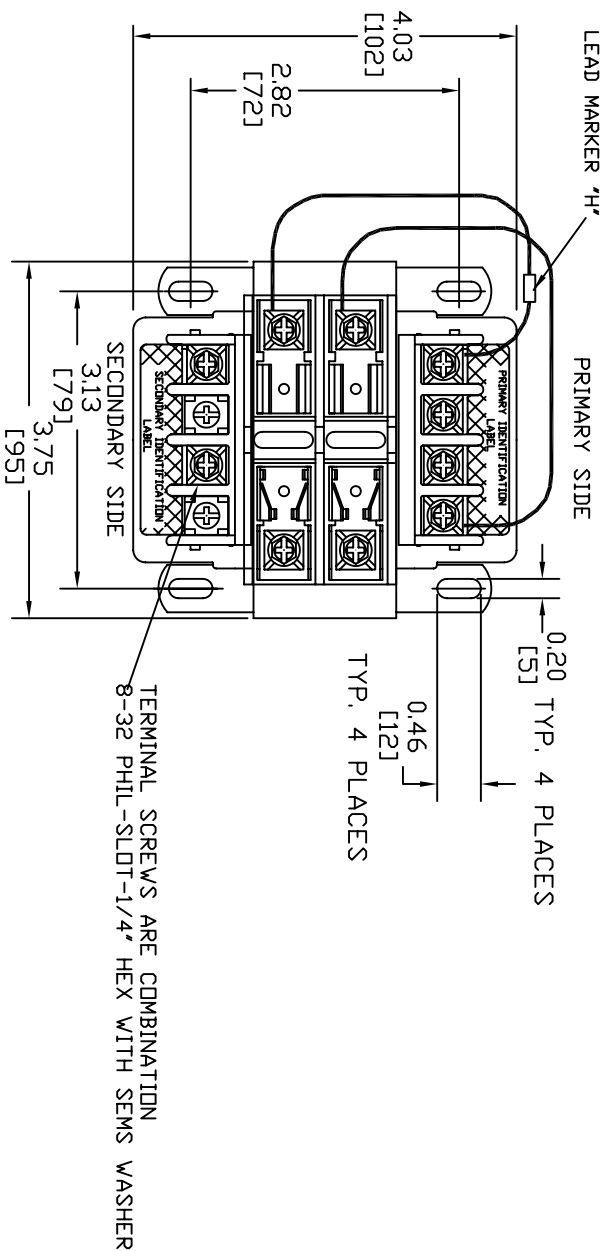


Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460
SECONDARY VOLTAGE(S)	115
RATED V.A.	150
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	5.6 LBS

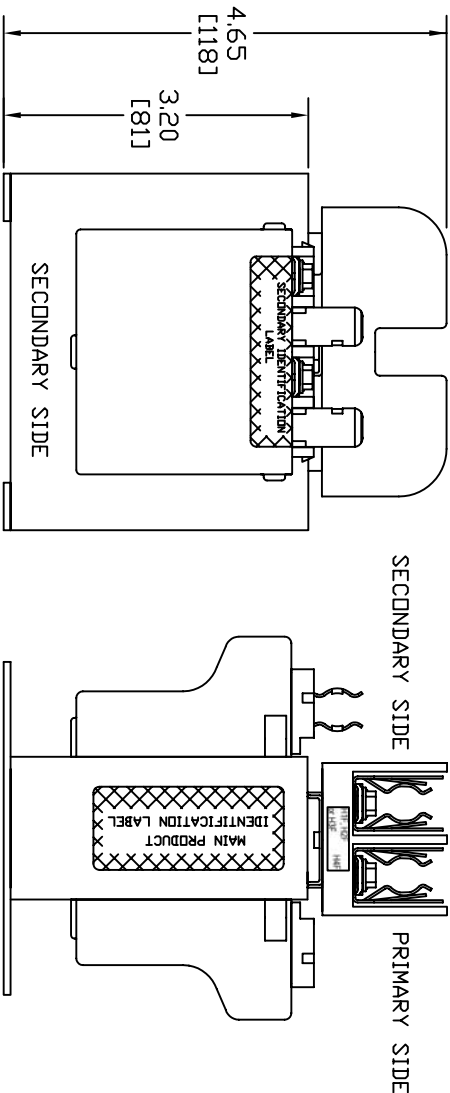


- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. 8-32 PHILLIP SCREW TRUSS SLOT
 3. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 4. ALL MEASUREMENTS IN INCHES (MM)

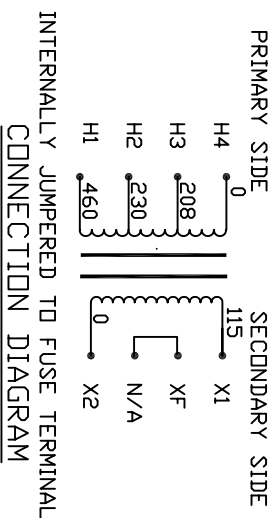

PRIMARY IDENTIFICATION LABEL

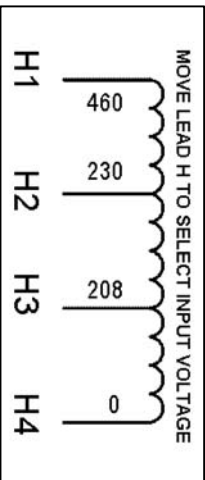

SECONDARY IDENTIFICATION LABEL

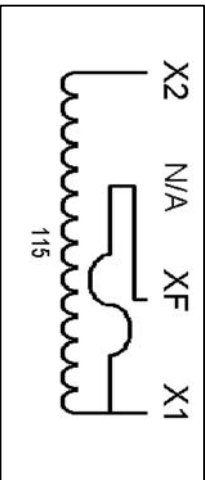

MAIN PRODUCT IDENTIFICATION LABEL

MICRON **ImpervITRAN**
U.S. PAT. NO. 3,516,040
150VA 50/60Hz
TEMP CL. 130°C
CAT. NO. B150MBT13RK
SERIES 2
Listed 702X

PACKAGED ACCESSORIES	
–	
–	
–	
–	
MICRON INDUSTRIES CORPORATION 17000 S. 100TH AVE. SUITE 100 TAMPA, FL 33626 www.microntransformers.com	
DATE 9/18/07	REVISED
REL. DATE	REV. NO.
SIZE	SCALE
C	NONE
B150MBT13RK	