




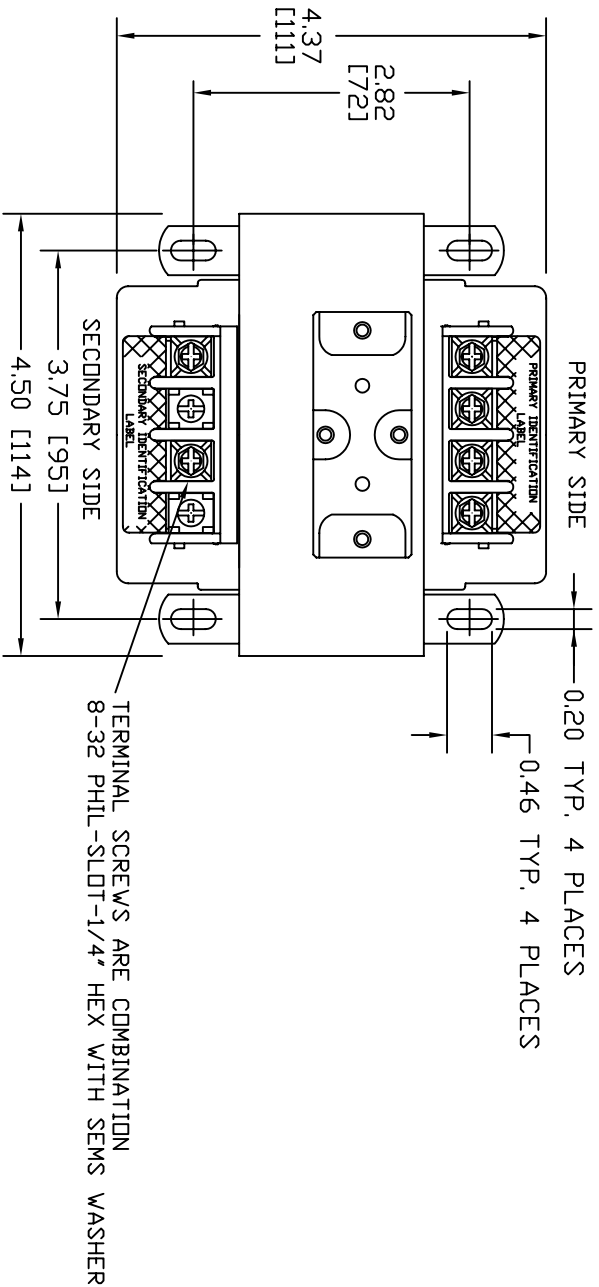


Transformer Specifications	
PRIMARY VOLTAGE(S)	230x460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	115
RATED V.A.	250
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	9.3 LBS

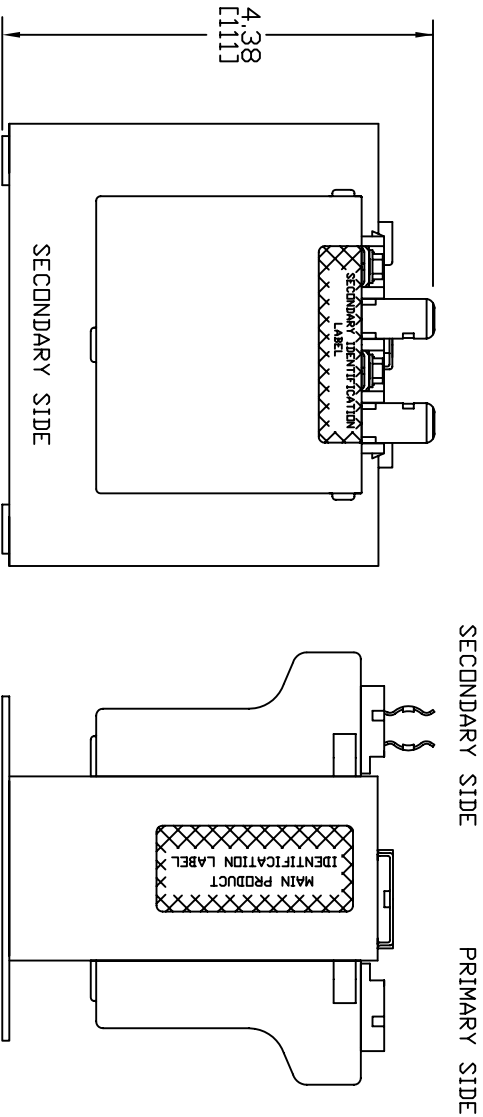


- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 3. ALL MEASUREMENTS IN INCHES (MM)

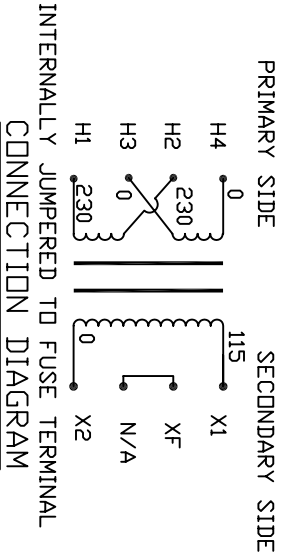

PRIMARY IDENTIFICATION LABEL

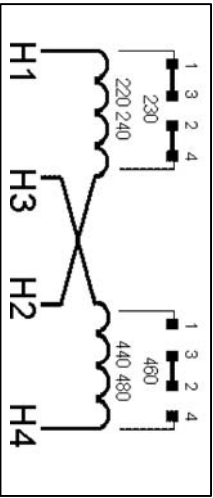

SECONDARY IDENTIFICATION LABEL

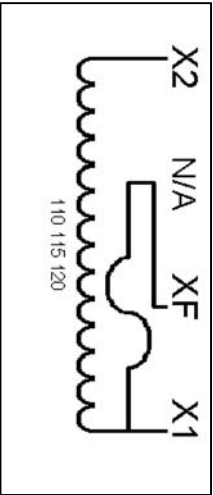

MICRON TRANSFORMER CONTROL
800 664-4660
www.microntransformers.com

Imperitrans
U.S. PAT. NO. 3,516,040


250VA 50/60Hz
TEMP CL. 130°C

CAT. NO. B250BTZ13JKF
SERIES 2

06085

UL US LISTED 702X

MAIN PRODUCT IDENTIFICATION LABEL

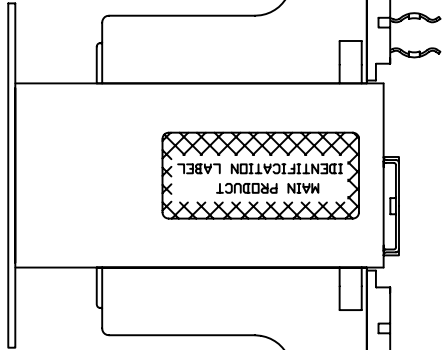

PACKAGED ACCESSORIES

1 PAIR OF JUMPERS

MICRON INDUSTRIES CORPORATION
17000 GARDEN GROVE BLVD., SUITE 100
GARDEN GROVE, CA 92641-1000
www.microntransformers.com

DATE	11/26/07	REVIEW	DATE	11/26/07
DESIGNED BY	J.G.V.	CHECKED BY	DATE	11/26/07

SIZE	SCALE	DATE	11/26/07
C	INDIC	DATE	11/26/07
B250BTZ13JKF			