

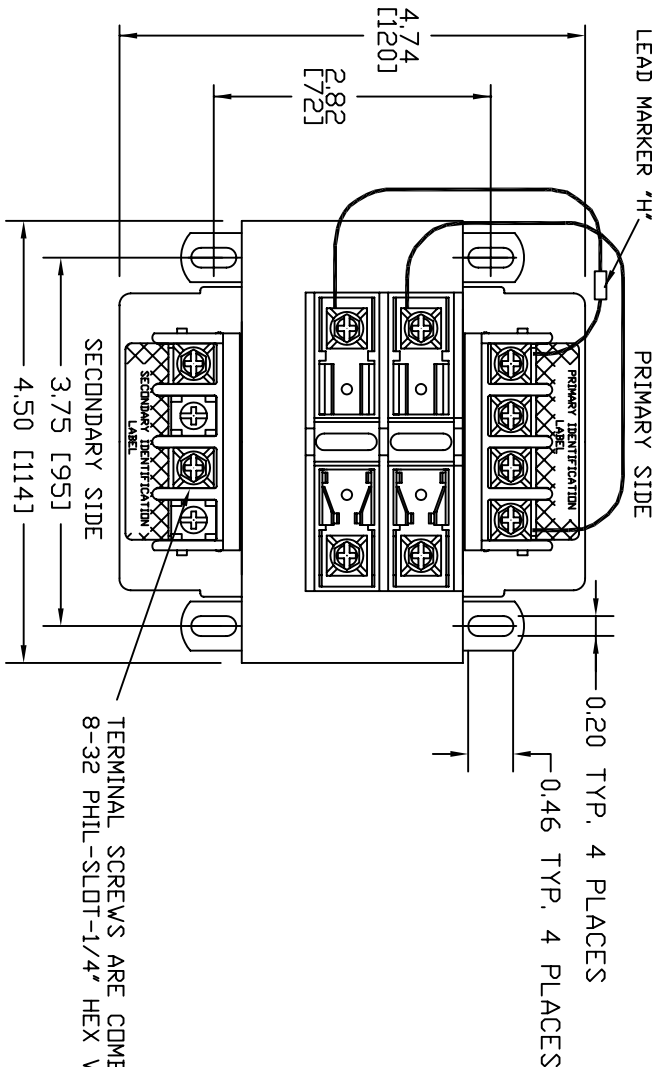


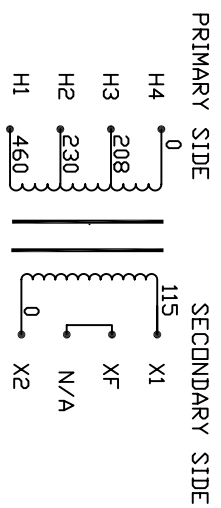


Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460
SECONDARY VOLTAGE(S)	115
RATED V.A.	250
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	10.8 LBS

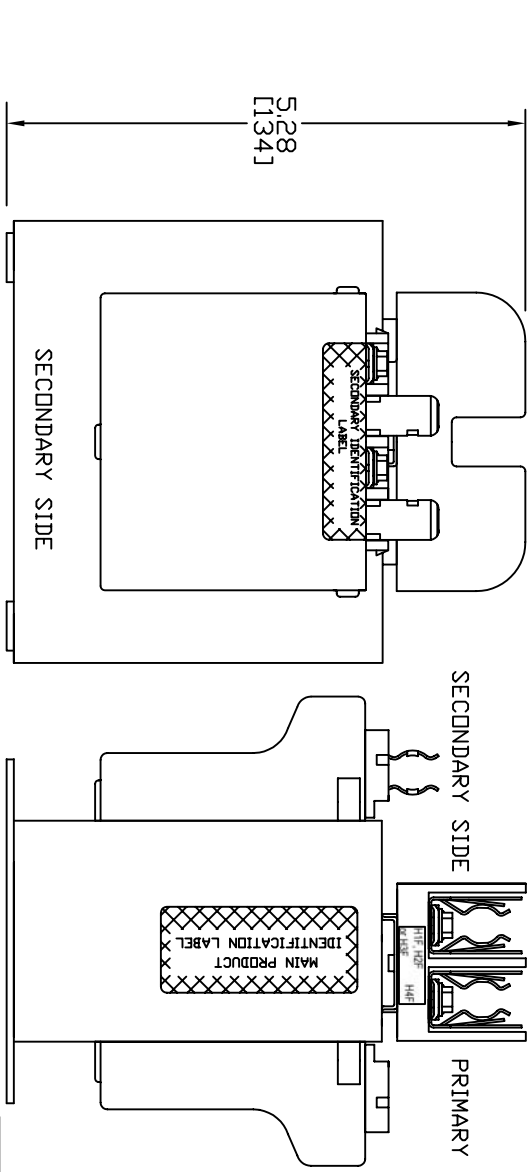

NOTE:

1. TORQUE CONNECTIONS TO 16 LB-IN
2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
3. ALL MEASUREMENTS IN INCHES (MM)

INTERNALLY JUMPERED TO FUSE TERMINAL CONNECTION DIAGRAM

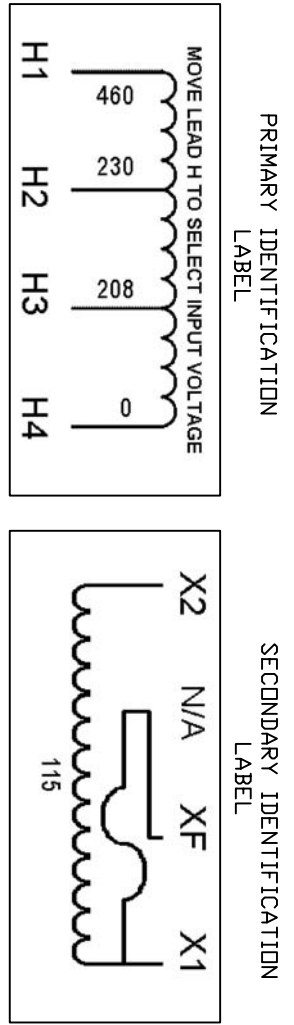

MICRON
TRANSFORMERS
800.444.4600
www.microntransformers.com

Impervitrans
U.S. PAT. NO. 3,516,040

250VA 50/60Hz
TEMP CL. 130°C

CAT. NO. B250MBT13RKF
SERIES 2

Listed 702X 09081

PACKAGED ACCESSORIES	
-	-
-	-
MICRON INDUSTRIES CORPORATION TRANSFORMER 141 680644-4601 680916-1822 Fax 680916-1820 www.microntransformers.com	
DATE 12/21/07	DESIGNED BY
RELIEF DATE	APPROVED
SIZE C	NAME B250MBT13RKF