





Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	24/115
RATED V.A.	250
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	11.3 LBS

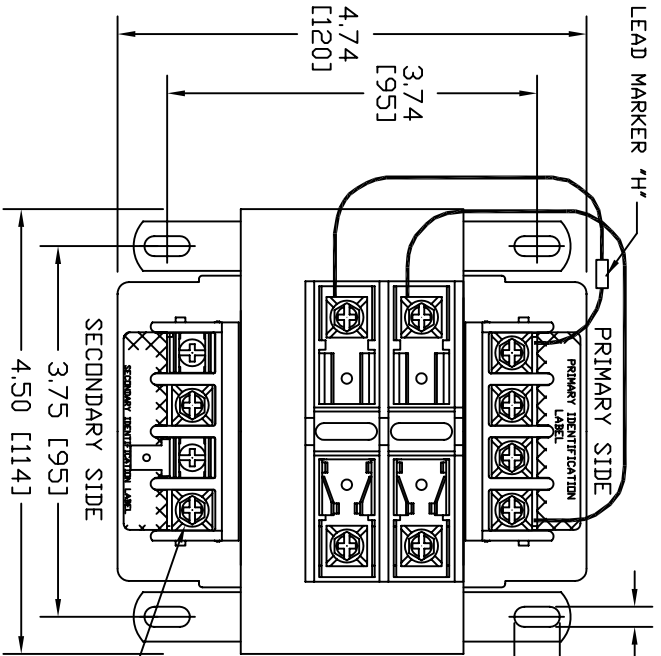

INPUT VOLTAGE		OUTPUT VOLTAGE	
H4-H3	H4-H2	H4-H1	XF-X2
208	230	24	115
220	440	23	110

NOTE: IF BOTH OUTPUTS ARE USED SIMULTANEOUSLY FUSING SHOULD BE DONE OFF OF THE TRANSFORMER WITH X3 REPLACING XF

TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

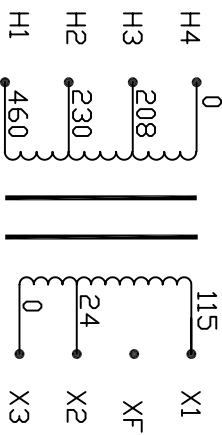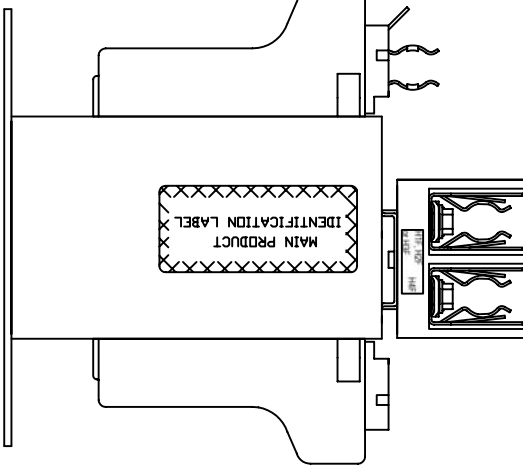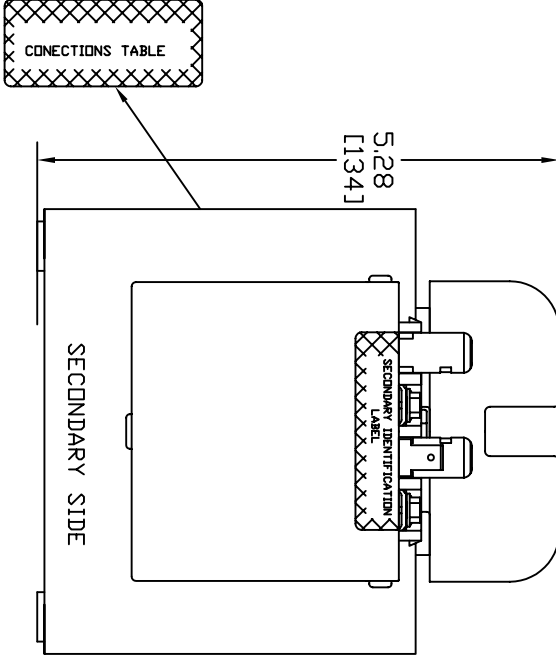



- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 3. ALL MEASUREMENTS IN INCHES (MM)

CONNECTION DIAGRAM

MAIN PRODUCT IDENTIFICATION LABEL

PRIMARY IDENTIFICATION LABEL

SECONDARY IDENTIFICATION LABEL

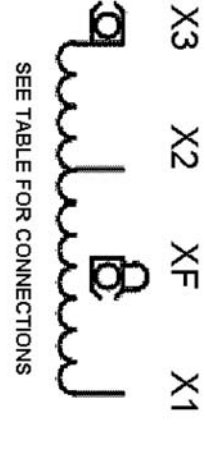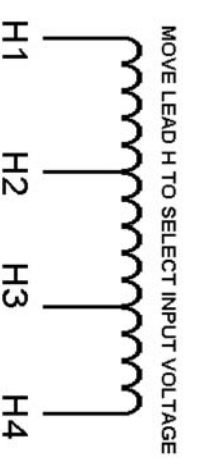

MICRON **Impervitran**
U.S. PAT. NO. 3516040
250VA 50/60Hz
TEMP CL. 130°C
CAT. NO. B250-2005-8F
SERIES 2
11084

PACKAGED ACCESSORIES			
DATE	3/18/08	BRAND	JLG V
RELEASE DATE		DESIGNER	
TESTER		APPROVER	
SIZE	SCALE	DATE	
C	INDIC		
B250-2005-8F			