
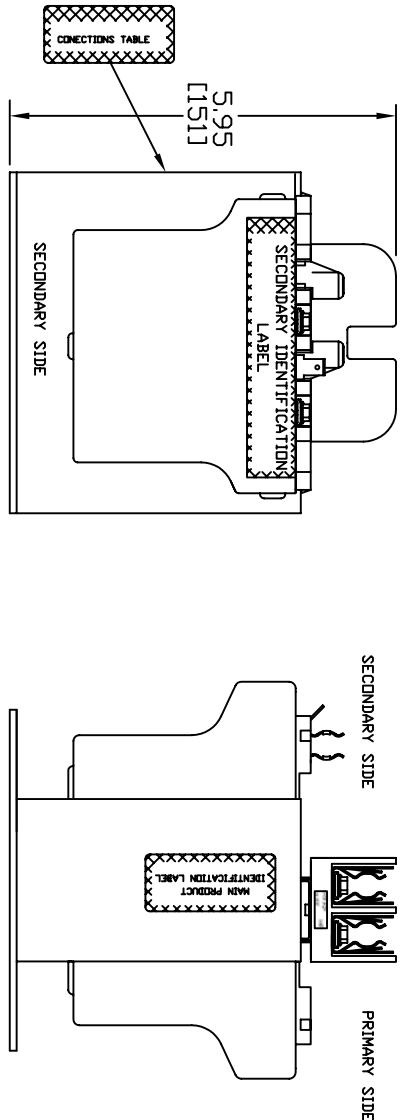



Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE)
SECONDARY VOLTAGE(S)	24/115
RATED V.A.	300
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL,CUL
ESTIMATED WEIGHT	14.1 LBS

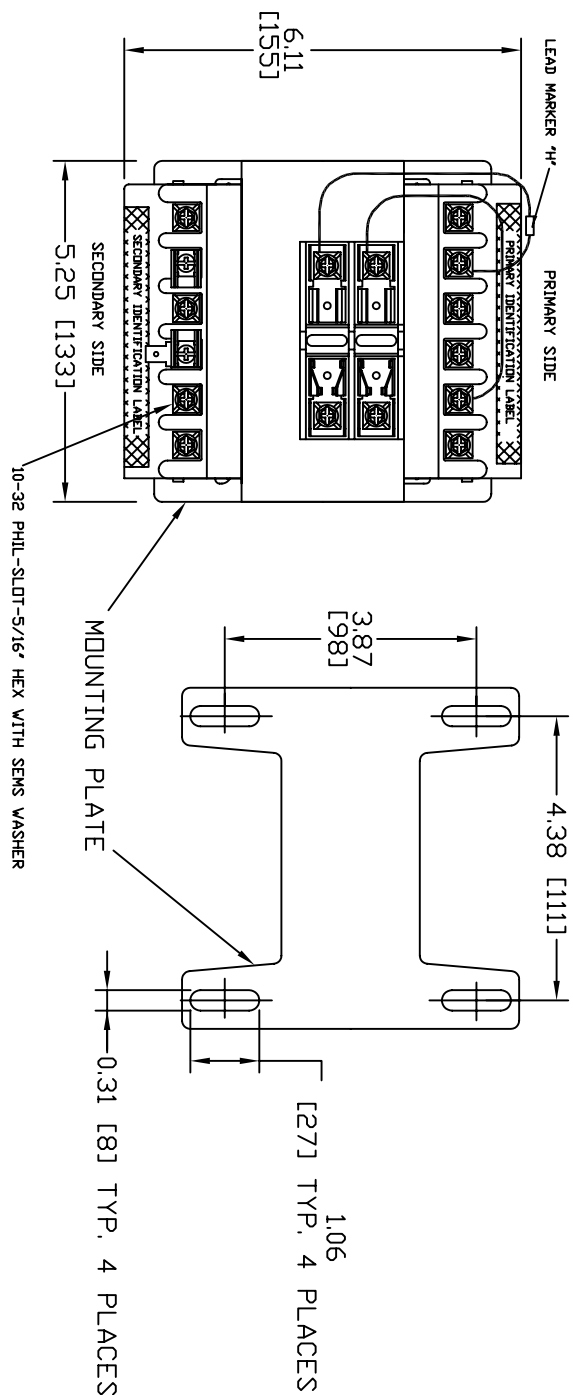

CONNECTION TABLE LABEL

IN-OUT	VOLTAGE	IN-OUT	VOLTAGE
H4-H3	115/125	H4-H1	24
H3-H2	208	H3-H1	24
H2-H1	230	H2-H1	24
H1-H0	460	H1-H0	24
H0-H0	230	H0-H0	24

NOTE: IF BOTH OUTPUTS ARE USED, BALANCE/UNBALANCE SHOULD BE DONE OUT OF THE TRANSFORMER, NOT BY REWINDING IT.





- NOTE:
1. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 2. ALL MEASUREMENTS IN INCHES (MM)

MAIN PRODUCT
IDENTIFICATION LABEL

PRIMARY IDENTIFICATION
LABEL

SECONDARY IDENTIFICATION
LABEL

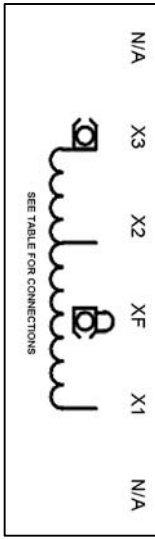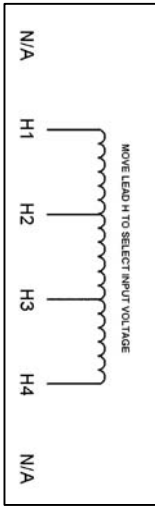

MICRON **Impervitran**
U.S. PAT. NO. 3,616,040
300VA 50/60Hz
TEMP CL. 130°C
CAT. B300-2006-8F
SERIES 2
Listed 702X 07085

PACKAGED ACCESSORIES	
1	-
-	-
-	-
MISCELLANEOUS INFORMATION	
DATE	10/31/07
BY	JGV
REVISION	000000
APP'D	000000
SIZE	300VA
CODE	B300-2006-8F