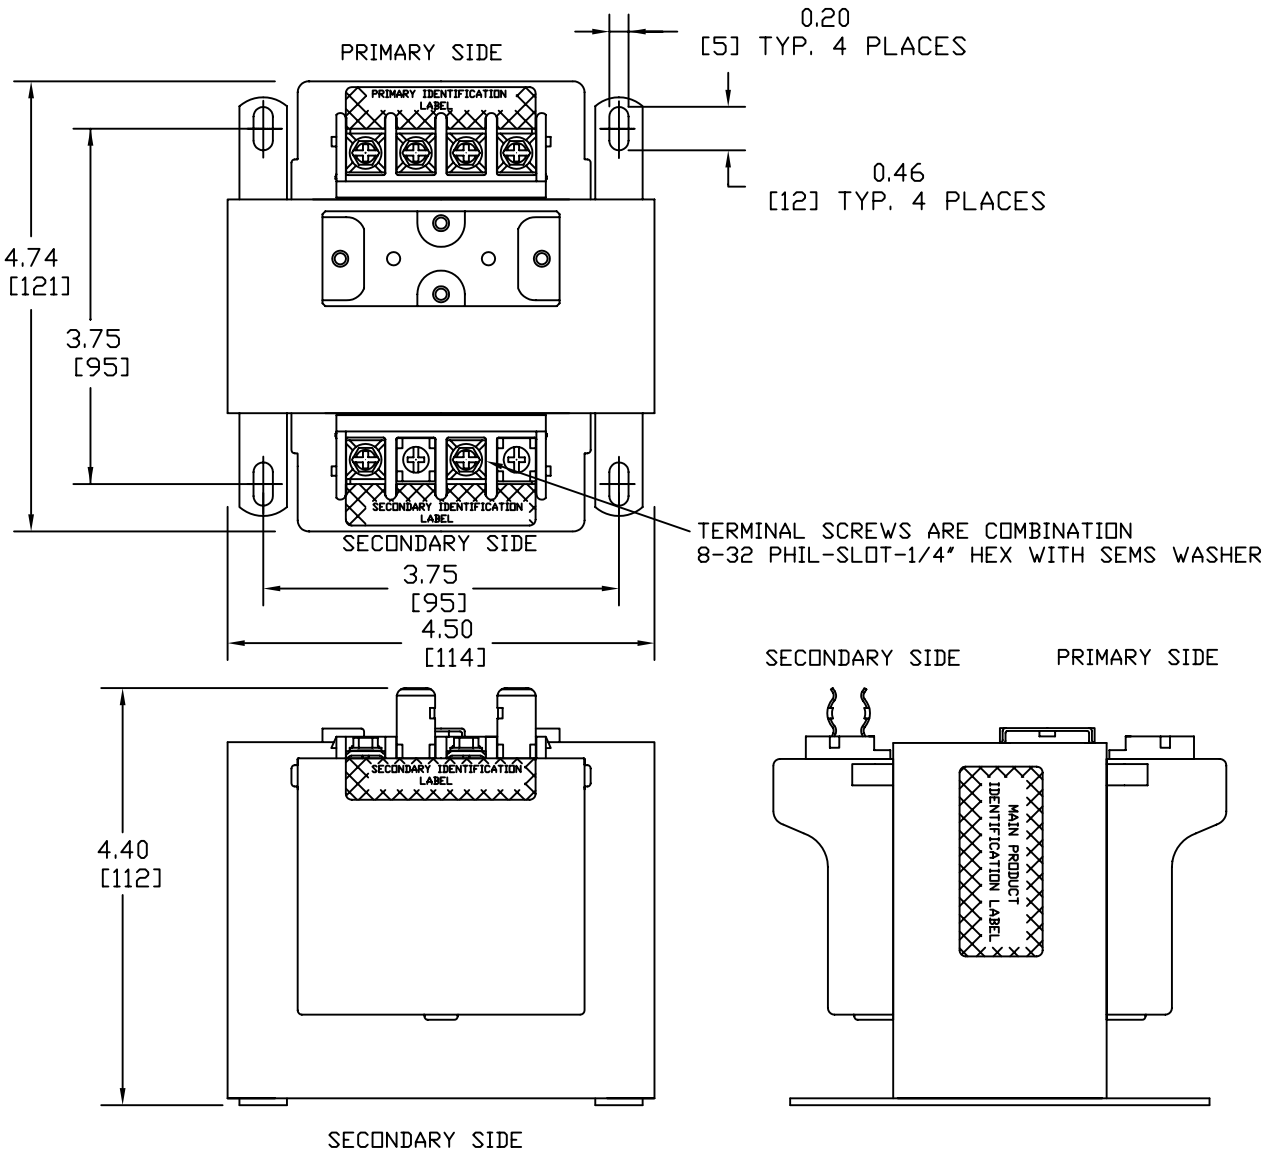

Transformer Specifications	
PRIMARY VOLTAGE(S)	230x460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	115
RATED V.A.	350
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	11.6 LBS

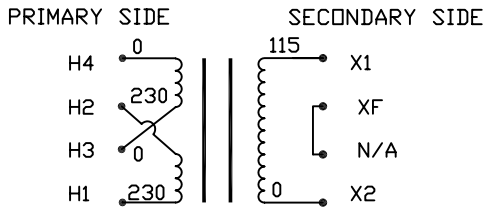

INTERNALLY JUMPERED TO FUSE TERMINAL

CONNECTION DIAGRAM

NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
2. FUSE CLIPS TO ACCOMADATE 13/32-1 1/2"
3. ALL MEASURMENTS IN INCHES (MM)

PRIMARY IDENTIFICATION LABEL

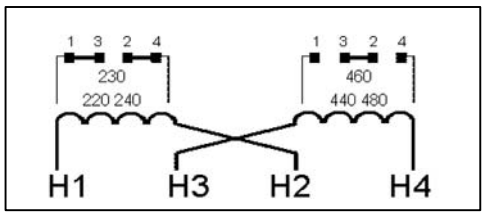

SECONDARY IDENTIFICATION LABEL

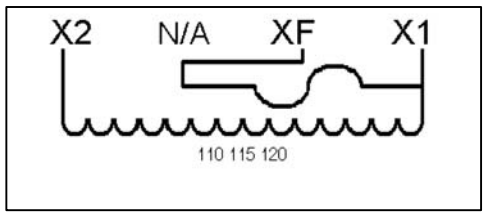

MAIN PRODUCT IDENTIFICATION LABEL

MICRON CONTROL TRANSFORMERS
800 664-4660
www.MicronTransformers.com
ImperviTRAN ®
U.S. PAT. NO.3516040
350VA 50/60Hz
TEMP CL. 130°C
c UL us
Listed 702X
CAT. NO. B350BTZ13JKF
SERIES 2
06081

PACKAGED ACCESSORIES	
1	1 PAIR OF JUMPERS
–	–
–	–

MICRON CONTROL TRANSFORMER
MICRON INDUSTRIES CORPORATION
777 CHURCH ROAD - ELMHURST, IL 60126
Tel. (800)664-4660, (630)516-1822 Fax (630)516-1820
www.MicronTransformers.com

DATE	DRAWN	CHECKED	APPROVED
11/26/07	J.G.V		
RELEASE DATE	CUSTOMER PART NO.		

MICRON PART NO.

SIZE	SCALE	
C	NONE	B350BTZ13JKF