



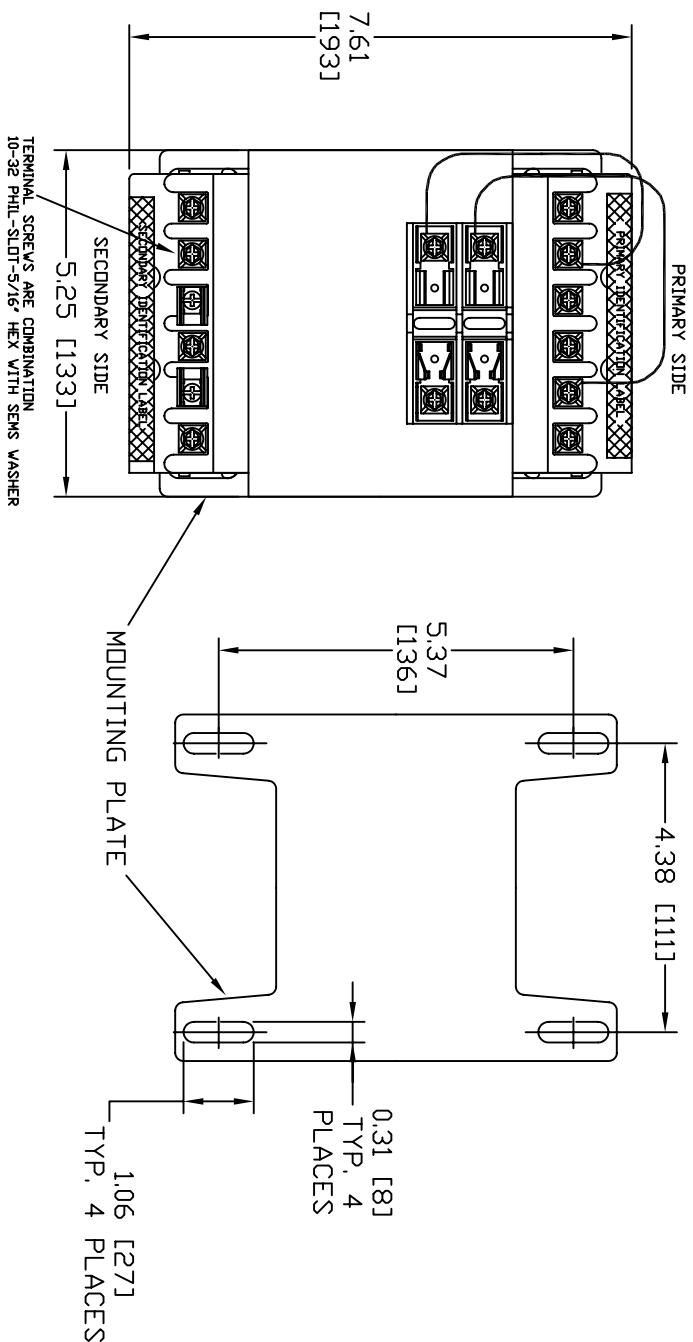


Transformer Specifications	
PRIMARY VOLTAGE(S)	230/460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	115
RATED V.A.	750
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	26.5 LBS

TEST REQUIREMENTS					
WINDING	H4-H3	H2-H1	X2-X1		
D.C. VOLTS	240	240	125.3		
LOAD VOLTS	240	240	120		
F.L. AMPS	1.858	1.858	6.250		
HI-PIOT	4800V		3000V		
EXCITING AMPS	0.65AMPS @ 240 VOLTS, 50HZ				
EXCITING WATTS	33.0 MAX				




INTERNALLY JUMPERED TO FUSE TERMINAL
CONNECTION DIAGRAM

- NOTE:
1. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 2. ALL MEASUREMENTS IN INCHES (MM)

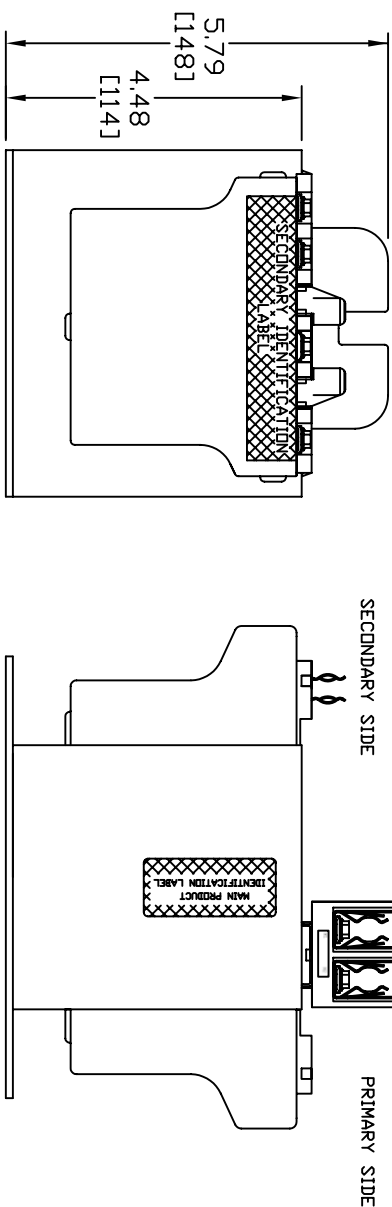


MAIN PRODUCT
IDENTIFICATION LABEL

PRIMARY IDENTIFICATION
LABEL

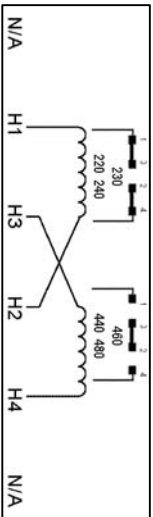

SECONDARY IDENTIFICATION
LABEL

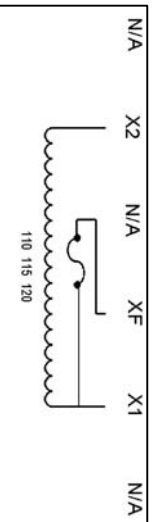

MICRON CONTROL TRANSFORMERS 800 664-4660 www.MicronTransformers.com		ImpervITRAN U.S. PAT. NO. 3,518,040 750VA 50/60Hz TEMP CL. 130°C	
CAT. B750BTZ13RBF SERIES 2		LISTED TOXZ	
DATE 11/21/07 BY JUV DATE 11/21/07		DATE 11/21/07 BY JUV DATE 11/21/07	
SIZE SCALE C INCH		B750BTZ13RBF	