

Nora Lighting's IC recessed 4" housing allows the use of R/PAR20, PAR16 designer light sources in insulated ceiling environments. Rated for direct contact with thermal insulation, Nora's 4" IC housing is quick to install, accepts a wide variety of high quality trims, and is airtight built for energy savings.

Minimum Clearances: "IC" Housing is direct contact rated; no minimum clearance is required

Ceiling Thickness: Ceiling thickness varies from 5/8" 1-1/4"

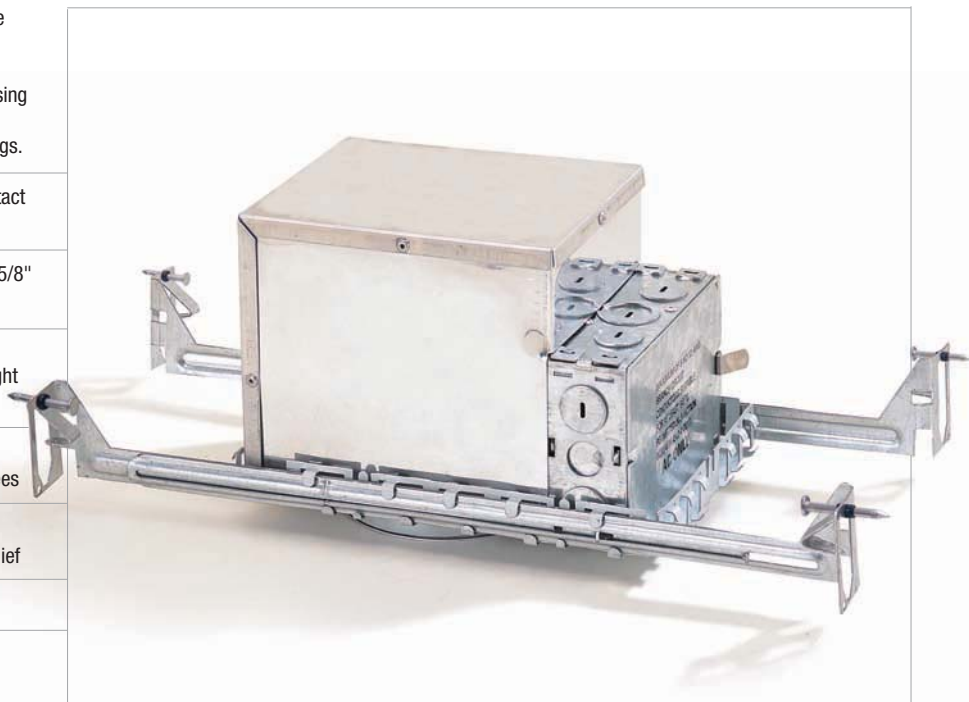
Lamp Adjustment: Socket mounting plate allows slight adjustment to fine tune for best possible light distribution

Bar Hangers: Bar hangers are adjustable from 13-5/8" to 24" and can be repositioned 90 degrees

Junction Box: Contains two 3/4", three 1/2" knockouts and four Romex pryouts with strain relief

Electrical: Quick Connectors provided

Listing: UL Damp Location w/ Feed Through WSEC ASTM E283 for Air Tight (AT)


NSIC-401QAT

4" IC Designer Housing • Quick Connect • Airtight

50W

