


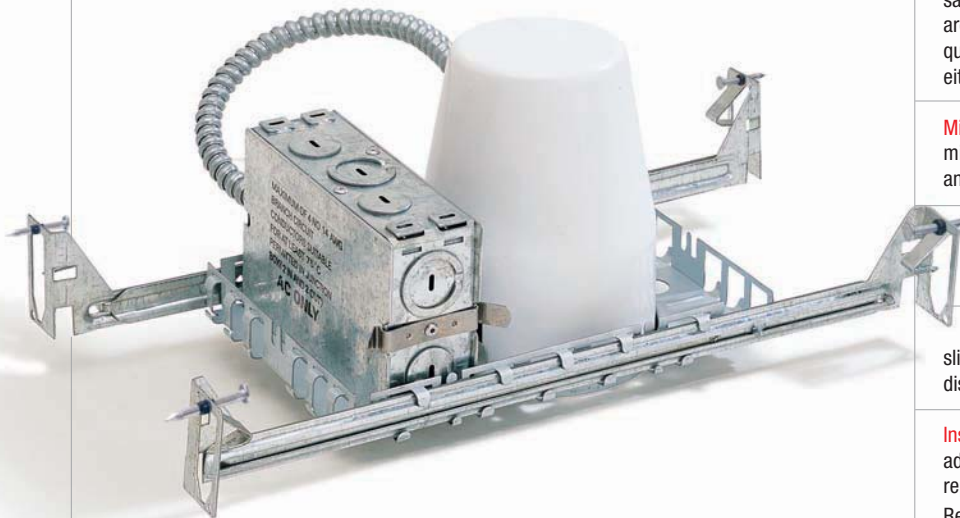

NS-401Q	4" Designer Housing • Quick Connect	50W
NS-401QAT	4" Designer Housing • Quick Connect • Airtight	50W

Nora Lighting's recessed 4" housings deliver ultra-high design quality in any application with minimal apertures ideal for R/PAR20, PAR16 designer light sources. Available in both standard and energy savings airtight configurations, Nora's 4" products are quick to install and accept a wide variety of high quality, attractive finishing trims. Housings available either as new construction or remodel

Minimum Clearances: Non-IC housings require minimum clearances of 3" from thermal insulation and 1/2" from adjacent building components

Ceiling Thickness: Ceiling thickness varies from 5/8" – 1-1/4" (remodels can accept 3/8" minimum ceiling thickness)

Lamp Adjustment: Socket mounting plate allows slight adjustment to fine tune for best possible light distribution

Installation: New Construction: Bar hangers are adjustable from 13-5/8" to 24" and can be repositioned 90 degrees

Remodel: High tension tempered steel springs secure remodel housings evenly to ceiling; hole cutout template provided for convenience.

Junction Box: Contains two 3/4", three 1/2" knockouts and four Romex pryouts with strain relief

Electrical: Quick Connectors provided

Listing: UL Damp Location w/ Feed Through WSEC ASTM E283 for Air Tight (AT only)



NSR-404Q	4" Designer Remodel Housing • Quick Connect	50W
NSR-404QAT	4" Designer Remodel Housing • Quick Connect • Airtight	50W

