

LED LIGHTING

Medium Vaportite Wall Mount LED

Lower Wattage & Higher Output

VTW13LED



SPECIFICATIONS

- cULus Listed for wet locations.
- Energy Savings Solutions.
- RoHS Compliant.


WARRANTY

- 5-year Limited.
- See website for details. www.nsiindustries.com

For Incandescent models see page 316.

FEATURES



- Die cast aluminum housing.
- Silver finish.
- UV stabilized powder coated finish.
- Uniform light distribution.
- Color temperature - 5000K.
- Heat & impact resistant tempered glass lens.
- IP65 Rated & IC protection.

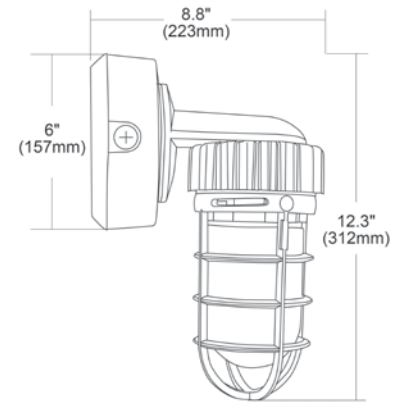

CAT. NO.	SYSTEM WATTS	LUMEN OUTPUT	COLOR	LM/W	INPUT VOLTAGE	COLOR RENDERING INDEX (CRI)	STARTING TEMP.	EQUIVALENT
VTW13LED	12.6	636lm**	5000K	50	120-277VAC	70+	-40 °C	50W-70W MH

**DISCLAIMER: this test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture.

PHOTOMETRIC REPORTS

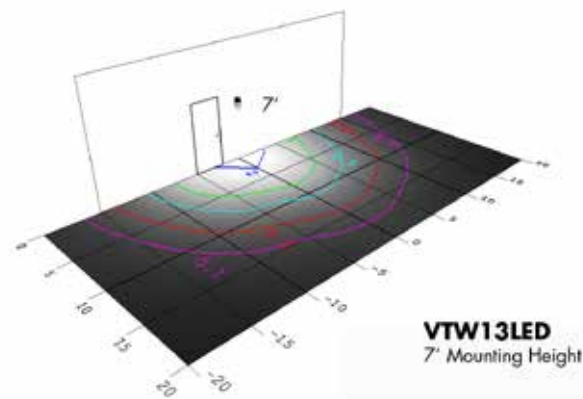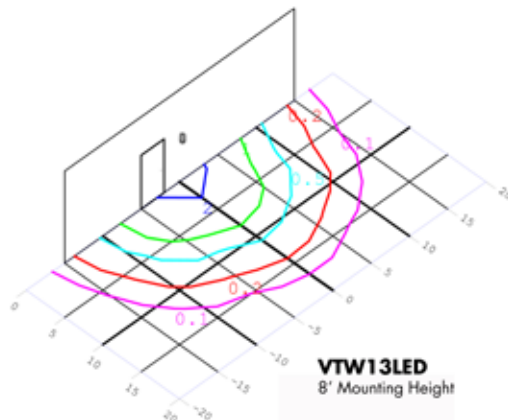

Scan QR code for
mobile access to
LED spec sheets

