


SKINTOP® MS-M-XL

SKINTOP® MS-M-XL, metric nickel-plated brass cable gland with wide, variable clamping ranges, especially for thick walls



Variety of approval certifications

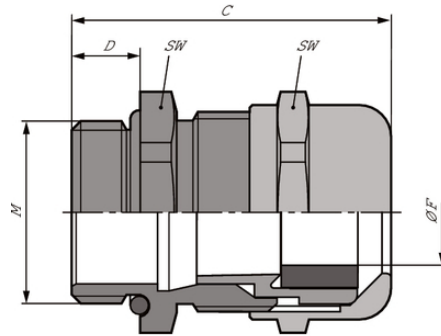

Temperature-resistant



Acid-resistant



Optimum strain relief



Mechanical resistance



Corrosion-resistant

Benefits

Especially for thick walls
High functional reliability
Optimum strain relief
Wide, variable clamping ranges

Application range

With long connection thread for applications with thicker walls.

Norm references / approvals

UL file no. E79903

SKINTOP® MS-M-XL

Design

Metric connection thread according to DIN EN 60423

Basis for technical information DIN IEC 62444

Note

Counter nut to be used: SKINDICHT® SM-M

Refer to SKINTOP® metric accessories for suitable accessories

Technical Data

Classification:	ETIM 5.0 Class-ID: EC000441 ETIM 5.0 Class-Description: Cable gland
Caution:	Refer to T21 for the installation dimensions and tightening torques
Material:	Body: Nickel-plated brass Insert: Polyamide Sealing ring: CR O-ring: NBR
Protection rating:	IP 68 - 10 bar IP 69
Temperature range:	dynamic -25°C up to +100°C static: -40°C to +100°C

Note

Photographs are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.



SKINTOP® MS-M-XL

Article number	Article designation / size	Clamping range ØF (mm)	SW mm	Total length C (mm)	Thread length, D (mm)
SKINTOP® MS-M-XL					
53112005	M 12 x 1,5	3 - 7	16	32.8	12
53112015	M 16 x 1,5	4.5 - 10	20	37	12
53112025	M 20 x 1,5	7 - 13	24	39.5	12
53112035	M 25 x 1,5	9 - 17	29	41.5	12
53112045	M 32 x 1,5	11 - 21	36	48.2	15
53112055	M 40 x 1,5	19 - 28	45	53.5	15
53112065	M 50 x 1,5	27 - 35	54	57	15

Last Update (22.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16