

SPECIFICATION & FEATURES

DESCRIPTION:

Orbit Industries' zinc die-cast insulated throat connectors are used with metallic and non-metallic liquid-tight conduit. When flexibility is required for the installation, operation, or maintenance of electrical appliances, type B conduits and fittings are used.

ZINC DIE CAST INSULATED 90 DEG ANGLE LIQUID TIGHT CONNECTORS



CERTIFICATION:


UL file E310658, Conforms to UL 514B



FEATURES:

- Zinc Die Cast
- With Insulated Throat
- Insulated Color May Vary

LINE DRAWINGS:

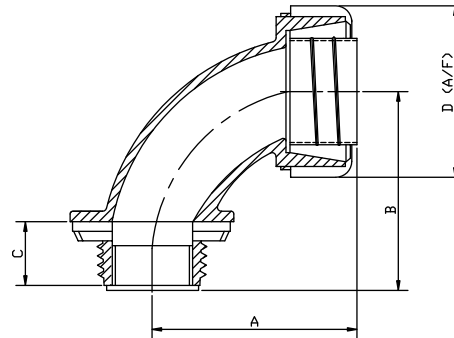

CONFIGURATION DATA:

Part No.	Trade Size	A (in)	B (in)	C (in)	D (in)	Std.Pkg.	Master Ctn.
LT190-38	3/8"	1.752	1.457	0.512	1.299	15	150
LT190-50	1/2"	1.831	1.516	0.512	1.299	15	150
LT190-75	3/4"	1.988	1.909	0.512	1.575	10	100
LT190-100	1"	2.717	2.087	0.650	1.811	5	50
LT190-125	1-1/4"	2.717	2.264	0.650	2.264	4	40
LT190-150	1-1/2"	2.933	2.539	0.650	2.520	2	20
LT190-200	2"	3.169	2.776	0.650	2.992	1	10
LT190-250	2-1/2"	4.528	3.524	0.965	3.740	1	10
LT190-300	3"	5.039	3.957	0.965	4.350	1	4
LT190-350	3-1/2"	5.748	4.114	0.965	4.862	1	3
LT190-400	4"	5.965	4.350	0.965	5.217	1	3

