

SPECIFICATION & FEATURES

STEEL EMT COUPLINGS SET-SCREW TYPE 2-1/2" ~ 4"

DESCRIPTION:

Orbit Industries' set-screw steel EMT couplings are used in dry locations to connect the ends of two EMT thinwall conduits together to extend the raceway. The steel construction ensures mechanical protection and the connection between one conduit to another.. In addition, in damp locations, set-screw couplings are of excellent corrosion protection with zinc electroplated. Orbit Industries' set-screw couplings are made with a diverse combination head screw that can securely fasten one conduit to another using a slotted Phillips, or Robertson head screw driver.

CERTIFICATION:


UL file E310658, conforms to UL 514B



FEATURES:

- Steel
- Zinc Electro-Plated
- Concrete-Tight when Taped
- Suitable for applications above 600V
- Sizes 2-1/2" to 4" are also listed for RIGID and IMC conduits

LINE DRAWINGS:

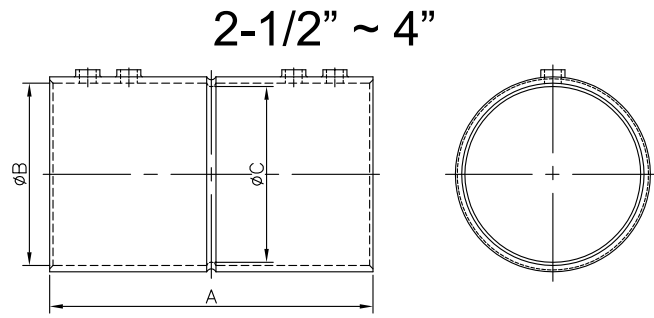

CONFIGURATION DATA:

Part No.	Trade Size	A (in)	B (in)	C (in)	Screw Size	Std.Pkg.
OF7717	2-1/2"	4.272	2.921	2.807	1/4"-28 UNF X 0.41in FHCP OR 1/4"-20 UNC X 0.41in FHCP	12
OF7718	3"	4.528	3.547	3.429	1/4"-28 UNF X 0.41in FHCP OR 1/4"-20 UNC X 0.41in FHCP	12
OF7719	3-1/2"	4.724	4.047	3.929	1/4"-28 UNF X 0.41in FHCP OR 1/4"-20 UNC X 0.41in FHCP	6
OF7720	4"	4.961	4.547	4.429	1/4"-28 UNF X 0.41in FHCP OR 1/4"-20 UNC X 0.41in FHCP	6

