

SPECIFICATION & FEATURES


4" CEILING FAN & LIGHT FIXTURE SUPPORT PRODUCTS

DESCRIPTION:

Orbit Industries' Ceiling fan and light fixture support boxes are used to install ceiling fans, lighting fixtures, and other electrical devices. The various models include octagon and pancake box types and bar hangers for new construction and old work. Also included is a plastic non-metallic sheathed cable connector and a hardware pack with a variety of fasteners for all installation types.

CERTIFICATION:

UL file E227970, conforms to UL514A. acceptable for use in 2-hour fire rated walls.

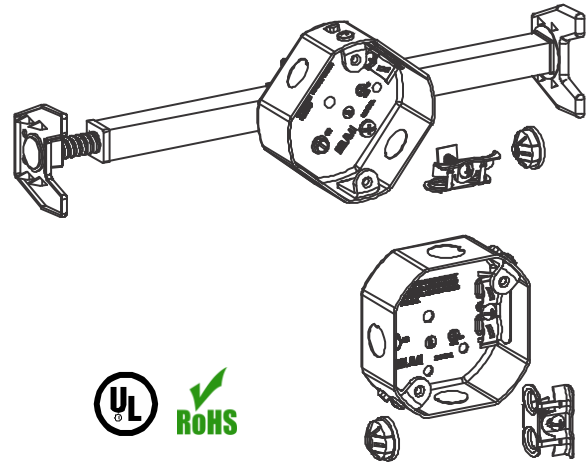

FEATURES

General:

Easy-to-follow Instruction Sheet (A)(C)(D); Complies with NEC 314.27 for up to 70 lbs. of ceiling fan load or 70 lbs. of fixture load.

Bar Hanger:

NBH: New Construction Bar Hanger slides apart to fit joist spacing from 16" to 24"


OBH: Old Work Bar Hanger for joist spacing from 16" to 24", No tools necessary for expansion of the bar

BX/MC Clamp:

All MC series boxes are suitable for use with MCAP™ - Aluminum (MCAP is a trademark of Southwire Company)

Bracket:

FB: Flush-Mounts on flat side of stud or joist

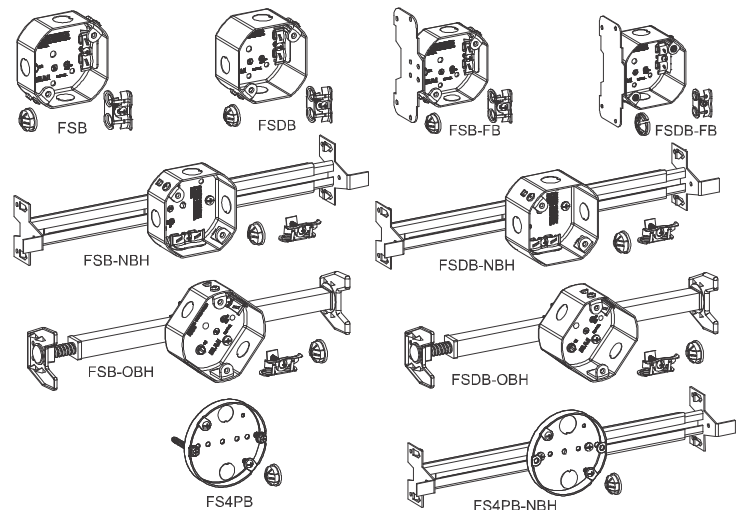

CONFIGURATION DATA

Catalog No.	Depth	Clamp Type	Bracket & Setback	Knockouts	Cu.In.	Std. Pkg.
FSB	1-1/2"	BX/MC,NM	-	(3)-1/2", (2)-Loom	15.5	20
FSDB	2-1/8"	BX/MC,NM	-	(3)-1/2", (2)-Loom	21.5	20
FSB-FB	1-1/2"	BX/MC,NM	FB,1/2"	(2)-1/2", (2)-Loom	15.5	20
FSDB-FB	2-1/8"	BX/MC,NM	FB,1/2"	(2)-1/2", (2)-Loom	21.5	20
FSB-NBH	1-1/2"	BX/MC,NM	NBH,16" TO 24"	(3)-1/2", (2)-Loom	15.5	10
FSDB-NBH	2-1/8"	BX/MC,NM	NBH,16" TO 24"	(3)-1/2", (2)-Loom	21.5	10
FSB-OBH	1-1/2"	BX/MC,NM	OBH,16" TO 24"	(3)-1/2", (2)-Loom	15.5	10
FSDB-OBH	2-1/8"	BX/MC,NM	OBH,16" TO 24"	(3)-1/2", (2)-Loom	21.5	10
FS4PB	1/2"	-	-	(2)-1/2"	5.8	20
FS4PB-NBH	1/2"	-	NBH,16" TO 24"	(2)-1/2"	5.8	10

