

SPECIFICATION & FEATURES

DESCRIPTION:

Orbit Industries' 4-11/16" Square (5S) 1-Gang and 2-Gang Device Rings are used with 4-11/16" Square (5S) boxes to mount electrical fixtures, switches, and other devices. They are constructed from 16 gauge galvanized steel. Raised rings ranging from 1/4" to 2" accommodate drywall and added wall thicknesses. Orbit Industries' selection includes flat, drawn and tile rings with various types of slots for most devices.


CERTIFICATION:

UL file E227970, conforms to UL514A. acceptable for use in 2-hour fire rated walls.

FEATURES

- 000: Flat
- 025: Raised 1/4"
- 050: Raised 1/2"
- 058: Raised 5/8"
- 075: Raised 3/4"
- 100: Raised 1"
- 125: Raised 1-1/4"
- 150: Raised 1-1/2"
- 200: Raised 2"

4-11/16" SQUARE (5S) 1-GANG & 2-GANG DEVICE RINGS FLAT OR DRAWN

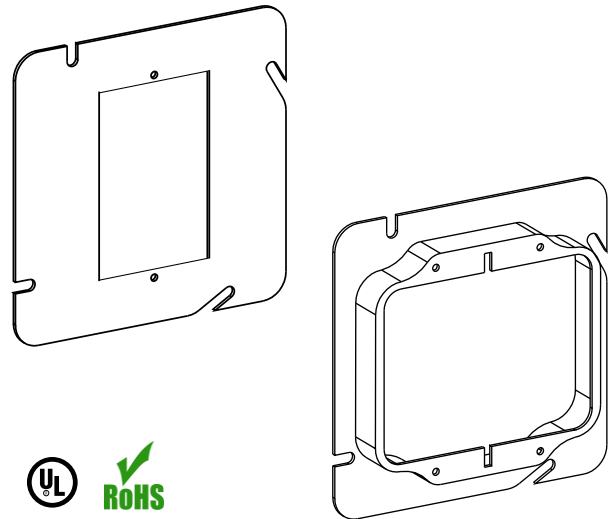

DIMENSIONS

Width: 4-11/16"

Height: 4-11/16"

CONFIGURATION DATA

Catalog No.	Description	Gangs	Cu.In	Std. Pkg.
51000	Flat	1	-	50
51025	Raised 1/4"	1	1.8	50
51050	Raised 1/2"	1	3.8	50
51058	Raised 5/8"	1	4.3	50
51075	Raised 3/4"	1	5.5	50
51100	Raised 1"	1	7.5	25
51125	Raised 1-1/4"	1	9.4	25
51150	Raised 1-1/2"	1	11.2	25
51200	Raised 2"	1	14.4	25
52000	Flat	2	-	50
52025	Raised 1/4"	2	3.0	50
52050	Raised 1/2"	2	5.8	50
52058	Raised 5/8"	2	7.5	50
52075	Raised 3/4"	2	8.8	50
52100	Raised 1"	2	11.8	25
52125	Raised 1-1/4"	2	14.5	25
52150	Raised 1-1/2"	2	15.5	25
52200	Raised 2"	2	20.7	25

