

4" OCTAGON (40) BOXES

DRAWN

1-1/2" DEEP

15.5 Cu. In.

NOTE

- For Fixture/Luminaire Support of 50 lbs or less

4" OCTAGON (40) BOXES & EXTENSION RINGS

WELDED

1-1/2" DEEP


15.5 Cu. In.

BAR HANGER FEATURES


- BHA:** Adjustable Bar Hanger allows installation of box anywhere along length of stud
- 4RB-50-BHA includes 3/8" - 18 NPS trade sized stud to accommodate fixture stem

NOTE


- For Fixture/Luminaire Support of 50 lbs or less
- *For Fixture/Luminaire Support of 50 lbs or less at 16 in. Span




4RB-50-LB



D4RB-50




D4RB-50/75




D4RB-75

Cat. No.	Features	Knockouts		Std. Pkg.
		Sides	Bottom	
D4RB-50	Drawn Box	4 - 1/2"	5 - 1/2"	50
D4RB-50/75	Drawn Box	2 - 1/2", 2 - 3/4"	3 - 1/2", 2 - 3/4"	50
D4RB-75	Drawn Box	4 - 3/4"	3 - 1/2", 2 - 3/4"	50


Cat. No.	Bracket & Setback	Knockouts		Std. Pkg.
		Sides	Bottom	
4RB-50	-	4 - 1/2"	5 - 1/2"	50
4RB-MKO	-	2 - 1/2", 2 - MKO	3 - 1/2", 2 - 3/4"	50
4RB-50-FB	FB, 1/2"	3 - 1/2"	5 - 1/2"	50
4RB-MKO-FB	FB, 1/2"	1 - 1/2", 2 - MKO	3 - 1/2", 2 - 3/4"	50
4RB-50-LB	LB, 1/2"	4 - 1/2"	5 - 1/2"	50
*4RB-50-BHA	BHA, 14-1/2" to 22-1/2"	4 - 1/2"	4 - 1/2"	25
4RB-50-EXT	-	4 - 1/2"	-	50
4RB-MKO-EXT	-	2 - 1/2", 2 - MKO	-	50




4RB-50




4RB-MKO




4RB-50-FB




4RB-MKO-FB

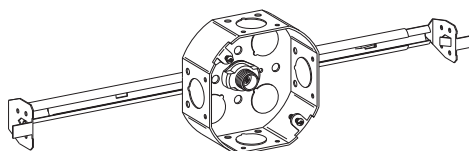

*4RB-50-BHA



4RB-50-EXT



4RB-MKO-EXT

4" OCTAGON (40) BOXES

WELDED

1-1/2" DEEP

15.5 Cu. In.


WITH NON-METALLIC (NM)

SHEATHED CABLE CLAMPS


NOTE

- For Fixture/Luminaire Support of 50 lbs or less (Except 4RB-NM-E and 4RB-NM-SG)
- *For Fixture/Luminaire Support of 50 lbs or less at 16 in. Span


Cat. No.	Bracket & Setback	Knockouts		Std. Pkg.
		Sides	Bottom	
4RB-NM	-	2 - 1/2", 4 - Loom	1 - 1/2"	50
4RB-NM-E	Ears	2 - 1/2", 4 - Loom	1 - 1/2"	50
4RB-NM-FB	FB, 1/2"	1 - 1/2", 4 - Loom	1 - 1/2"	50
4RB-NM-LB	LB, 1/2"	2 - 1/2", 4 - Loom	1 - 1/2"	50
4RB-NM-SG	Swing Bracket - Old Work	4 - Loom	1 - 1/2"	50
*4RB-NM-BHA	BHA, 14-1/2" to 22-1/2"	2 - 1/2", 4 - Loom	-	25




4RB-NM




4RB-NM-E




4RB-NM-FB



4RB-NM-LB



4RB-NM-SG

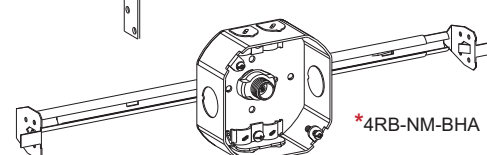

*4RB-NM-BHA

- 600V** MKO's and CKO's suitable for bonding without any additional bonding means up to 600V
- Visit www.ul.com or QCIT Guide on page W1 for more information