


PVC-Coated Conduit Bodies and Fittings

The ideal fitting for jacketed metal-clad cable in ordinary locations!

Ocal-Blue® Double-Coat STAR TECK EXTREME® STE Series Fittings for Ordinary Locations

- Provides a means for passing armored and metal-clad jacketed cables through a bulkhead or enclosure
- Forms a mechanical grip and water- and/or oil-resistant termination
- Provides grounding continuity of cable armor
- Removable armor stop accommodates a wide range of cable sizes
- Features built-in sealing device and jacket stripping gauge, elastomeric collar ring/bushing and grounding ring
- Aluminum construction
- Nominal .002" (2 mil) blue urethane coating on both interior and exterior
- Nominal .040" (40 mil) PVC coating bonded to exterior

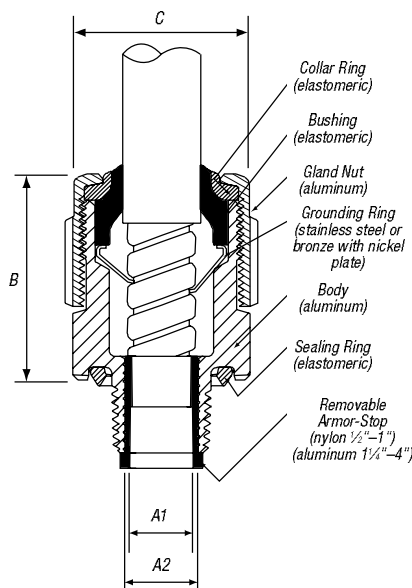

Cat. No.	Color
STE050-	
_ = space for color identifier	
G = Gray	
W = White	
B = Blue	
Custom colors also available.	



PVC-Coated STE Series Fittings for Ordinary Locations

CAT. NO.	HUB SIZE IN. METRIC SIZE DESIGNATOR**	STRIP LENGTH IN. MM	GLAND TORQUE LB.-IN. NM	RANGE OVER JACKET		RANGE OVER ARMOR		A1: THROAT DIA. MIN. W/END STOP IN. MM	A2: THROAT DIA. MIN. W/O END STOP IN. MM	B OVERALL HEIGHT IN. MM	C MAX. WIDTH IN. MM
				MIN. IN. MM	MAX. IN. MM	MIN. IN. MM	MAX. IN. MM				
ST050-462-*	1/2	1.25	300	.53	.65	.42	.57	N/A***	.40	2.02	1.22
	16	31.75	33.90	13.46	16.51	10.67	14.48	N/A***	10.16	51.31	30.99
STE050-*	1/2	1.25	300	.60	.99	.52	.90	.51	.61	2.65	1.63
	16	31.75	33.90	15.24	25.15	13.21	22.86	12.95	15.49	67.31	41.40
STE075-*	3/4	1.25	600	.86	1.21	.78	1.13	.66	.82	2.90	2.08
	21	31.75	67.79	21.84	30.73	19.81	28.70	16.76	20.83	73.66	52.83
STE100-*	1	1.25	700	.95	1.38	.87	1.30	.79	1.04	3.02	2.30
	27	31.75	79.09	24.13	35.05	22.10	33.02	20.07	26.42	76.71	58.42
STE125-*	1 1/4	1.25	1000	1.15	1.63	.99	1.47	.97	1.25	4.01	2.82
	35	31.75	112.98	29.21	41.40	25.15	37.34	24.64	31.75	101.85	71.63
STE150-*	1 1/2	1.75	1200	1.44	1.97	1.28	1.81	1.26	1.56	4.29	3.25
	41	44.45	135.58	36.58	50.04	32.51	45.97	32.00	39.62	108.97	82.55
STE200-*	2	1.75	1600	1.83	2.38	1.67	2.22	1.65	2.00	4.12	3.60
	53	44.45	180.78	46.48	60.45	42.42	56.39	41.91	50.80	104.65	91.44
STE250-	2 1/2	2.50	1600	2.27	2.81	2.11	2.68	2.08	2.42	5.32	4.75
	63	63.50	180.78	57.66	71.37	53.59	68.07	52.83	61.47	135.13	120.65
STE300-	3	2.50	1600	2.67	3.27	2.55	3.15	2.53	2.89	5.40	5.40
	78	63.50	180.78	67.82	83.06	64.77	80.01	64.26	73.41	137.16	137.16
STE350-	3 1/2	2.50	1600	3.22	3.87	3.09	3.64	3.07	3.46	5.36	5.90
	91	63.50	180.78	81.79	98.30	78.49	92.46	77.98	87.88	136.14	149.86
STE400-	4	2.50	1600	3.67	4.34	3.55	4.23	3.53	3.94	5.42	6.40
	103	63.50	180.78	93.22	110.27	90.17	107.44	89.66	100.08	137.67	162.56

*These products are UL Listed UL84H3 and watertight NEMA Type 6P.

**Metric size designator (ANSI C80.1-1994).

***This fitting does not have a removable armor stop.