

SPECIFICATION & FEATURES

DESCRIPTION:

Orbit Industries' grounding bushings insulated universal lay-in lug are used with locknut to terminate service conduit to cabinet. The lug provided for bonding jumper to neutral busbar. Plastic liner prevents damage to wire insulation, 105°C rated.

CERTIFICATION:

UL file E310659, Conforms to UL 514B


GROUND BUSHINGS INSULATED WITH UNIVERSAL LAY-IN LUG



FEATURES:

- Zinc Die Cast
- 105°C rated Throat Insulator

LINE DRAWINGS:

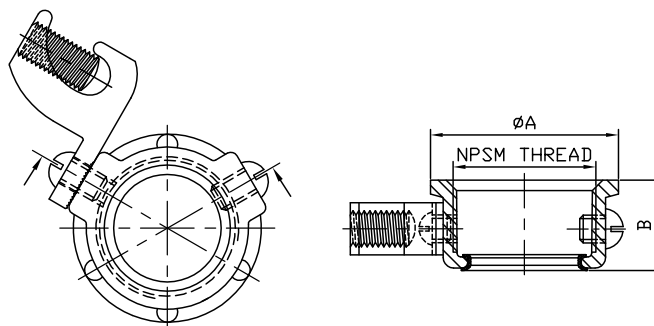

CONFIGURATION DATA:

Part No.	Trade Size	Lug Range	A (in)	B (in)	Screw Size	Std.Pkg.	Master Ctn.
GBLL-50	1/2"	#14 - #4	1.063	0.531	10-32 UNF X 0.28 RHFP	50	500
GBLL-75	3/4"	#14 - #4	1.280	0.531	10-32 UNF X 0.28 RHFP	40	400
GBLL-100	1"	#14 - #4	1.535	0.630	10-32 UNF X 0.28 RHFP	15	150
GBLL-125	1-1/4"	#14 - #4	1.870	0.650	10-32 UNF X 0.28 RHFP	15	150
GBLL-125-10	1-1/4"	#14 - #1/0	-	-	-	20	200
GBLL-150	1-1/2"	#14 - #4	2.165	0.689	10-32 UNF X 0.28 RHFP	10	100
GBLL-150-10	1-1/2"	#14 - #1/0	-	-	-	10	100
GBLL-200	2"	#14 - #4	2.657	0.689	10-32 UNF X 0.28 RHFP	5	50
GBLL-200-10	2"	#14 - #1/0	-	-	-	10	100
GBLL-250	2-1/2"	#6 - #250MCM	3.228	0.906	1/4"-20 UNC X 0.37 RHFP	5	50
GBLL-250-10	2-1/2"	#14 - #1/0	-	-	-	-	50
GBLL-300	3"	#6 - #250MCM	3.839	0.906	1/4"-20 UNC X 0.37 RHFP	5	50
GBLL-300-10	3"	#14 - #1/0	-	-	-	-	50
GBLL-350	3-1/2"	#6 - #250MCM	4.331	0.906	1/4"-20 UNC X 0.37 RHFP	4	40
GBLL-350-10	3-1/2"	#14 - #1/0	-	-	-	-	10
GBLL-400	4"	#6 - #250MCM	4.843	0.906	1/4"-20 UNC X 0.37 RHFP	4	40
GBLL-400-10	4"	#14 - #1/0	-	-	-	-	10

