

SPECIFICATION & FEATURES

DESCRIPTION:

Orbit Industries rain tight compression connectors are used in wet locations to bond EMT thinwall conduits to electrical junction boxes or enclosures. Orbit Industries' rain-tight EMT compression connectors have been designed to comply with the new rain-tight test requirements along with the 2008 NEC 358.42 and 314.15 requirements. The steel construction ensures mechanical protection and the conduit to the designated electrical junction box or enclosure. With Orbit Industries' labor saving design, electrician can quickly tighten these connectors on EMT conduits.

STEEL INSULATED EMT CONNECTORS RAIN-TIGHT (1/2" ~ 4")



CERTIFICATION:

UL file E310660, Conforms to UL 514B (1/2" ~ 2")
UL file E310658, Conforms to UL 514B (2-1/2" ~ 4")





FEATURES:

- Steel
- Electroplated Zinc
- Concrete-Tight
- Suitable for applications above 600V
- With Insulated Throat (Yellow, Throat color may vary)
- Compression Cap color may vary

LINE DRAWINGS:

1/2" ~ 4"

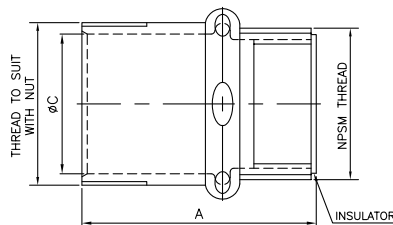

CONFIGURATION DATA:

Part No.	Trade Size	A (in)	B (in)	C (in)	Std.Pkg.	Master Ctn.
OF7601-SW	1/2"	1.417	0.965	0.732	25	250
OF7602-SW	3/4"	1.575	1.201	0.949	25	250
OF7603-SW	1"	1.850	1.465	1.189	10	100
OF7604-SW	1-1/4"	1.969	1.823	1.535	10	100
OF7605-SW	1-1/2"	2.244	2.075	1.768	10	50
OF7606-SW	2"	2.677	2.559	2.224	5	50
OF7607-SW	2-1/2"	3.346	3.327	2.921	-	12
OF7608-SW	3'	3.543	3.886	3.543	-	12
OF7609-SW	3-1/2"	3.898	4.37	4.047	-	6
OF7610-SW	4"	4.055	4.941	4.547	-	6

