


### Component Weight and Temperature Compatibility




DIN Rail Wiring Duct is designed for use up to but not exceeding the UL recognized continuous use temperature, **50°C (122°F)**. Prolonged exposure to higher temperatures is not recommended and can damage product.

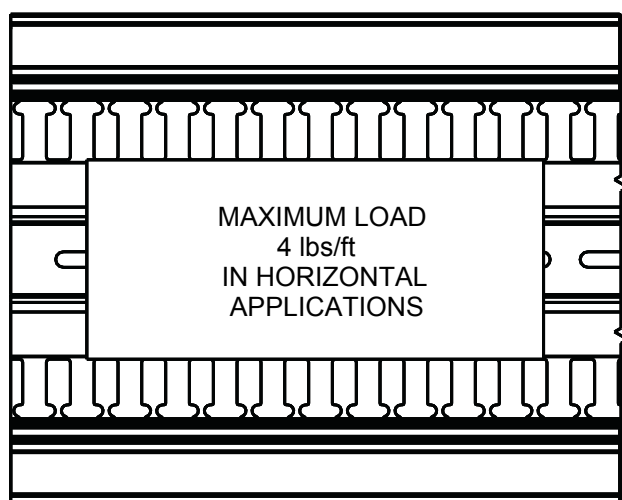


Do not mount heat-generating components such as drives or power supplies to DIN Rail Wiring Duct.

### Component Width Compatibility

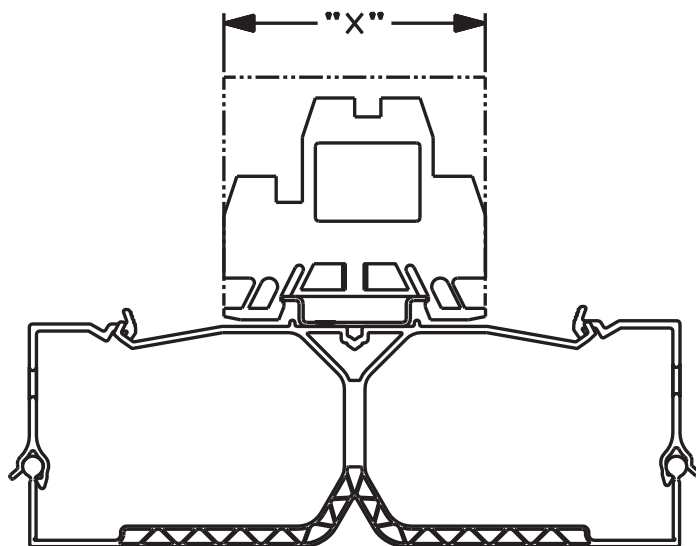


| DIN Rail Wiring Duct | Recommended Maximum Component Width "X" |
|----------------------|-----------------------------------------|
| DRD22**6             | 2 5/8"                                  |
| DRD33**6             | 2 5/8"                                  |
| DRD44**6             | 3 5/8"                                  |



Component use within recommended maximum width ensures top wire slots are fully accessible.

**DIN Rail Wiring Duct Installation and Fastener Spacing**


**NR1-C**  
(Sold Separately)



Optional: User Supplied  
#10-32x1/2" (or sheet  
metal screw equivalent)

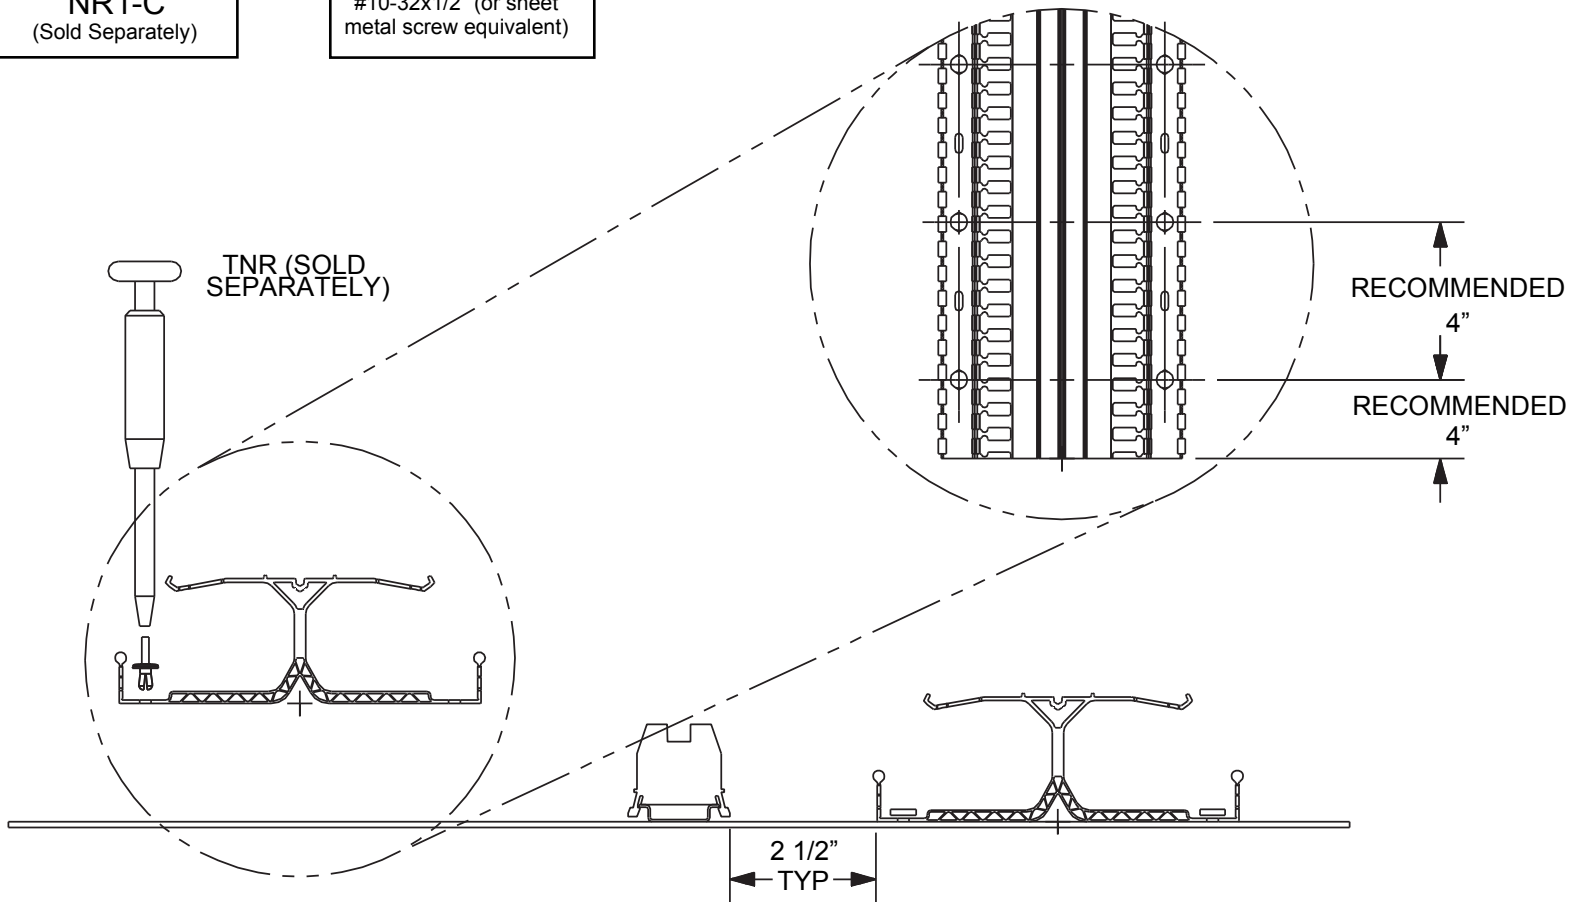**Cover Installation, Operation, and Removal**


**DRDC\*\*6**  
(supplied with base)

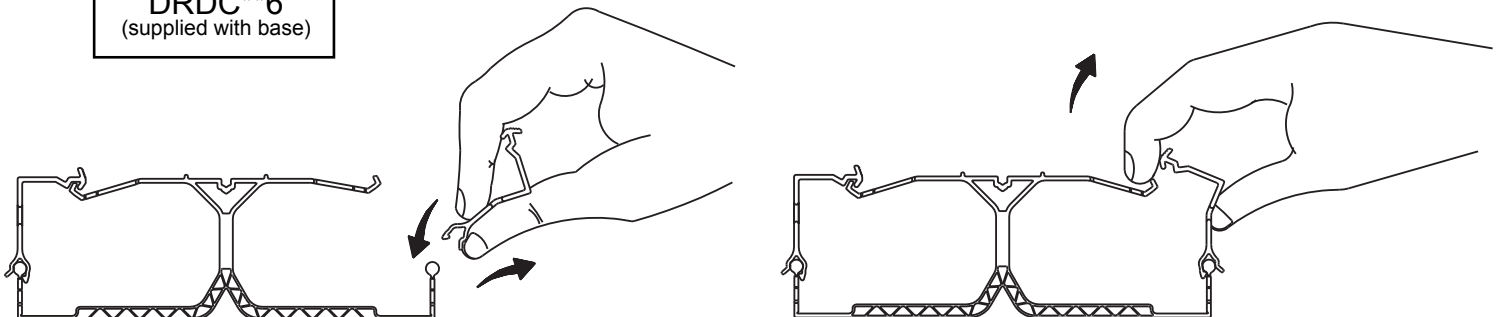

### Installing Rail to DIN Rail Wiring Duct



**DRDSF**  
#10-16 x 5/8"  
self-drilling fastener  
(supplied with base)




User supplied  
35x7.5mm or 15mm \*  
DIN rail


\* 15mm DIN rail must be installed with #8-18 x 5/8" self-drilling fastener, not included.

2" RECOMMENDED →


← 8" RECOMMENDED

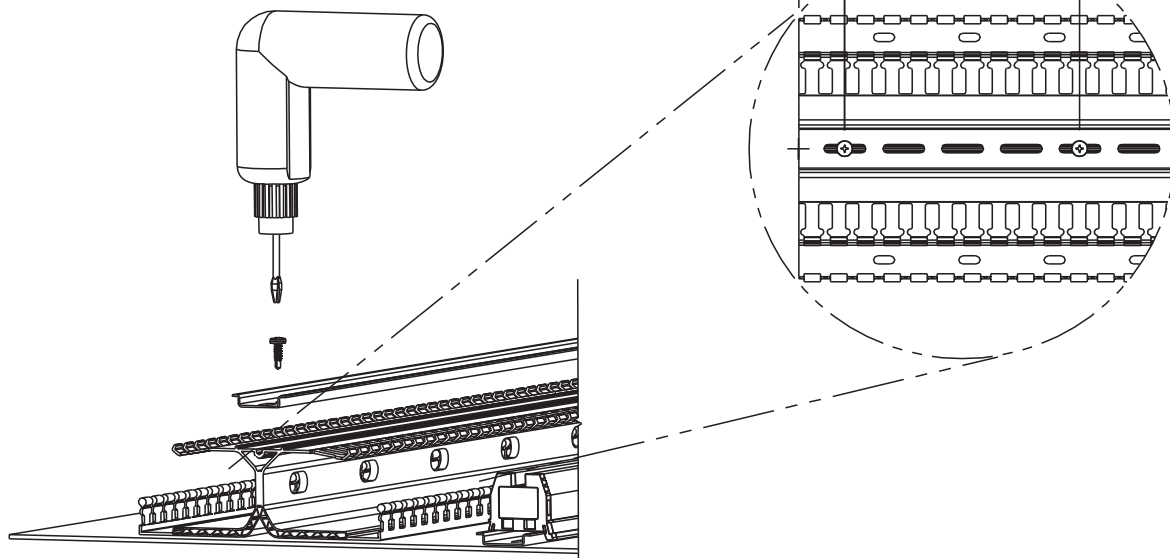







### Optional Wire Retainer





**DRDWR**  
(optional)

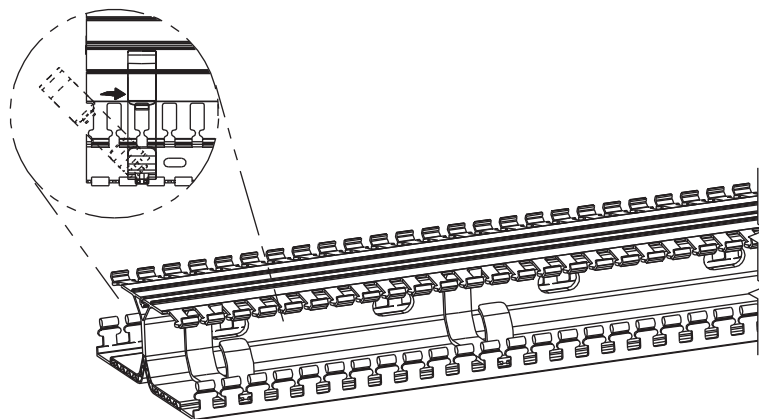

## Transitions to Conventional Wiring Duct and Optional Corner Strip

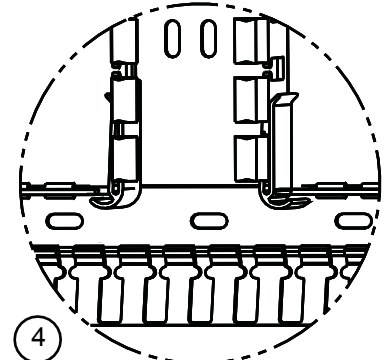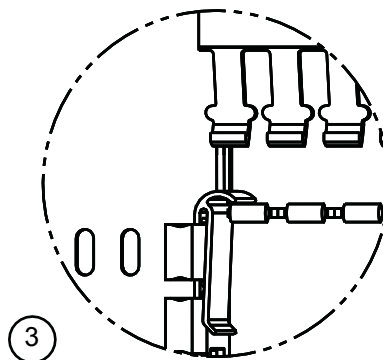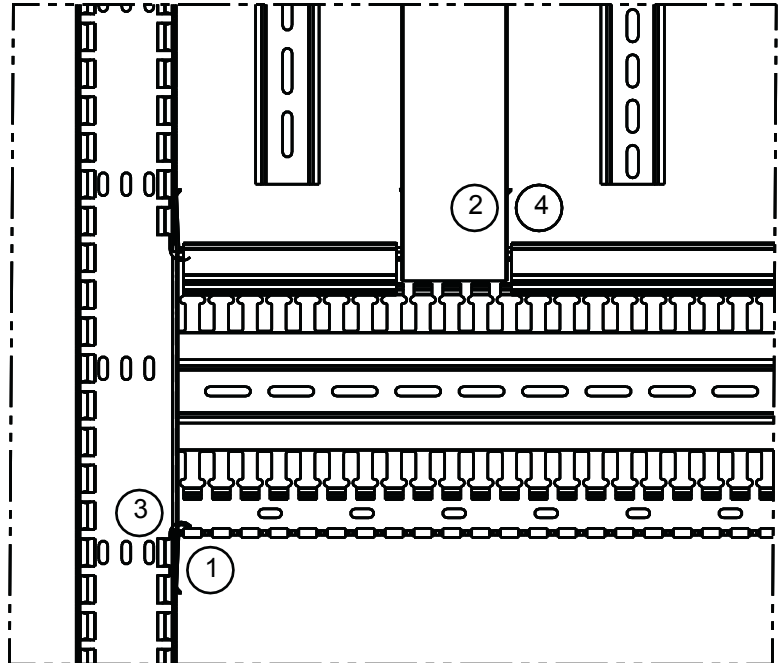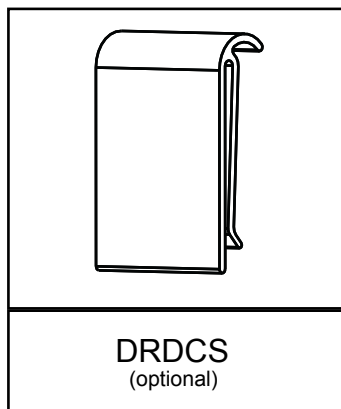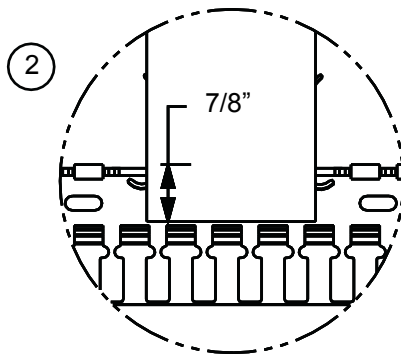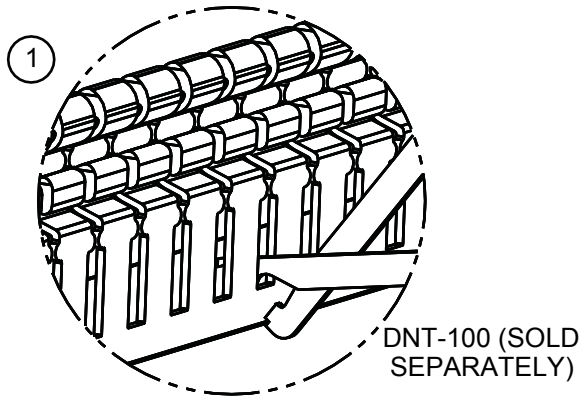

## Utilizing Pass Through Holes to Shorten Wiring Path

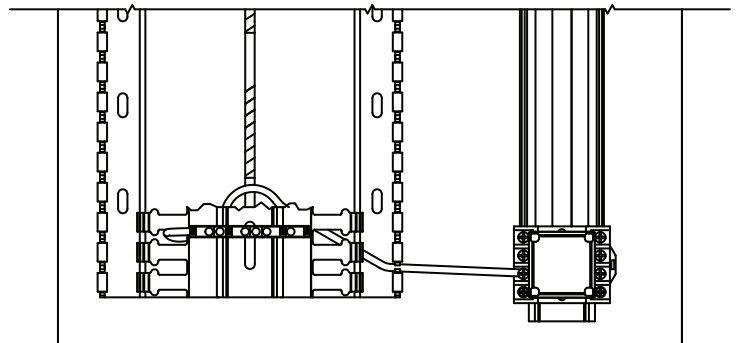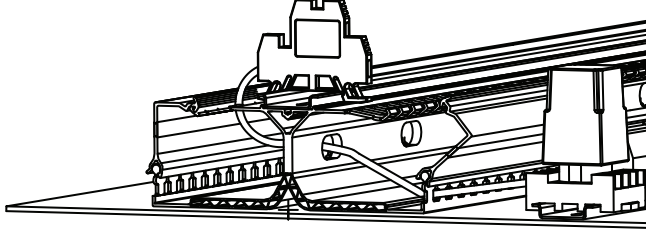

For Instructions in Local Languages  
and Technical Support:

[www.panduit.com/resources/install\\_maintain.asp](http://www.panduit.com/resources/install_maintain.asp)

**PANDUIT**  
[www.panduit.com](http://www.panduit.com)

E-mail:  
[techsupport@panduit.com](mailto:techsupport@panduit.com)

Fax:  
866-405-6654