




## PASS & SEYMOUR® Commercial Specification Grade Straight Blade Receptacles 15 & 20A, 125V

### CR15, CR20

#### The standard for commercial receptacles

Plated, corrosion-resistant straps, rugged nylon faces, and triple-wipe power contacts mean these receptacles will ensure consistent performance. Tri-drive, backed-out terminal screws save installation time.

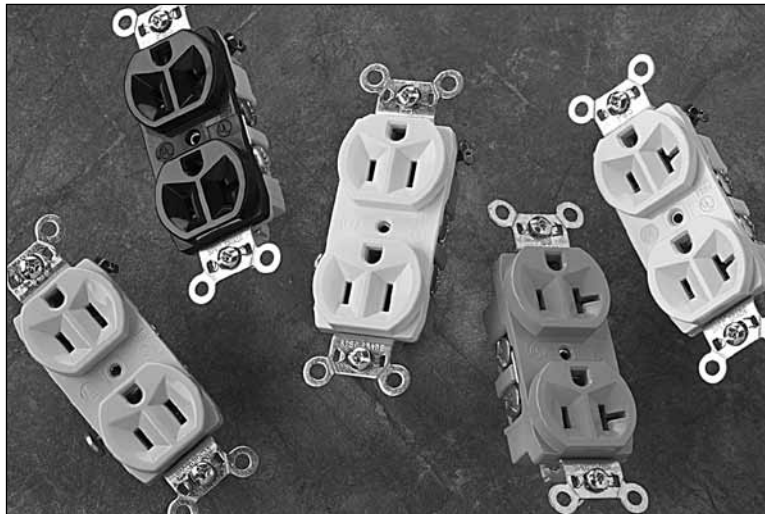

#### FEATURES & BENEFITS

**.032 inch thick, brass, triple-wipe power contacts** for lasting retention.


**Two drive screws anchor strap** to back body and face where abrupt removal torque is strongest.

**Corrosion-resistant, plated steel strap** locked in to face and back body to resist pulling away from face/body assembly.

**Auto-ground** eliminates the necessity to terminate grounding conductor to device.

**Easily accessed break-off, line-contact connecting tab** for fast, easy split-circuit wiring.

**Tri-drive steel terminal screws.** Side wire capability.

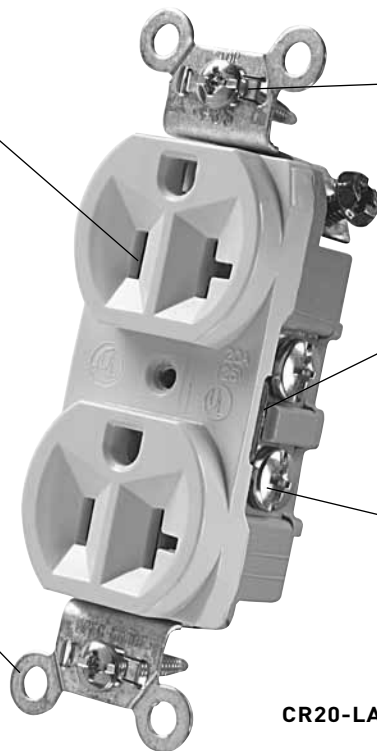

CR20-LA

#### FIELD USES/VERTICAL MARKETS

- Retail
- Office
- Hospitality/Lodging
- Multiple Dwelling


# PASS & SEYMOUR®

## Commercial Specification Grade

### Straight Blade Receptacles 15 & 20A, 125V

#### ORDERING INFORMATION

| Catalog Number                      | Rating<br>A | V   | Color        | NEMA<br>Configuration No. |
|-------------------------------------|-------------|-----|--------------|---------------------------|
| <b>Duplex Receptacles Side Wire</b> |             |     |              |                           |
| CR15-I                              | 15          | 125 | Ivory        | 5-15R                     |
| CR15-W                              | 15          | 125 | White        | 5-15R                     |
| CR15                                | 15          | 125 | Brown        | 5-15R                     |
| CR15-GRY                            | 15          | 125 | Gray         | 5-15R                     |
| CR15-LA                             | 15          | 125 | Light Almond | 5-15R                     |
| CR20-I                              | 20          | 125 | Ivory        | 5-20R                     |
| CR20-W                              | 20          | 125 | White        | 5-20R                     |
| CR20                                | 20          | 125 | Brown        | 5-20R                     |
| CR20-GRY                            | 20          | 125 | Gray         | 5-20R                     |
| CR20-BK                             | 20          | 125 | Black        | 5-20R                     |
| CR20-LA                             | 20          | 125 | Light Almond | 5-20R                     |



For more information on these and other P&S products refer to our Catalog or visit our web site.

# PASS & SEYMOUR®

## Commercial Specification Grade

### Straight Blade Receptacles 15 & 20A, 125V



#### TECHNICAL SPECIFICATIONS

##### 3rd Party Compliance

UL Listed, File Number E140596, Standard UL498.  
CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42.

##### Performance

###### Electrical


|                            |                                                       |
|----------------------------|-------------------------------------------------------|
| Dielectric Voltage         | Withstands 1500V minimum                              |
| Maximum Working Voltage    | 125V                                                  |
| Maximum Continuous Current | 15A – CR15; 20A – CR20                                |
| Temperature Rise           | Maximum 30°C after 50 cycles at 150% of rated current |

###### Mechanical

|                        |                                          |
|------------------------|------------------------------------------|
| Terminal Accommodation | #14 AWG - #10 AWG                        |
| Product Identification | Amperage, Voltage, 3rd Party Compliance. |

###### Environmental

|                       |                                                        |
|-----------------------|--------------------------------------------------------|
| Flammability          | UL94 V2                                                |
| Operating Temperature | Maximum continuous +50°C, minimum -40°C without impact |

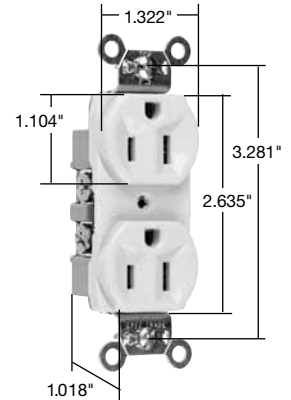

**Dimensions for  
15 & 20 Amp**

##### Materials

|                |                        |                      |                                                    |
|----------------|------------------------|----------------------|----------------------------------------------------|
| Face           | Nylon                  | Terminal Screws      | #8 Tri-Drive Steel (Neutral = Nickel Plated Steel) |
| Back Body      | PVC                    | Ground Screws        | #8 Hex Tri-Drive Steel                             |
| Line Contacts  | .032 260 Brass         | Assembly Drive Screw | Zinc-Plated Steel                                  |
| Mounting Strap | .042 Zinc-Plated Steel | Auto-Ground Clip     | Stainless Steel                                    |
| Ground Contact | .040 260 Brass         | Mounting Screws      | Tri-Drive Steel                                    |

##### Warranty

1 Year

For more information on these and other P&S products refer to our Catalog or visit our web site.

**SF304R1 — March 2014 — For latest specs visit [www.legrand.us/passandseymour](http://www.legrand.us/passandseymour)**

#### ALSO AVAILABLE...

- |                                 |                                      |                               |                               |
|---------------------------------|--------------------------------------|-------------------------------|-------------------------------|
| ■ GFCIs                         | ■ Ground Continuity Monitoring (GCM) | ■ Turnlok® Locking Devices    | ■ IEC 309 Industrial Products |
| ■ Hospital Grade Devices        | ■ Straight Blade Plugs & Connectors  | ■ Weatherproof Boxes & Covers | ■ Flexcor® Wire Mesh Grips    |
| ■ PlugTail™ Devices             | ■ USB Charging Devices               | ■ PlugTail™ Devices           | ■ Wall Plates                 |
| ■ SPD & Isolated Ground Devices |                                      |                               |                               |



#### Electrical Wiring Systems

P.O. Box 4822  
Syracuse, NY 13221-4822  
Phone: 1.800.776.4035  
[www.legrand.us/passandseymour](http://www.legrand.us/passandseymour)

570 Applewood Crescent  
Vaughan, Ontario L4K 4B4  
Phone: 905.738.9195  
[www.legrand.ca](http://www.legrand.ca)

