


STRAIGHT BLADE PLUGS & CONNECTORS

IP20
Suitability

Extra-Hard Use (EHU) Angled Devices 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

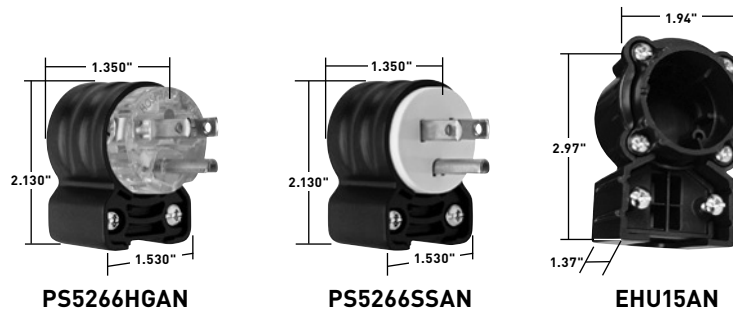


Features

- Angle plugs and adapters both allow for 4-position face rotation.
- Tri-drive assembly and cord-grip screws are standard on all angle adapters.
- Angle adapter (sold separately as catalog number EHU15AN) will accommodate all Pass & Seymour EHU-style Straight Blade plugs and connectors on a retrofit basis. Simply remove the straight handle body from the plug or connector face assembly, and replace with the angle adapter.


CATALOG NUMBER	RATING		DESCRIPTION	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
	A.	V.				 UL498	 FSUL WC596	 C22.2 No. 42
EHU – HOSPITAL GRADE								
PS5266HGAN	15	125	Plug, Black & Clear	.320"-.655"	5-15P	•	•	•
PS5366HGAN	20	125	Plug, Black & Clear	.320"-.655"	5-20P	•	•	•
PS5666HGAN	15	250	Plug, Black & Clear	.320"-.655"	6-15P	•	•	•
PS5466HGAN	20	250	Plug, Black & Clear	.320"-.655"	6-20P	•	•	•
EHU – SPECIFICATION GRADE								
PS5266SSAN	15	125	Plug, Black & White	.320"-.655"	5-15P	•	•	•
PS5366SSAN	20	125	Plug, Black & White	.320"-.655"	5-20P	•	•	•
PS5666SSAN	15	250	Plug, Black & White	.320"-.655"	6-15P	•	•	•
PS5466SSAN	20	250	Plug, Black & White	.320"-.655"	6-20P	•	•	•

CATALOG NUMBER	DESCRIPTION
ACCESSORIES	
EHU15AN	15 & 20A EHU Straight Blade, Right Angle Adapter

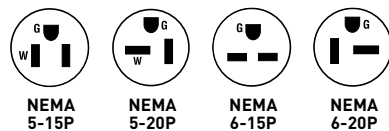


TECHNICAL SPECIFICATIONS

Straight Blade Connectors 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V



PS5269X



PS5269XHGM

Typical Specifications

Manufacturer's Identification: Pass & Seymour® PS5269X

Description: Straight Blade Connector, Power Supply

Type: 2 Pole, 3 Wire Grounding

Rating: 15A, 125V

Configuration: NEMA 5-15R

3rd Party Compliance: UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.

CATALOG NUMBER	RATING	NEMA CONFIG. NO.
☐ PS5269XHGM	15A 125V	5-15R
☐ PS5369XHGM	20A 125V	5-20R
☐ PS5669XHGM	15A 250V	6-15R
☐ PS5469XHGM	20A 250V	6-20R
☐ PS5269X	15A 125V	5-15R
☐ PS5269XGRY	15A 125V	5-15R

CATALOG NUMBER	RATING	NEMA CONFIG. NO.
☐ PS5269XBM	15A 125V	5-15R
☐ CR5269X	15A 125V	5-15R
☐ PS5369X	20A 125V	5-20R
☐ PS5669X	15A 250V	6-15R
☐ PS5469X	20A 250V	6-20R

NEMA CONFIG. NO.	AC HP RATING
STRAIGHT BLADE HORSEPOWER RATING FOR NEMA CONFIGURATION	
5-15	1/2
6-15	1 1/2*
7-15	2
5-20	1
6-20	2*
7-20	2
10-20	2 Line to Line* 1 Line to Neutral

* Suitable for 208V motor applications at the HP rating specified.

Performance

Electrical

Dielectric Withstand Voltage: 1500V minimum

Maximum Working Voltage: 250V

Current Interrupting: Certified for current interrupting at full-rated current

Temperature Rise: 30°C maximum after 50 cycles at 150% rated current

Mechanical

Cord Accommodation: Round portable service cords of diameters in accordance with the device rating as defined in UL62

Cord Grip Accommodation: .230"-.720" diameter

Terminal Identification: Green = Ground, White = Neutral, Brass = Hot

Terminal Accommodation: #18 AWG min. - #10 AWG max.

Product Identification: Amperage, Voltage, 3rd Party Compliance, NEMA Configuration

Environmental

Flammability: UL94 V2

Operating Temperature: Maximum continuous +75°C, minimum -40°C without impact

Materials

Terminal Clamp: Zinc-Plated Steel**

Terminal Screw: Nickel- or Brass-Plated Steel

Ground Screws: Nickel-Plated Steel

Cord Clamp Screws: Nickel-Plated Steel #8

Assembly Screws: Nickel-Plated Steel

Back Body: Nylon

Front Body: Nylon

Terminal Chamber: Polycarbonate

Cord Clamp: Nylon

Insert: Nylon

Contacts: Brass**

**Nickel-Plated for Corrosion-Resistant Product.


Consult Straight Blade Plugs & Connectors Section F for complete compliance listing.




NEMA 5-15R



NEMA 5-20R



NEMA 6-15R



NEMA 6-20R

Project
Location/Type