



INDUSTRIAL SPEC GRADE TURNLOK® LOCKING DEVICES


20 Amp NEMA L620 & L720 2 Pole, 3 Wire 20A, 250 & 277V




20A Receptacle



20A Connector





20A Plug




20A Flanged Inlet & Outlet

CATALOG NUMBER	RATING		DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
	A.	V.				 UL498	FSUL WC596	 CSA
RECEPTACLES								
L620R	20	250	Single Receptacle		L6-20R	•	•	•
L620RBL	20	250	Single Receptacle, Blue		L6-20R	•	•	•
L620RR	20	250	Single Receptacle, Red		L6-20R	•	•	•
IGL620R	20	250	Single Receptacle, Orange, Isolated Ground		L6-20R	•		•
L720R	20	277	Single Receptacle		L7-20R	•	•	•
IGL720R	20	277	Single Receptacle, Orange, Isolated Ground		L7-20R	•		•
CONNECTORS IP20 SUITABILITY								
L620C	20	250	Black Back, White Front Body	.225"-1.150"	L6-20R	•	•	•
L620CBK	20	250	Black Back, Black Front Body	.225"-1.150"	L6-20R	•	•	•
CRL620C	20	250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L6-20R	•	•	•
L720C	20	277	Black Back, White Front Body	.225"-1.150"	L7-20R	•	•	•
PLUGS IP20 SUITABILITY								
L620P	20	250	Black Back, White Front Body	.225"-1.150"	L6-20P	•	•	•
L620PBK	20	250	Black Back, Black Front Body	.225"-1.150"	L6-20P	•	•	•
CRL620P	20	250	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L6-20P	•	•	•
L720P	20	277	Black Back, White Front Body	.225"-1.150"	L7-20P	•	•	•
FLANGED INLETS & OUTLETS								
L620FI	20	250	Gray Inlet		L6-20P	•		•
L620FO	20	250	Gray Outlet		L6-20R	•		•
L720FI	20	277	Gray Inlet		L7-20P	•		•
L720FO	20	277	Gray Outlet		L7-20R	•		•



Reference Pages H-34 and H-35 for Accessories.

CATALOG NUMBER	DESCRIPTION	COLOR
WEATHERPROOF COVER		
WP62	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304 S/S
RECEPTACLE COVERS		
7425Y	20/30 Amp Receptacle Cover	Yellow
7425GRY	20/30 Amp Receptacle Cover	Gray



WP62

All devices listed on this page conform to NEMA WD-1 and WD-6.

TECHNICAL SPECIFICATIONS

20A Turnlok® Plugs

Typical Specifications

Manufacturer's Identification: Pass & Seymour® L520P

Description: Locking Plug, Power Supply


Type: 2 Pole, 3 Wire Grounding

Rating: 20A, 125V

Configuration: NEMA L5-20P

3rd Party Compliance: UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.

AMPS	CATALOG NUMBER	NEMA CONFIG. NO.	AMPS	CATALOG NUMBER	NEMA CONFIG. NO.
20	☐ L520P	L5-20P	20	☐ L1520P	L15-20P
20	☐ L520PBK	L5-20P	20	☐ L1520PBK	L15-20P
20	☐ CRL520P	L5-20P	20	☐ L1620P	L16-20P
20	☐ L620P	L6-20P	20	☐ L1820P	L18-20P
20	☐ CRL620P	L6-20P	20	☐ L1920P	L19-20P
20	☐ L720P	L7-20P	20	☐ L2020P	L20-20P
20	☐ L820P	L8-20P	20	☐ L2120P	L21-20P
20	☐ L920P	L9-20P	20	☐ L2220P	L22-20P
20	☐ L1020P	L10-20P	20	☐ L2320P	L23-20P
20	☐ L1120P	L11-20P	20	☐ L3720P	L24-20P
20	☐ L1220P	L12-20P	20	☐ 7311SS	Non-NEMA
20	☐ L1420P	L14-20P	20	☐ 7411SS	Non-NEMA
20	☐ CRL1420P	L14-20P			



20A Plug

Performance

Electrical

Dielectric Withstand Voltage: 2200V minimum

Maximum Working Voltage: 600VAC

Current Interrupting: Certified for current interrupting at full-rated current

Temperature Rise: 30°C maximum after 50 cycles at 150% rated current

Mechanical

Cord Accommodations: Round portable service cords of diameters in accordance with the device rating as defined in UL62

Cord Grip Accommodations: All are .225"–1.150" diameter

Terminal Identification: "GR" and Green Color = Ground, "WH" and

White Color = Neutral, "X", "Y", "Z" = Hot

Terminal Accommodation: #18 AWG min. – #8 AWG max.

Product Identification: Amperage, Voltage, 3rd Party Compliance, NEMA Configuration hot stamped onto device

Environmental


Flammability: UL94 V2

Operating Temperature: Maximum continuous +75°C, minimum -40°C without impact

Materials

	Standard	Corrosion-Resistant
Back Body:	Super Tough Nylon	Super Tough Nylon
Front Body:	Nylon	Nylon
Terminal Chamber:	Polycarbonate	Polycarbonate
Cord Clamp:	Nylon	Nylon
Insert:	Nylon	Nylon
Dust Cover:	Neoprene	Neoprene
Blades:	Brass	Nickel-Plated Brass
Terminal Clamp:	Nickel-Plated Steel	Nickel-Plated Steel
Terminal Screws:	Brass	Nickel-Plated Brass
Ground Screws:	Brass	Nickel-Plated Brass
Cord Clamp Screws:	Nickel-Plated Steel	Nickel-Plated Steel
Assembly Screws:	Nickel-Plated Steel	Nickel-Plated Steel

Consult Turnlok® Section G for complete compliance listing.

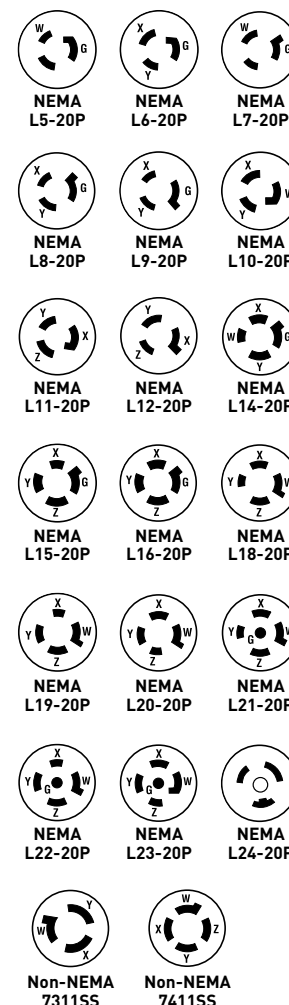

Project
Location/Type