



INDUSTRIAL SPEC GRADE TURNLOK® LOCKING DEVICES


20 Amp NEMA L520 2 Pole, 3 Wire 20A, 125V




20A Receptacle




20A Connector



20A Plug



20A Flanged Inlet & Outlet

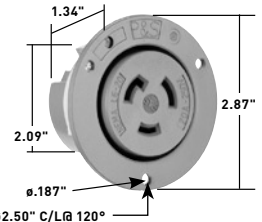

CATALOG NUMBER	RATING		DESCRIPTION/COLOR	CORD DIAMETER	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
	A.	V.				 UL498	FSUL WC596	 CSA
RECEPTACLES								
L520R	20	125	Single Receptacle		L5-20R	•	•	•
IGL520R	20	125	Single Receptacle, Orange, Isolated Ground		L5-20R	•		•
CRL520R	20	125	Single Receptacle, Yellow, Corrosion-Resistant		L5-20R	•	•	•
L520RBL	20	125	Single Receptacle, Blue		L5-20R	•	•	•
L520RR	20	125	Single Receptacle, Red		L5-20R	•	•	•
CONNECTORS IP20 SUITABILITY								
L520C	20	125	Black Back, White Front Body	.225"-1.150"	L5-20R	•	•	•
L520CBK	20	125	Black Back, Black Front Body	.225"-1.150"	L5-20R	•	•	•
CRL520C	20	125	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L5-20R	•	•	•
PLUGS IP20 SUITABILITY								
L520P	20	125	Black Back, White Front Body	.225"-1.150"	L5-20P	•	•	•
L520PBK	20	125	Black Back, Black Front Body	.225"-1.150"	L5-20P	•	•	•
IGL520P	20	125	Black Back, Orange Front Body, Isolated Ground	.225"-1.150"	L5-20P	•		•
CRL520P	20	125	Yellow Back, White Front Body, Corrosion-Resistant	.225"-1.150"	L5-20P	•	•	•
FLANGED INLETS & OUTLETS								
L520FI	20	125	Gray Inlet		L5-20P	•		•
L520FO	20	125	Gray Outlet		L5-20R	•		•

Reference Pages H-34 and H-35 for Accessories.


CATALOG NUMBER		COLOR
WEATHERPROOF COVER		
WPG2	Cover for 20 and 30A Turnlok Flanged Inlets and Outlets	Gray
STAINLESS STEEL WALL PLATE		
SS720	Wall Plate for Locking Receptacles	302/304
WEATHERPROOF BOOTS		
L2030RBC	Boot for 20/30A Locking Connector	Black
L2030RBP	Boot for 20/30A Locking Plug	Black
CORROSION-RESISTANT BOOTS		
CRL2030RBC	Boot for 20/30A Locking Connector	Yellow
CRL2030RBP	Boot for 20/30A Locking Plug	Yellow
RECEPTACLE COVERS		
7425Y	20/30A Receptacle Cover	Yellow
7425GRY	20/30A Receptacle Cover	Gray



SS720



7425GRY



NEMA L5-20P




NEMA L5-20R

All devices listed on this page conform to NEMA WD-1 and WD-6.

TECHNICAL SPECIFICATIONS

20A Turnlok® Receptacles



20A Receptacle

Typical Specifications

Manufacturer's Identification: Pass & Seymour® L520R

Description: Locking Receptacle, Power Supply

Type: 2 Pole, 3 Wire Grounding

Rating: 20A, 125V

Configuration: NEMA L5-20R

3rd Party Compliance: UL Listed, File Number E146159, Standard UL498, Attachment Plugs and Receptacles. Federal Specification WC596. CSA Certified, File Number LR1765, Standard CSA-C22.2 No. 42, General Use Receptacles and Attachment Plugs. Conforms to NEMA WD-1 and WD-6.

AMPS	CATALOG NUMBER	NEMA CONFIG. NO.	AMPS	CATALOG NUMBER	NEMA CONFIG. NO.
20	☐ L520R	L5-20R	20	☐ L1420R	L14-20R
20	☐ CRL520R	L5-20R	20	☐ L1520R	L15-20R
20	☐ L620R	L6-20R	20	☐ L1620R	L16-20R
20	☐ L720R	L7-20R	20	☐ L1820R	L18-20R
20	☐ L820R	L8-20R	20	☐ L1920R	L19-20R
20	☐ L920R	L9-20R	20	☐ L2020R	L20-20R
20	☐ L1020R	L10-20R	20	☐ L2120R	L21-20R
20	☐ L1120R	L11-20R	20	☐ L2220R	L22-20R
20	☐ L1220R	L12-20R	20	☐ L2320R	L23-20R

Performance

Electrical

Dielectric Withstand Voltage: 2000V minimum

Maximum Working Voltage: 600VAC

Current Interrupting: Certified for current interrupting at full-rated current

Temperature Rise: 30°C max. after 50 cycles at 150% rated current

Mechanical

Terminal Accommodation: #14 AWG min. – #10 AWG max.

Product Identification: Amperage, Voltage, NEMA Configuration molded into face

Environmental


Flammability: UL94 V2

Operating Temperature: Maximum continuous +75°C, minimum -40°C without impact

Materials

	Standard	Corrosion-Resistant
Front Body:	Nylon	Nylon
Back Body:	Nylon	Nylon
Mounting Strap:	Brass	Nickel-Plated Brass
Pressure Plate:	Brass	Nickel-Plated Brass
Contacts:	Brass	Nickel-Plated Brass
Terminal Clamps:	Brass	Nickel-Plated Brass
Terminal Screws:	Brass	Brass
Mounting Screws:	Zinc-Plated Steel	Stainless Steel

Consult Turnlok® Section G for complete compliance listing.

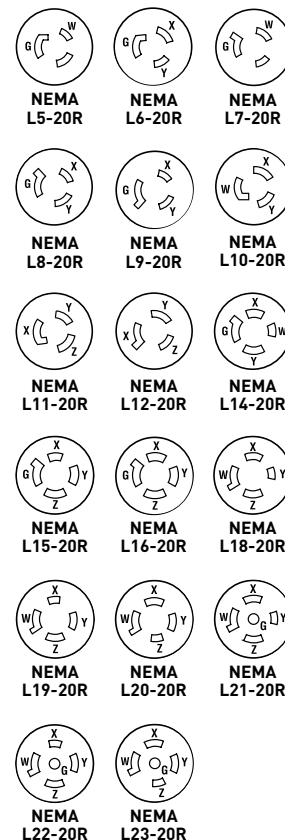

Project

Location/Type