

SLATER® PLASTIC BOXES

Old Work Boxes & Shallow Boxes


S352W

Old Work Switch & Outlet Box with Quick/Click®

- A. Quick/Click feature** secures devices quickly and easily. Does not strip when over-torqued. See Page M-20 for details.
- B. 4 Auto/Clamps® on each** end eliminate the need for separate cable clamps. See Page M-20 for details.
- C. Metal swing bracket** for quick mounting in existing walls.
- D. Divider plate** (LVDIV1, sold separately) used when installing line and low-voltage devices or multiple 277 volt devices in same box. See Page M-5 for details.
- E. Swing bracket** adjusts from 1-1/4" to 1/8".

Big 52 cubic inch capacity.

Easy installation, rectangular cutout.

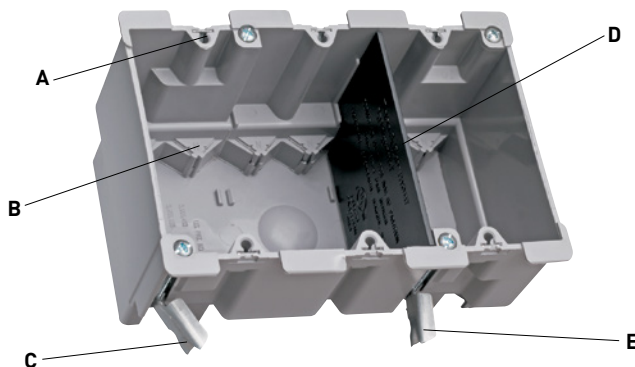

3 Gang Old Work Box shown with Divider Plate, LVDIV1



S118W



S122W



S232W



M118W



P108N



P108W

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS			WIRE FILL (AWG)	QTY. PER CARTON
			L	W	D		
OLD WORK SWITCH & OUTLET BOXES WITH QUICK/CLICK							
S116W	16.0	Single gang. Swing-bracket for mounting adjusts from 1¼" down to 1⁄8". 2 Auto/Clamps® each end.	3¾	2¼	2¾	8 No. 14 7 No. 12 6 No. 10	100
S118W	18.0	Single gang. Swing-bracket for mounting adjusts from 1¼" down to 1⁄8". 2 Auto/Clamps® each end.	3¾	2¼	3 ¹ / ₃₂	9 No. 14 8 No. 12 7 No. 10	100
S232W	32.0	Two gang. Swing-bracket for mounting adjusts from 1¼" down to 1⁄8". 4 Auto/Clamps® each end.	3¾	4 ¹ / ₁₆	3 ¹ / ₃₂	16 No. 14 14 No. 12 12 No. 10	50
S352W	52.0	Three gang. Swing-bracket for mounting adjusts from 1¼" down to 1⁄8". 6 Auto/Clamps® each end.	3¾	5 ⁷ / ₈	3 ¹ / ₃₂	26 No. 14 23 No. 12 20 No. 10	10
M118W NEW! P&S Exclusive	18.0	Single gang metal box. Swing bracket for mounting adjusts 1¼" down to 1⁄8". Four ¾"/1¼" KOs plus integral Romex clamp.	3¾	2¼	3	8 No. 14 7 No. 12 6 No. 10	50
DEEP OLD WORK SWITCH & OUTLET BOXES WITH QUICK/CLICK							
S122W	22.0	Single gang deep. Swing-bracket for mounting adjusts from 1¼" down to 1⁄8". 2 Auto/Clamps® each end.	3¾	2 ⁵ / ₁₆	3½	–	50
OLD WORK SWITCH & OUTLET BOXES WITH THREADED MOUNTING HOLES							
P116W	16.0	Single gang. Swing-bracket for mounting adjusts from 1¼" down to 1⁄8". 2 Auto/Clamps® each end.	3¾	2¼	2¾	8 No. 14 7 No. 12 6 No. 10	100
SHALLOW SWITCH & OUTLET BOXES for use in limited depth application							
P108W	8.0	Single gang. Old work flange box for retrofit applications.	3¾	2 ⁵ / ₁₆	1 ¹ / ₈	–	20
P108N	8.0	Single gang. With vertical side bracket for new construction applications.	3¾	2 ⁵ / ₁₆	1 ¹ / ₈	–	20

All boxes are UL listed.

UL Classified for 2 Hour Fire Resistance. (Does not apply to S232W, S352W, P108W, and P108N.)

All devices listed on this page conform to NEMA OS2.