



SLATER® PLASTIC BOXES

Wood & Steel Stud Bracket Boxes With Offset Bracket for Wood and/or Steel Mounting

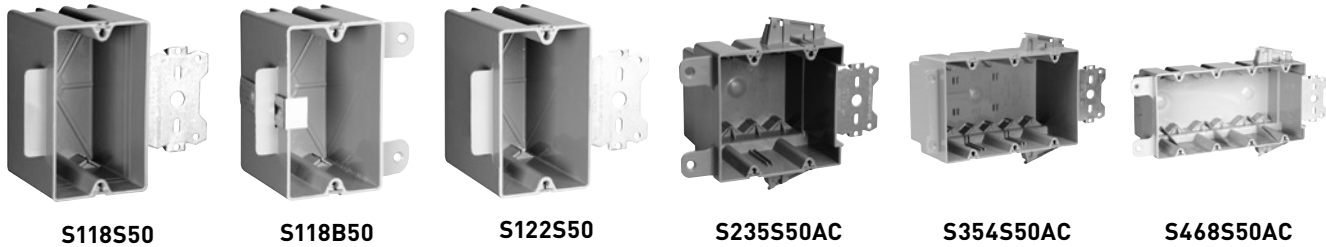

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS			WIRE FILL (AWG)	QTY. PER CARTON
			L	W	D		
WOOD & STEEL STUD BRACKET BOXES WITH QUICK/CLICK®							
S118S50	18.0	Single gang. 3⁄8" offset for wood and steel stud mounting. 2 Quick/Entries® each end. For use with 3⁄8" to 5⁄8" wallboard.	3¾	2¼	2 ²³ ⁄ ₃₂	9 No. 14 8 No. 12 7 No. 10	100
S118B50	18.0	Single gang. ½" offset for wood and steel stud mounting. Rear stabilizing bar virtually eliminates inward movement. 2 Quick/Entries® each end. For use with 3⁄8" to 5⁄8" wallboard.	3¾	2¼	2¾	9 No. 14 8 No. 12 7 No. 10	100
S235S50AC	35.0	Two gang. 3⁄8" offset for wood and steel stud mounting. 4 Auto/Clamps® each end. For use with 3⁄8" to 5⁄8" wallboard.	3 ³¹ ⁄ ₃₂	3 ³¹ ⁄ ₃₂	3 ³ ⁄ ₈	17 No. 14 15 No. 12 14 No. 10	50
S354S50AC	54.0	Three gang. 3⁄8" offset for wood and steel stud mounting. 6 Auto/Clamps® each end. For use with 3⁄8" to 5⁄8" wallboard.	3¾	5 ²⁵ ⁄ ₃₂	3	27 No. 14 24 No. 12 21 No. 10	25
S468S50AC	68.0	Four gang. 3⁄8" offset for wood and steel stud mounting. Rear stabilizing bar virtually eliminates inward movement. 6 Auto/Clamps® each end. For use with 3⁄8" to 5⁄8" wallboard.	3¾	7 ¹³ ⁄ ₁₆	3	34 No. 14 30 No. 12 27 No. 10	25
DEEP WOOD & STEEL STUD BRACKET BOXES WITH QUICK/CLICK®							
S122S50	22.5	Single gang deep. 3⁄8" offset for wood and steel stud mounting. 2 Quick/Entries® each end. For use with 3⁄8" to 5⁄8" wallboard.	3¾	2¼	3 ³ ⁄ ₈	11 No. 14 10 No. 12 9 No. 10	100

All boxes are UL Listed.
UL Classified for 2 Hour Fire Resistance. (Does not apply to S468S50AC.)

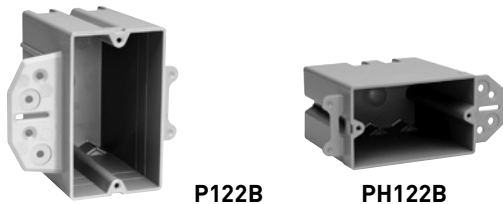

CATALOG NUMBER	CU. IN. VOL.	DESCRIPTION	DIMENSIONS			WIRE FILL (AWG)	QTY. PER CARTON
			L	W	D		
STEEL STUD BRACKET BOXES WITH QUICK/CLICK®							
S122B	22.0	Single gang. 1/2" offset for steel stud mount only. 2 stabilizer legs.	3¾	2¼	4¼	11 No. 14 10 No. 12 9 No. 10	100
SH122B	22.0	Single gang. Horizontal. 1/2" offset for wood or steel stud mount. 2 stabilizer legs.	3¾	2¼	3⅝	11 No. 14 10 No. 12 9 No. 10	100
STEEL STUD BRACKET BOXES							
P122B	22.0	Single gang. 1/2" offset for steel stud mount only. 2 stabilizer legs.	3¾	2¼	4¼	11 No. 14 10 No. 12 9 No. 10	100
PH122B	22.0	Single gang. Horizontal. 1/2" offset for wood or steel stud mount. 2 stabilizer legs.	3¾	2¼	3⅝	11 No. 14 10 No. 12 9 No. 10	100
S50BRACKET	N/A	Steel stud bracket only for use with P235RAC, P354RAC. S235RAC. S354RAC. S468RAC	N/A	N/A	N/A	N/A	50

All boxes are UL Listed. UL Classified for 2 Hour Fire Resistance.

All devices listed on this page conform to NEMA OS2.