



Double Ended Linear

Double Ended Linear 500T3Q/CL120V 12PK

High-quality white light with superior lumen performanceHalogen Double Ended lamps provide bright,white light for work lights and security lighting. Rugged construction for busy work sites. Offered in several lengths to meet most application needs.High lumen output provides light where you need it.


Product data

General Information	
Cap-Base	R7S [R7s]
Operating Position	Universal [Universal]
Nominal Lifetime (Nom)	2000 h
Light Technical	
Initial lumen (Nom)	9500 lm
Correlated Color Temperature (Nom)	2900 K
Luminous Efficacy (rated) (Nom)	19.0 lm/W
Color Rendering Index (Nom)	100
Operating and Electrical	
Power (Rated) (Nom)	500 W
Lamp Current (Nom)	4.17 A
Starting Time (Nom)	0.0 s
Voltage (Nom)	120 V
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear (CL)

Approval and Application	
Energy Efficiency Label (EEL)	D
Luminaire Design Requirements	
Bulb Temperature (Max)	900 °C
Pinch Temperature (Max)	350 °C
Product Data	
Order product name	Double Ended Linear PLUS PRO S 500W R7s 120V 1CT/12
EAN/UPC - Product	046677100100
Order code	200105
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	924735334593
Net Weight (Piece)	0.010 kg

Double Ended Linear

Dimensional drawing

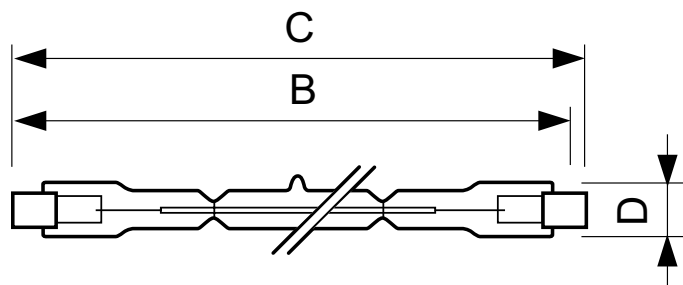

Product	D	B	B	B	C
Double Ended Linear PLUS PRO S	12 mm	115.8 mm	114.2 mm	112.6 mm	117.6 mm
500W R7s 120V 1CT/12					

DESmall 500W R7s 120V

