



Preheat T8

F15T8/D 25PK

Philips leads the industry with the lowest level mercury technology. Reducing the mercury level (source reduction) during the manufacturing phase is essential to creating products that are less harmful to the environment.


Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life To 10% Failures (Nom)	10000 h
Life To 50% Failures (Nom)	13000 h
Features	ALTO® (ALTO)
Light Technical	
Color Code	54-765
Initial lumen (Nom)	725 lm
Color Designation	Cool Daylight
Lumen Maintenance 10000 h (Nom)	75 %
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 5000 h (Nom)	80 %
Chromaticity Coordinate X (Nom)	313
Chromaticity Coordinate Y (Nom)	337
Correlated Color Temperature (Nom)	6200 K
Color Rendering Index (Nom)	75
Operating and Electrical	
Power (Rated) (Nom)	15.5 W
Lamp Current (Nom)	0.335 A

Voltage (Nom)	55 V
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	Green [Green Cap]
Approval and Application	
Mercury (Hg) Content (Nom)	2.0 mg
Product Data	
Order product name	F15T8/D 25PK
EAN/UPC - Product	046677378233
Order code	407205
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928022805425
Net Weight (Piece)	59.600 g

Preheat T8

Dimensional drawing

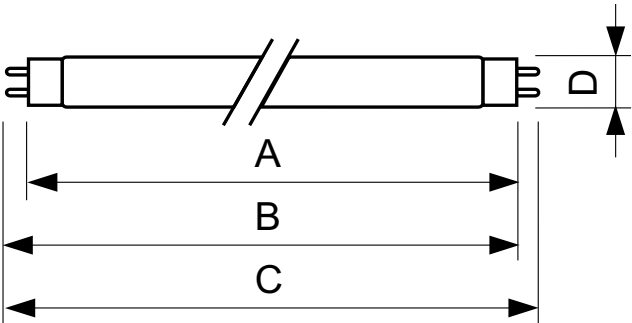

TL-D F15T8 Cool Daylight/GC ALTO

Product	D	A	B	B	C
F15T8/D 25PK	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

Photometric data

