



Double Ended Linear

Double Ended Linear BC250T3Q/CL 120V 12/1PK

High-quality white light with superior lumen performanceHalogen Double Ended lamps provide bright,white light for work lights and security lighting. Rugged construction for busy work sites. Offered in several lengths to meet most application needs.High lumen output provides light where you need it.


Product data

General Information	
Cap-Base	R7S [R7s]
Nominal Lifetime (Nom)	2000 h
Light Technical	
Initial lumen (Nom)	4000 lm
Correlated Color Temperature (Nom)	2900 K
Luminous Efficacy (rated) (Nom)	16 lm/W
Color Rendering Index (Nom)	100
Operating and Electrical	
Power (Rated) (Nom)	250 W
Lamp Current (Nom)	2.08 A
Starting Time (Nom)	0.0 s
Voltage (Nom)	120 V
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear (CL)

Cap-Base Information	na [-]
Approval and Application	
Energy Efficiency Label (EEL)	E
Luminaire Design Requirements	
Bulb Temperature (Max)	900 °C
Pinch Temperature (Max)	350 °C
Product Data	
Order product name	Double Ended Linear BC250T3Q/CL 120V 12/1PK
EAN/UPC - Product	046677415624
Order code	415620
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	924884736301
Net Weight (Piece)	0.006 kg

Double Ended Linear

Dimensional drawing

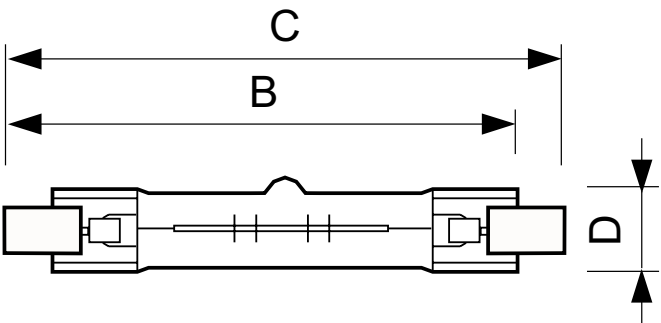

Product	D (max)	B (max)	B	B (min)	C (max)
Double Ended Linear	12 mm	76.5 mm	74.9 mm	73.3 mm	78.3 mm
BC250T3Q/CL 120V 12/1PK					

DEComp 250W R7s 120V T3 CL

