


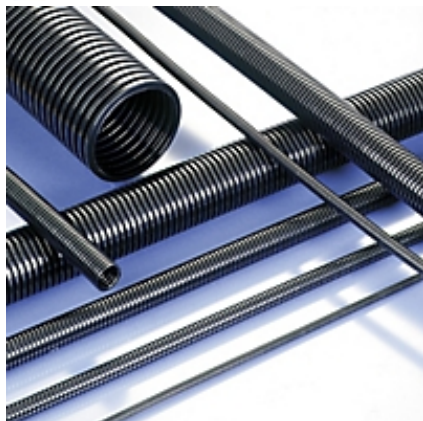

Family

**Catalog Number:** PUET-36B.30  
**Product ID:** 7TAA292900R0006  
**UPC Number:** 78620996880  
**EAN Number:** 07630030264191  
**Status:** Active

Highly Flexible, Medium Wall Black Conduit, (PUE) Material - Polyurethane, Conduit Size NW - 36, 30 Meters

- Highest flexibility
- Excellent chafing characteristics
- Free from halogens and cadmium
- For dynamic applications in robotics and automation

#### North American Specifications (UNSPSC)

|                  |                             |
|------------------|-----------------------------|
| UNSPSC           | 39131706 Electrical conduit |
| IGCC             | 5535 Electrical conduit     |
| Brand Name       | PMA                         |
| Type             | Medium Wall Conduit         |
| Application      | Robotic                     |
| Trade Size       | NW36                        |
| Outside Diameter | 1.67 Inch                   |
| Length           | 30 m                        |
| Flexibility      | Very Flexible               |
| Material         | Polyurethane                |
| Color            | Black                       |

#### European Specifications (ETIM)

|                                            |                                  |
|--------------------------------------------|----------------------------------|
| ETIM                                       | EC001175 Corrugated plastic hose |
| Nominal diameter                           | 40mm                             |
| Outer diameter                             | 42.4mm                           |
| Inner diameter                             | 35.8mm                           |
| Material                                   | Other                            |
| Compressive strength                       | 70N                              |
| Operating temperature                      | -60 - +50°C                      |
| Fire resistance in accordance with UL94    | HB                               |
| UV resistant                               | Y                                |
| Oil resistant                              | Y                                |
| Colour                                     | Black                            |
| Sheathing material                         | Not sheathed                     |
| Bending strength                           | Flexible                         |
| Lengthwise slotted                         | N                                |
| Closable (two-part)                        | N                                |
| Halogen free                               | Y                                |
| Approved according to DIN EN 61386-23      | N                                |
| Approved according to UR                   | N                                |
| Approved according to CSA                  | N                                |
| Approved according to LUL/British Standard | N                                |
| Approved according to Lloyd's Register TA  | N                                |
| Approved according to UTAC                 | N                                |
| Approved according to DIN 5510             | N                                |
| Approved according to NF F 16-101          | N                                |

#### Packaging

|                |   |
|----------------|---|
| Inner Quantity | 1 |
|----------------|---|

|                           |                      |
|---------------------------|----------------------|
| Outer Quantity            | 1                    |
| Outer Dimensions (inches) | 30.709x30.709x10.236 |
| Weight Uom                | 0.01 lbs. Each       |

#### Documents / Support Tools

Technical Drawing / Data Sheet Canada   Available on Website

#### For further technical assistance, please contact us...

Thomas & Betts - USA  
860 Ridge Lake Blvd.  
Memphis, TN 38120  
[www.tnb.com](http://www.tnb.com)

T&B Technical Support  
MS 3B-50  
860 Ridge Lake Blvd.  
Memphis, TN 38120

Hours: 7AM - 6PM CDT  
Monday-Friday  
Phone: (888) 862-3289  
Fax: (901) 252-1321  
Email: [techsupport@tnb.com](mailto:techsupport@tnb.com)