



65w
BR30 Replacement
● ● ● ●




50w
R20 Replacement
● ● ● ●



75w
BR40 Replacement
● ●

85w
BR40 Replacement
● ● ● ●

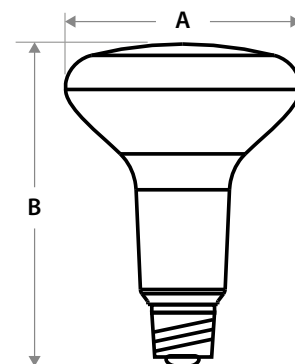

DIMENSIONS	A	B
R20 - 50W	2 ½	3 ¾
BR30 - 65W	3 ¾	5 ⅛
BR40 - 75W	5	6 ¼
BR40 - 85W	5	6 ¼

Measurements in inches

	Shape	Lamp Power	Wattage EQ	Base	CRI	Color Temp.	Dimmable	Light Dist.	Lifespan (hrs)	Lumens	Efficacy	Energy Star	Case
RAB Catalog #		W	=		80 ⁺								Qty

R20

	R20-7-827-DIM	R20	7	50W	E26	80	2700	Y	110°	25k	525	75	•	10	
	R20-7-830-DIM						3000				525	75			
	R20-7-840-DIM						4000				525	75			
	R20-7-850-DIM						5000				525	75			

BR30

	BR30-9-827-DIM	BR30	9.5	65W	E26	80	2700	Y	110°	25k	680	72	•	6	
	BR30-9-830-DIM						3000				680	72			
	BR30-9-840-DIM						4000				720	76			
	BR30-9-850-DIM						5000				720	76			

BR40

	BR40-13-827-DIM	BR40	13	75W	E26	80	2700	Y	110°	25k	950	73	•	6
	BR40-13-830-DIM						3000				950	73		
	BR40-15-827-DIM	BR40	15	85W	E26	80	2700	Y	110°	25k	1100	73	•	6
	BR40-15-830-DIM						3000				1100	73		
	BR40-15-840-DIM						4000				1100	73		
	BR40-15-850-DIM						5000				1100	73		

REFLECTORS | Dimmable



Replacements for R and BR lamps with a wide light distribution.

Dimmable LED with a 25,000-hour lifespan. Premium models offer 90 CRI.

Applications

Healthcare

Hospitality

Office

Residential

Retail

Key Features



ENERGY SAVINGS

Save up to 85% on energy.



25,000-HOUR LIFESPAN

Long-life product.



DAMP RATED

Suitable for damp locations.



ENCLOSED FIXTURE RATED

May be used in both enclosed and open fixtures.



DIMMABLE

Compatible with 120V dimming systems.




SHATTERPROOF


Plastic constructed bulbs ideal for rugged applications.

120V Dimming

On most common dimmers¹



Applications



CRI90⁺
TRUE COLORS



CRI 80⁺



1. Check dimmer compatibility list

RAB LAMPS | Case Details

	Lamp Shape	Catalog #	Case Qty	Case Length Inches	Case Width Inches	Case Height Inches	Pallet Qty (Case)	Pallet Qty (Lamps)	Pallet Length Inches	Pallet Width Inches	Pallet Height Inches
A-Line Bulbs 	A19 E26 & GU24 base	A19-6-E26-8XX-ND	12	100.00	7.56	5.12	120	1440	46.93	41.57	26.22
		A19-9-E26-8XX-ND									
		A19-12-E26-8XX-ND									
		A19-8.5-E26-8XX-ND 120-277V									
		A19-5-E26-8XX-DIM	12	15.40	5.20	4.90	168	2016	47.24	39.37	45.67
		A19-10-E26-8XX-DIM									
		A19-9-GU24-8XX-DIM									
		A19-13-E26-8XX-DIM									
		A19-13-GU24-8XX-DIM									
		A19-15-E26-8XX-DIM									
		A19-16-GU24-8XX-DIM									
		A19-6-E26-9XX-DIM	12	100.00	7.56	5.12	216	2592	45.35	400.00	466.00
	A19-9-E26-9XX-DIM	12	100.00	7.56	5.24	216	2592	45.35	400.00	47.13	
	A21	A21-16-E26-8XX-ND	12	12.83	9.69	6.18	105	1260	500.00	40.31	43.90
		A21-17-E26-8XX-ND 120-277V	12	17.52	5.91	6.10	98	1176	44.69	36.22	45.47
		A21-15-E26-9XX-DIM	12	13.62	10.28	6.22	80	960	41.10	34.17	49.76
		A21-17-E26-9XX-DIM									
A23 E26 & EX39	A23-24-E26-8XX-ND 120-277V	12	14.37	10.83	7.48	72	864	44.69	36.22	47.25	
	A23-24-EX39-8XX-ND 120-277V										
PS25 E26 & EX39	PS25-32-E26-8XX-ND 120-277V	12	14.37	10.83	8.27	60	720	44.69	36.22	47.25	
	PS25-32-EX39-8XX-ND 120-277V										
Reflectors 	R20	R20-7-8XX-DIM	10	13.19	5.51	4.41	200	2000	46.26	39.57	35.28
		R20-7-9XX-DIM									
	BR30	BR30-9-8XX-DIM	6	11.97	7.99	6.50	120	720	47.87	39.96	38.98
		BR30-10-9XX-DIM									
	BR40	BR40-13-8XX-DIM	6	15.75	10.63	6.97	60	360	47.24	371.00	41.81
		BR40-15-8XX-DIM									
		BR40-11-9XX-DIM	6	15.71	10.59	7.24	49	294	47.13	36.89	50.71
PARs 	PAR20	PAR20-7-8XX-40D-DIM	12	10.79	8.15	4.25	216	2592	43.15	37.87	512.00
		PAR20-7-9XX-25D-DIM	12	10.79	8.15	46.00	216	2592	43.15	37.87	48.66
		PAR20-7-9XX-40D-DIM									
	PAR30 Short/Long	PAR30S-11-8XX-40D-DIM	12	16.14	12.17	4.37	88	1056	44.45	36.50	47.68
		PAR30L-11-8XX-40D-DIM	12	16.14	12.17	5.67	72	864	44.45	36.50	512.00
		PAR30S-11-9XX-25D-DIM	6	12.80	8.46	4.72	140	840	46.65	38.39	37.80
		PAR30S-11-9XX-40D-DIM									
		PAR30L-11-9XX-25D-DIM	6	12.40	8.27	79.00	100	600	45.47	37.20	35.43
		PAR30L-11-9XX-35D-DIM									
	PAR38	PAR38-26-9XX-25D-ND	6	15.35	10.35	6.54	80	480	47.64	37.64	508.00
		PAR38-26-9XX-40D-ND									
		PAR38-15-8XX-40D-DIM	6	15.12	10.20	66.00	80	480	45.35	35.51	48.50
		PAR38-15-8XX-25D-DIM									
		PAR38-12-9XX-25D-DIM	6	14.88	104.00	6.18	88	528	44.65	39.80	49.45
PAR38-12-9XX-40D-DIM											
PAR38-16-9XX-25D-DIM											
PAR38-16-9XX-40D-DIM											