

Project:

Type:

Prepared By:

Date:



UPC: 019813832906



Features and Benefits

HID REPLACEMENT - Replace conventional HID lamps

BALLAST BYPASS - Internal driver eliminates the need for external driver or ballast

COMPACT DESIGN - Allows the lamp to fit in most fixtures

INSTALLATION ORIENTATION - Lamps can be installed universally: base up, down or sideways

HEAT DISSIPATION - Thermal technology extends lifespan

WATER & DUST RESISTANT - Ideal for outdoor fixtures

ENCLOSED FIXTURE RATED - May be used in enclosed and open fixtures

ENERGY SAVINGS - Uses 76% less energy than traditional lamps

MERCURY FREE - Environmentally friendly vs fluorescent technologies

350° ROTABLE BASE - Direct light where needed

Technical Specifications

Product Type	HID
Bulb Shape	Wall Pack
Wattage	40W
Wattage Equivalency	200W HID
Typical Lumen Output	6200
Efficacy	155 lm/W
Color Temperature	5000K Daylight
CRI	80
Base Type	E26
L70 Lifespan	50,000 hours
Operating Temperature	-30°C - 60°C
Dimmable	No
Beam Angle	180°
Warranty	5-Year, No-Compromise Warranty
Installation Type	Type B, Ballast Bypass
Installation Orientation	Universal Installation
For Use in Emergency Fixtures	No
For Use Outdoors in Open Fixtures	No

Electrical Characteristics

Input Voltage	100-277V
Power Factor	>0.9
Operating Frequency	50 / 60 Hz
Input Current @ 120V	0.4mA
Flicker	<30%
THDi	<20%

Listings

UL Listed	Yes
UL Classified	Yes
DLC Product Code	NO DLC CATEGORY
CEC Status	Lawful for sale in California


Minimum Compartment Size

Length x Width x Height [in]	Lamp Quantity
8.0 x 8.0 x 11.0	1


Case and Pallet Dimensions

	QTY	LENGTH	WIDTH	HEIGHT
CASE	12	16.7	12.7	10.7
PALLET	288	47.7	35.4	39.4

Wiring Diagram

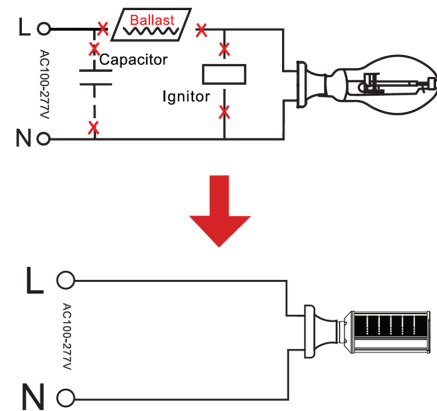

Dimension

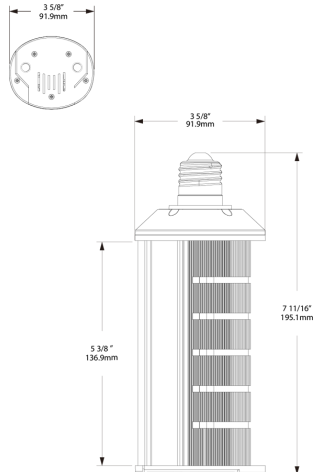

Light Distribution

