



Color: Bronze

Weight: 10.0 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	140W
120V	1.17A	Color Temp	3000K/4000K/5000K
208V	0.75A	Color	83-85 CRI
240V	0.65A	Accuracy	
277V	0.54A	L70 Lifespan	100,000 Hours
Input Watts	70-140.3W	Lumens	8947-19158 lm
		Efficacy	127.8-141.5 lm/W

Technical Specifications

Field Adjustability
3-Way Field Adjustable:
Field Adjustable Light Output:
70W/100W/140W (factory default 140W)
Color temperature (selectable by 3000K, 4000K and 5000K)

Compliance
UL Listed:
Suitable for wet locations

IESNA LM-79 & LM-80 Testing:
RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

IP Rating:
Ingress protection rating of IP65 for dust and water

DLC Listed:
This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.
DLC Product Code: P596G73J

Electrical
Driver:
Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 1.17A, 208V: 0.75A, 240V: 0.65A, 277V: 0.54A

Dimming Driver:
Driver includes wiring for 0-10V dimming systems.
Dim as low as 10%.

THD:
3.85% at 120V, 9.13% at 277V

Power Factor:
99.9% at 120V, 93.2% at 277V

Photocell:
120-277V selectable photocell that can be turned on and off.

Surge Protection:
CM: 6kV
DM: 4kV

LED Characteristics
LEDs:
Long-life, high-efficacy, surface-mount LEDs

Color Uniformity:
RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Construction
Cold Weather Starting:
The minimum starting temperature is -40°C (-40°F)

Ambient Temperature :
Max Power Temp Rating: 40°C (104°F)
Middle Power Temp Rating: 48°C (118°F)
Low Power Temp Rating: 55°C (131°F)

Housing:
Precision die-cast aluminum

Mounting:
Trunnion mount with stainless steel hardware

Lens:
Tempered glass

Reflector:
Polycarbonate

Tilt Increment:
Rotates in 30 degree increments

Effective Projected Area:
EPA = 1.35

Finish:
Formulated for high durability and long-lasting color

Technical Specifications (continued)

Green Technology:

Mercury and UV free. RoHS-compliant components.

Optical

NEMA Type:

NEMA Beam Spread of 7H x 7V

Other

Shorting Cap:

Shorting Cap for Twistlock Receptacle

5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Note:

All values are typical (tolerance +/- 10%)

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

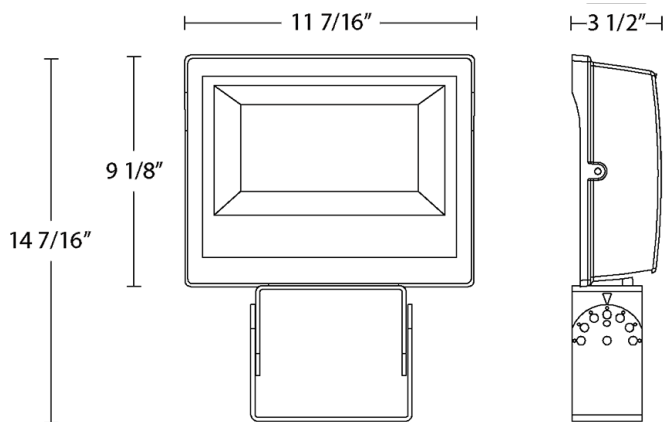

Features

- 3-Way field adjustability
- 0-10V Dimming, standard
- 100,000-hour LED lifespan
- Selectable photocell (on/off) included
- 5-Year, limited warranty

Ordering Matrix

Family	Wattage	Field Adjustability	Color Temp	Mounting	Finish	Voltage	Options
X17	XFU	140		T			
	35 = 35/25/15W 60 = 60/50/30W 80 = 80/60/40W 15 = 15W 35 = 35W 60 = 60W 80 = 80W 105 = 105W 140 = 140W 105 = 105/75/50W 140 = 140/100/70W 205 = 205/150/100W 330 = 330/250/170W	XFU = 3-Way Field Adjustable	Blank = 3000K/4000K/5000K Selectable	Blank = Knuckle SF = Slipfitter T = Trunnion	Blank = Bronze W = White	Blank = 120-277V /480 = 480V	Blank = Selectable photocell