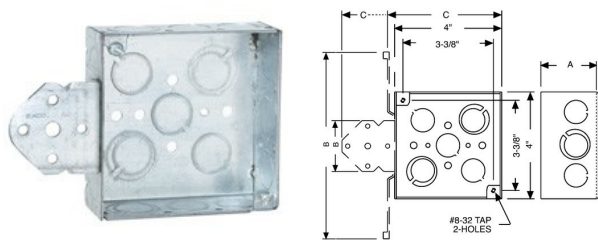


**4 IN SQUARE WELDED BRACKETED BOXES - 1-1/2 IN. DEEP WITH CONDUIT KO'S****4 in. Square Bracketed Boxes, 1-1/2 in. Deep - Welded with Conduit KO's
600V, B, Flush****A11**

Catalog #: 193

APPLICATIONS

RACO® Boxes are installed in walls or ceilings for lighting fixtures, switches or receptacles

Square boxes are used where multiple conductor runs are split into two or more directions to bring power to a number of electrical devices

PRODUCT FEATURES

Reference the Box Selection section in the front of this catalog for complete description of bracket types and features

TKO® Knockouts allow for design and installation flexibility

UL LISTED

File E195978

COMPLIANCESAll RACO® single gang, two gang, 4 in. square, and single gang gangable UL listed steel boxes are acceptable for use in 2-hour fire rated walls. For additional information, consult UL "Fire Resistance Directory" or the UL website at www.ul.com

600V Per UL 514-A, suitable for use without a bonding jumper in circuits up to 600 volts

MSDS

www.hubbell-rtb.com/certifications/Hubbell-RACO_MSDS_for_Steel_Boxes_and_Covers.pdf**FIRE RESISTANCE**

Acceptable for use in 2-hour rated walls

GENERAL PRODUCT INFORMATION

Wiring System: Conduit

CONFIGURATION

Bracket Type:	B, for Wood Studs
Bracket Setback:	Flush
Drawn or Welded:	Welded
Raised Ground:	No
Side Knockout(s):	(6) 1/2 in. & (3) TKO®
Bottom Knockouts(s):	(3) 1/2 in. & (2) TKO®

DRAWING DIMENSIONS

Dimension A:	1-1/2 in.
Dimension B:	1-31/32 in.
Dimension C:	6 in.

PRODUCT MEASUREMENTS

Depth:	1-1/2 in.
Cubic Inches (cm3):	21.0 (344.1)
Wt. Ea. (Lbs.):	0.788
Product Length (in.):	1.56
Product Width (in.):	4.00
Product Height (in.):	6.00

PACKAGING

Minimum Pack Qty.:	25
Std. Pkg.:	25
Product UPC-A Labeled:	No
Weight (Lbs. Per/C):	78.80
Ship Carton Length (in.):	11.13
Ship Carton Width (in.):	8.75
Ship Carton Height (in.):	10.63
Ctn Weight (Lbs.):	19.70
Pallet Qty:	2000
UPC Number:	050169901939
I2of5:	50050169001931