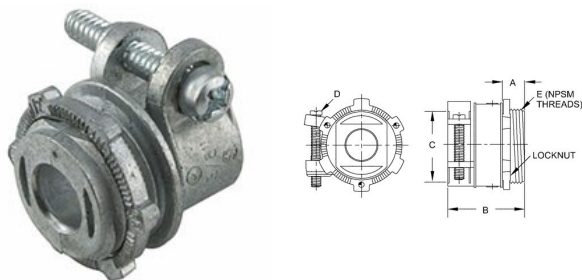


**FLEXIBLE METAL SQUEEZE CONNECTORS - DIE CAST ZINC****Straight Squeeze Connectors, Uninsulated Die Cast Zinc****B64**

Catalog #: 2193

APPLICATIONS

For use in dry locations to bond armored cable to a box or enclosure
N/A

PRODUCT FEATURES

Rugged metallic construction insures mechanical protection for the raceway

UL LISTED

Standard 514B, File E195969

CSA

C22.2 No. 18

GENERAL PRODUCT INFORMATION

Trade Size: 3/4 in.

DRAWING DIMENSIONS

Dimension A: 1/2 in.
Dimension B: 1-19/32 in.
Dimension C: 1-3/16 in.
Dimension D: NO. 12x1.00
Dimension E: 3/4 in. - 14 NPSM

PACKAGING

Package Type: Carton
Std. Pkg.: 25
Ship Carton Qty.: 250
Product UPC-A Labeled: No
Weight (Lbs. Per/C): 12.40
Ship Carton Length (in.): 18.89
Ship Carton Width (in.): 10.59
Ship Carton Height (in.): 6.81
Ctn Weight (Lbs.): 31.00
UPC Number: 050169021934
I2of5: 50050169021939