



Roxtec CF 8/ CF 32 frames

The Roxtec CF 8 and CF 32 entry seals are made from cast aluminum. The compression unit is integrated in the frame. The product is supplied as ready-made kits which include all necessary components.

■ Attachment by bolting



CF 8/CF 32 kits, integrated compression unit, aluminum




RATINGS IP: 66/67 UL/NEMA: 4, 4X, 12, 13

Kit	Diameter range and number of cables/pipes				External dimensions HxW		Weight		Art. No
	0+3.5-10.5 mm 0+0.138-0.413" (CM 15W40)	0+3.5-16.5 mm 0+0.138-0.650" (CM 20w40)	0+10.0-25.0 mm 0+0.394-0.984" (CM 30w40)	0+9.5-32.5 mm 0+0.374-1.280" (CM 40 10-32)	(mm)	(in)	(kg)	(lb)	
CF 8/5		4		1	140 x 75	5.512 x 2.952	0.7	1.543	CKT8000000005
CF 8/8		8			140 x 75	5.512 x 2.952	0.7	1.543	CKT8000000008
CF 8/9	6	2	1		140 x 75	5.512 x 2.952	0.7	1.543	CKT0000000009
CF 32/20		16		4	230 x 130	9.055 x 5.118	2.0	4.409	CKT3200000020
CF 32/32		32			230 x 130	9.055 x 5.118	2.0	4.409	CKT3200000032
CF 32/41	24	16		1	230 x 130	9.055 x 5.118	2.0	4.409	CKT3200000041


Modules and frames can be ordered separately.

CF 8/CF 32 frames, technical information

CF 8

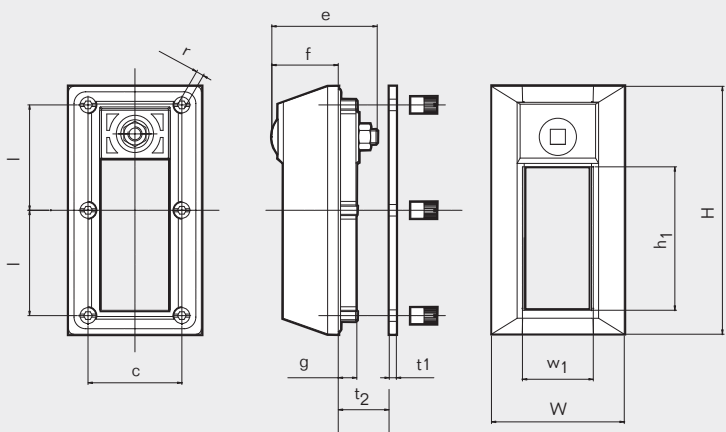

CF 32

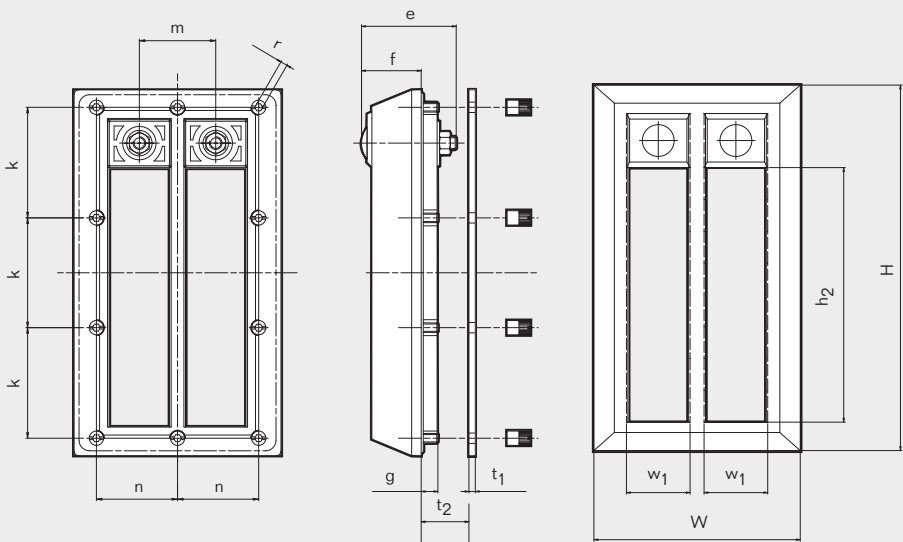

Pos	(mm)	(in)
c	53	2.087
e	59	2.323
f	38	1.496
g	12	0.472
l	60	2.362

Pos	(mm)	(in)
k	70	2.756
m	48	1.890
n	51	2.008
r	SW 4	SW 0.157
t ₁	4	0.157

Pos	(mm)	(in)
t ₂	Wall thickness Max 4	Max 0.157
h ₁	80	3.150
h ₂	160	6.299
w ₁	40	1.575

Note: All dimensions are nominal values