


8US Busbar Systems

60 mm Busbar Systems

Busbar adapters and device holders

Overview

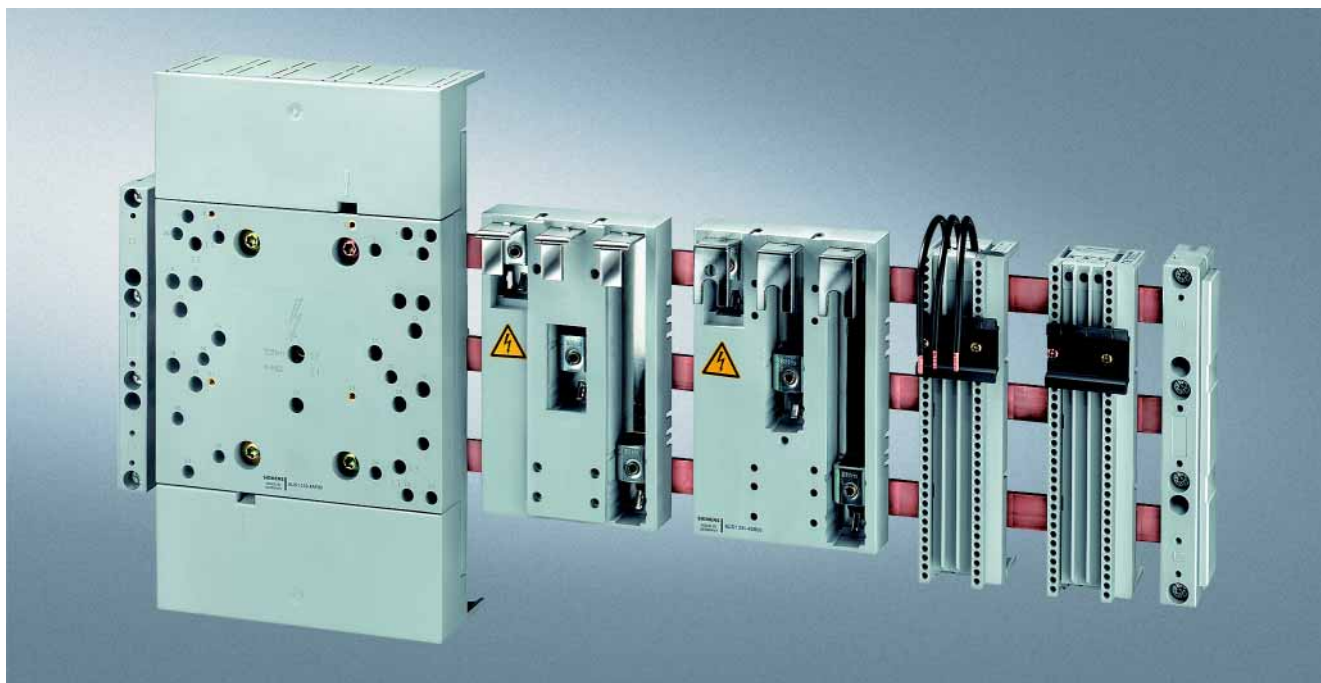

Selection and ordering data

For flat copper profiles according to DIN 46433, width: 12 mm to 30 mm, circumference: 5 mm and 10 mm, and special profiles up to 1600 A

	Busbar device adapters	Number of mounting rails (35 mm)	Rated current A	Con- nection cable AWG	Adap- ter length mm	Adap- ter width mm	Rated volt- age V	DT	Order No.	Price per PU	PU (UNIT, SET, M)	PS*	PG	Weight per PU approx. kg
	For SIRIUS													
	Size S00/S0													
	Circuit breaker	1	25	12	182	45	690	▶	8US12 51-5DM07		1	1 unit	103	0.183
	Contactor + overload relay	1	25	12	182	45	690	▶	8US12 51-5DM07		1	1 unit	103	0.183
	Direct start load feeders	1	25	12	182	45	690	▶	8US12 51-5DM07		1	1 unit	103	0.183
	Reversing feeder adapter +	1	25	12	182	45	690	▶	8US12 51-5DM07		1	1 unit	103	0.183
	Device holders +	1	--	--	182	45	--	▶	+ 8US12 50-5AM00		1	1 unit	103	0.158
	Link wedges (2 units needed for attachment)	--	--	--	--	--	--	▶	+ 8US19 98-1AA00		100	100 units	103	0.100
	Size S00 - Cage Clamp													
	Direct start load feeders	1	12.5	14	182	45	690	▶	8US12 51-5CM47		1	1 unit	103	0.190
	Size S2													
	Circuit breaker	1	56	8	182	55	690	▶	8US12 61-5FM08		1	1 unit	103	0.263
	Contactors + overload relay	1	56	8	182	55	690	▶	8US12 61-5FM08		1	1 unit	103	0.263
	Direct start load feeders	1	56	8	242	55	690	▶	8US12 61-5FP08		1	1 unit	103	0.292

Direct start load feeder