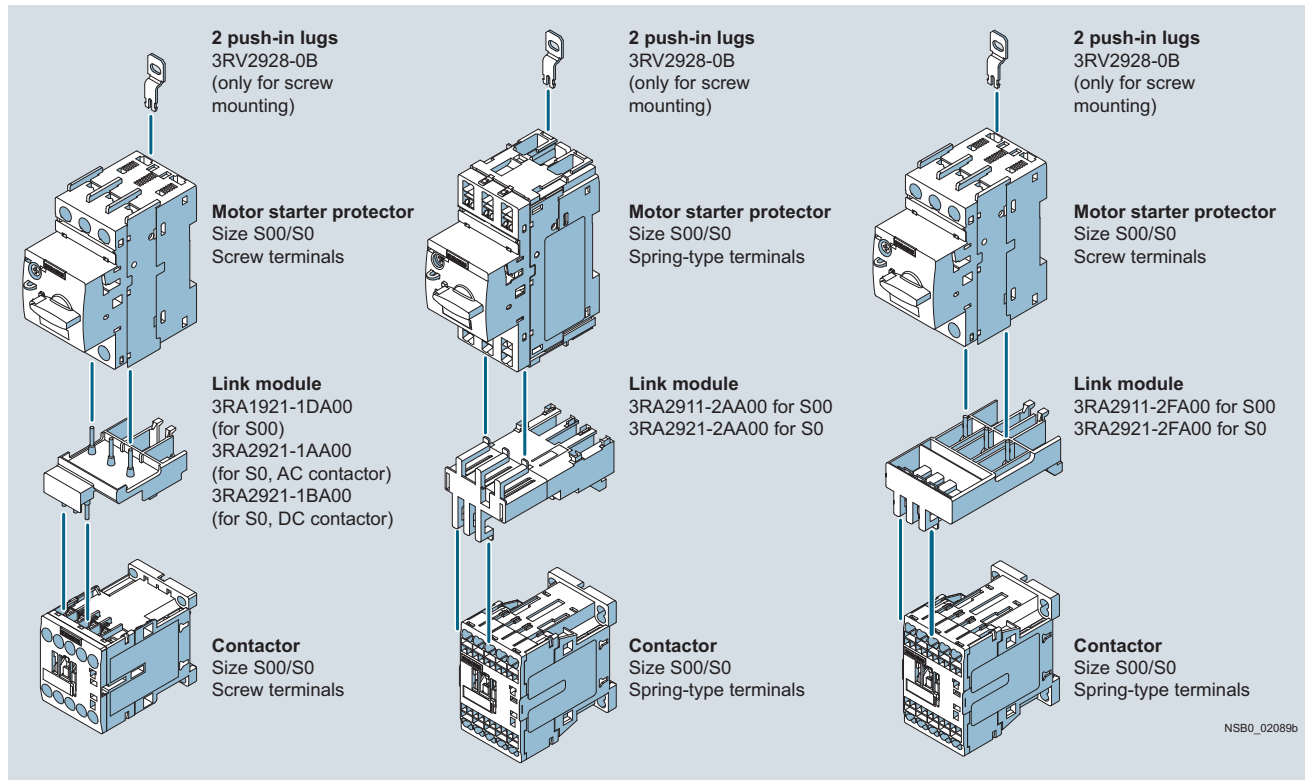


## Load Feeders and Motor Starters for Use in the Control Cabinet

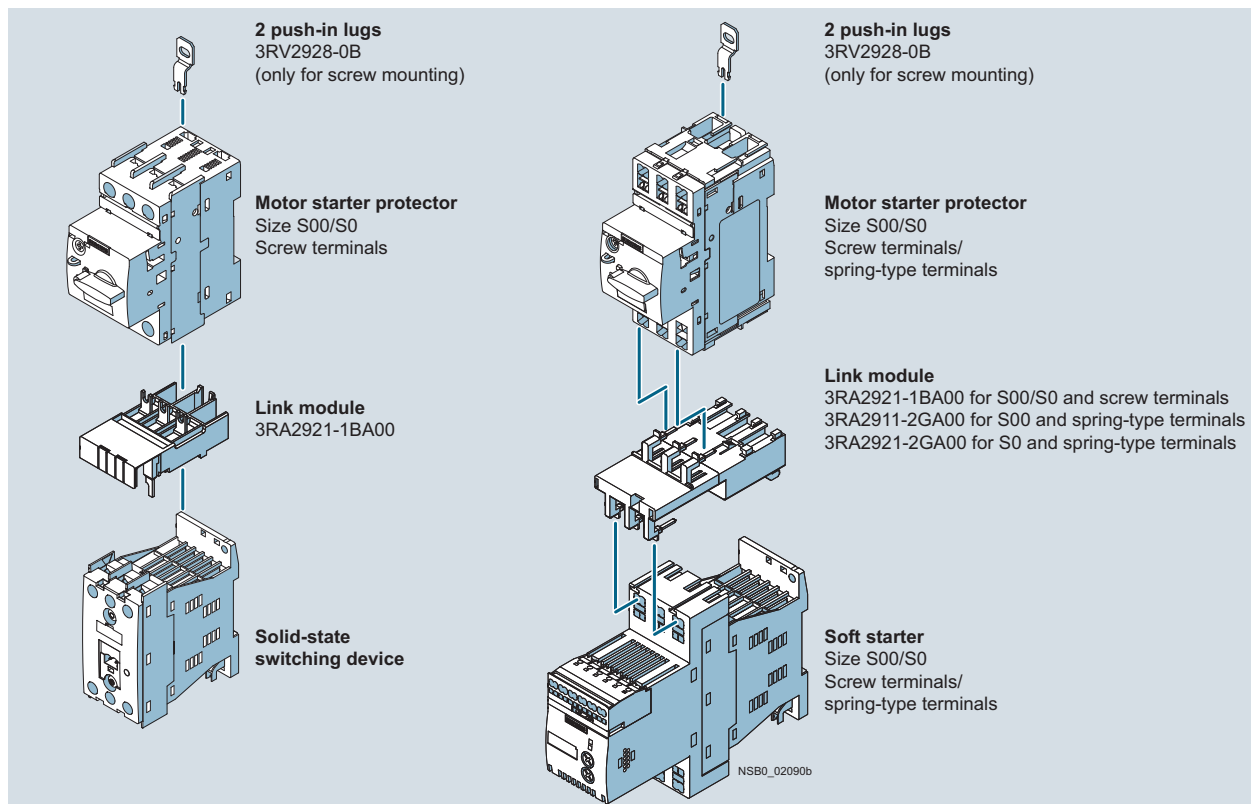
### SIRIUS 3RA2 Load Feeders

#### General data

**Direct-on-line starting • For standard rail mounting or screw fixing • Sizes S00 and S0**



Left: 3RA21 load feeder with screw terminals  
Center: 3RA21 load feeder with spring-type terminals  
Right: Motor starter protector combination with screw terminals, with contactor with spring-type terminals




Left: Motor starter protector combination with solid-state switching device with screw terminals  
Right: Motor starter protector combination with soft starter with spring-type terminals

# Load Feeders and Motor Starters for Use in the Control Cabinet
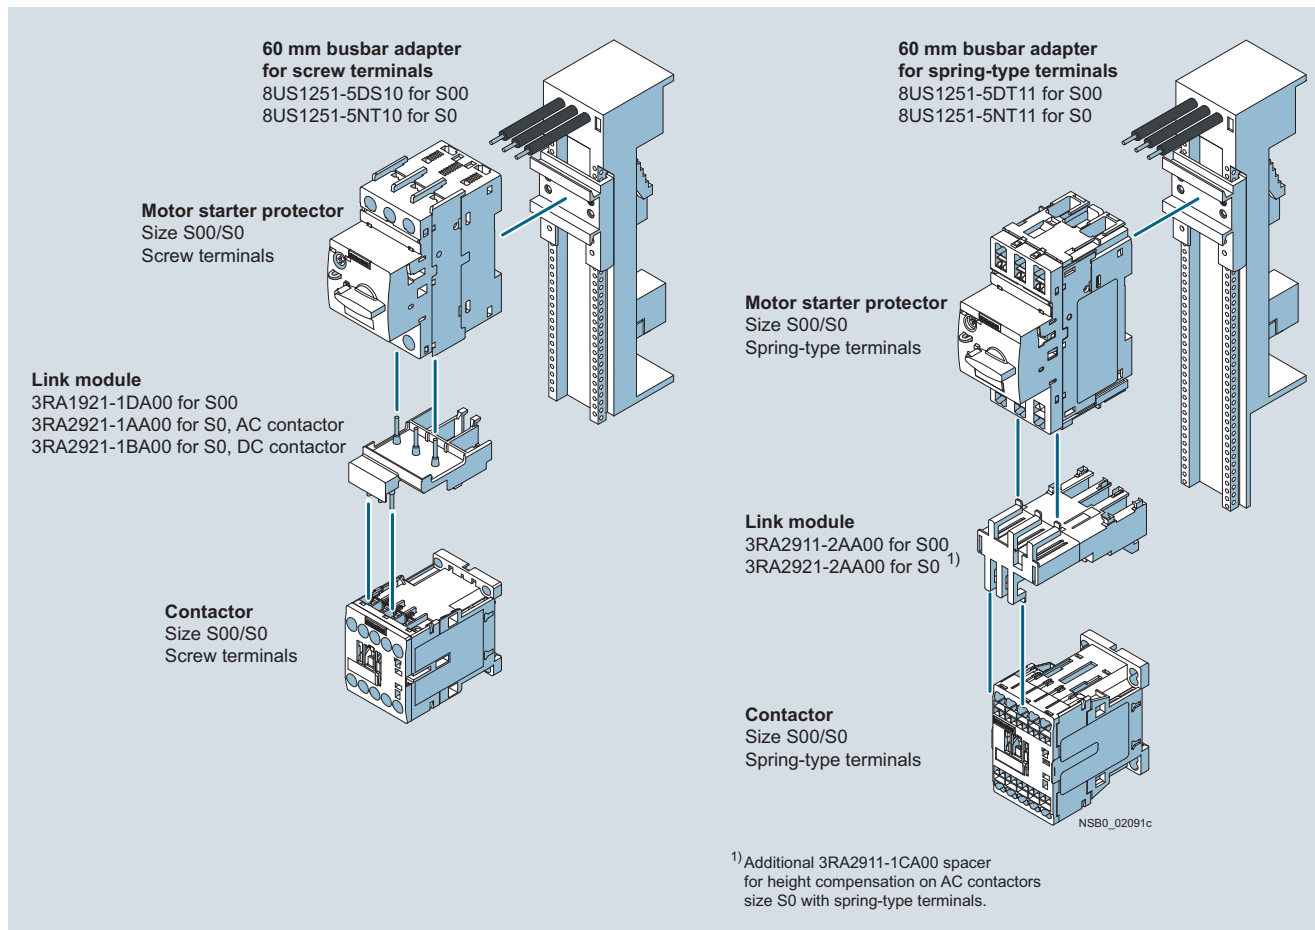
## SIRIUS 3RA2 Load Feeders

General data

### Direct-on-line starting • For 60 mm busbar systems • Sizes S00 and S0








Left: 3RA21 load feeder for direct-on-line starting with busbar adapter with screw terminals  
Right: 3RA21 load feeder for direct-on-line starting with busbar adapter with spring-type terminals

# Load Feeders and Motor Starters for Use in the Control Cabinet

## SIRIUS 3RA2 Load Feeders

### Accessories

#### Accessories for the customer assembly of fuseless load feeders

|                                                                                                      | For motor starter protectors<br>Size                                         | For contactors<br>Size | Actuating voltage of contactor | DT | Article No.                  | Price per PU | PU (UNIT, SET, M) | PS*      | PG  |
|------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|------------------------|--------------------------------|----|------------------------------|--------------|-------------------|----------|-----|
| <b>Link modules for motor starter protector to contactor<sup>2)</sup></b>                            |                                                                              |                        |                                |    |                              |              |                   |          |     |
| <br>3RA2921-1AA00   | Electrical and mechanical link between motor starter protector and contactor |                        |                                |    | <b>Screw terminals</b>       |              |                   |          |     |
|                                                                                                      | <b>Single-unit packaging</b>                                                 |                        |                                |    |                              |              |                   |          |     |
|                                                                                                      | S00/S0                                                                       | S00                    | AC and DC                      | ▶  | <b>3RA1921-1DA00</b>         |              | 1                 | 1 units  | 41B |
|                                                                                                      | S00/S0                                                                       | S0                     | AC                             | A  | <b>3RA2921-1AA00</b>         |              | 1                 | 1 units  | 41B |
|                                                                                                      | S00/S0                                                                       | S0                     | DC                             | A  | <b>3RA2921-1BA00</b>         |              | 1                 | 1 units  | 41B |
|                                                                                                      | <b>Multi-unit packaging</b>                                                  |                        |                                |    |                              |              |                   |          |     |
| <br>3RA2921-1BA00   | S00/S0                                                                       | S00                    | AC and DC                      | ▶  | <b>3RA1921-1D</b>            |              | 1                 | 10 units | 41B |
|                                                                                                      | S00/S0                                                                       | S0                     | AC                             | A  | <b>3RA2921-1A</b>            |              | 1                 | 10 units | 41B |
|                                                                                                      | S00/S0                                                                       | S0                     | DC                             | A  | <b>3RA2921-1B</b>            |              | 1                 | 10 units | 41B |
|                                                                                                      |                                                                              |                        |                                |    |                              |              |                   |          |     |
| <br>3RA2911-2AA00   | Electrical and mechanical link between motor starter protector and contactor |                        |                                |    | <b>Spring-type terminals</b> |              |                   |          |     |
|                                                                                                      | <b>Single-unit packaging</b>                                                 |                        |                                |    |                              |              |                   |          |     |
|                                                                                                      | S00                                                                          | S00                    | AC and DC                      | ▶  | <b>3RA2911-2AA00</b>         |              | 1                 | 1 units  | 41B |
|                                                                                                      | S0                                                                           | S0                     | AC <sup>1)</sup> and DC        | ▶  | <b>3RA2921-2AA00</b>         |              | 1                 | 1 units  | 41B |
|                                                                                                      | <b>Multi-unit packaging</b>                                                  |                        |                                |    |                              |              |                   |          |     |
|                                                                                                      | S00                                                                          | S00                    | AC and DC                      | ▶  | <b>3RA2911-2A</b>            |              | 1                 | 10 units | 41B |
| <br>3RA2921-2FA00 | S0                                                                           | S0                     | AC <sup>1)</sup> and DC        | ▶  | <b>3RA2921-2FA00</b>         |              | 1                 | 1 units  | 41B |
|                                                                                                      |                                                                              |                        |                                |    |                              |              |                   |          |     |
|                                                                                                      | <b>Multi-unit packaging</b>                                                  |                        |                                |    |                              |              |                   |          |     |
|                                                                                                      | S00                                                                          | S00                    | AC and DC                      | ▶  | <b>3RA2911-2F</b>            |              | 1                 | 10 units | 41B |
| <br>3RA2921-2FA00 | S0                                                                           | S0                     | AC <sup>1)</sup> and DC        | ▶  | <b>3RA2921-2F</b>            |              | 1                 | 10 units | 41B |
|                                                                                                      |                                                                              |                        |                                |    |                              |              |                   |          |     |

#### Note:

Link modules and hybrid link modules up to max. 32 A can be used.

<sup>1)</sup> A spacer for height compensation on AC contactors with spring-type terminals, size S0, is optionally available, [see page 8/40](#).

<sup>2)</sup> The link modules from motor starter protector to contactor and the hybrid link modules from motor starter protector to contactor cannot be used for the 3RV2.21-4PA1., 3RV2.21-4FA1., 3RV27 and 3RV28 motor starter protectors/circuit breakers.

<sup>3)</sup> The motor starter protector to contactor hybrid link modules are only suitable for constructing direct-on-line starters.