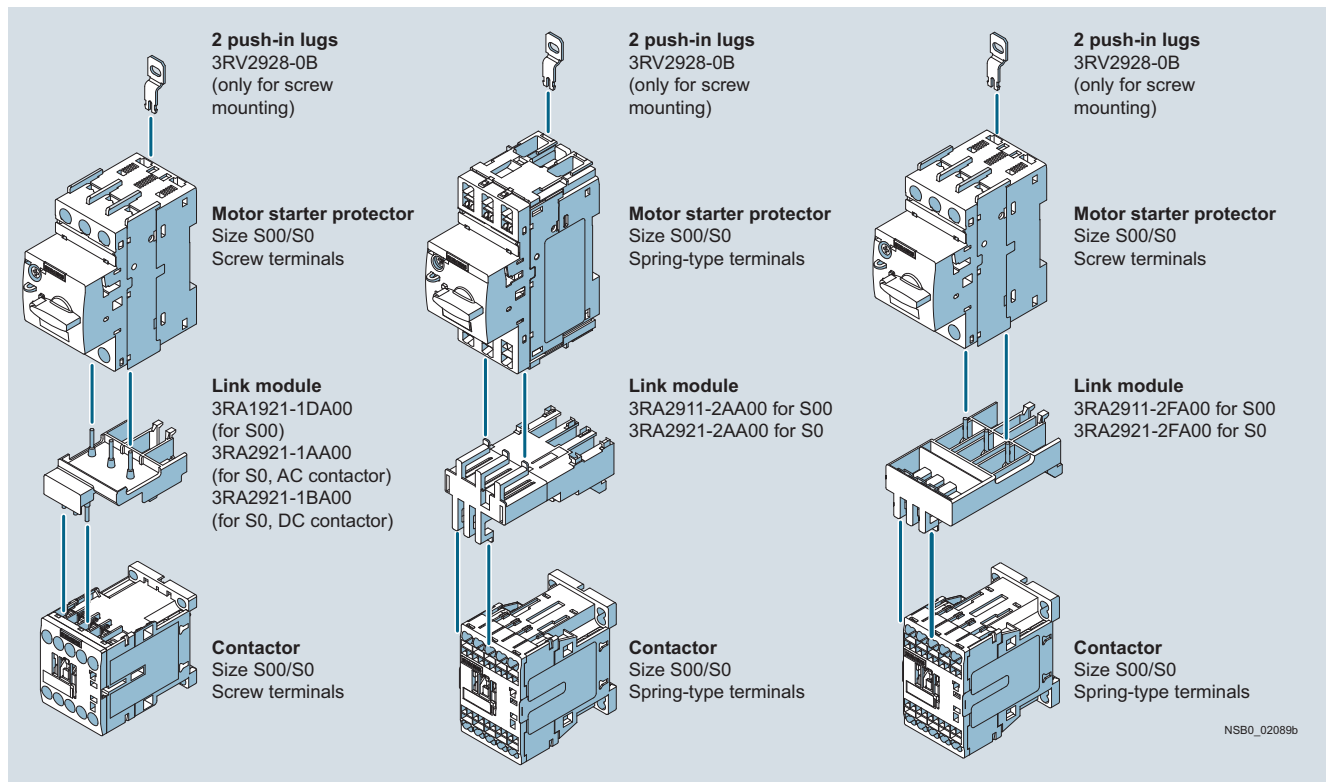


Load Feeders and Motor Starters for Use in the Control Cabinet

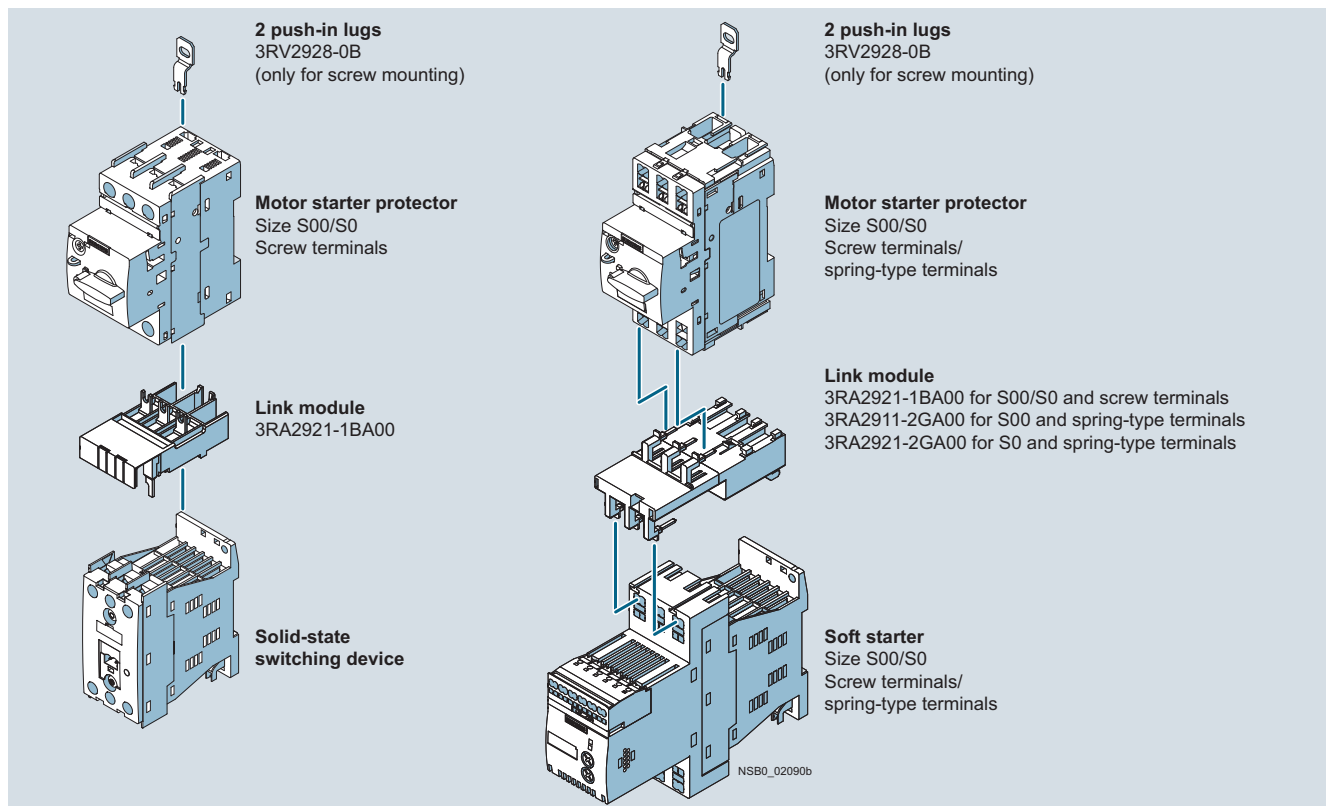
SIRIUS 3RA2 Load Feeders

General data

Direct-on-line starting • For standard rail mounting or screw fixing • Sizes S00 and S0



Left: 3RA21 load feeder with screw terminals
Center: 3RA21 load feeder with spring-type terminals
Right: Motor starter protector combination with screw terminals, with contactor with spring-type terminals



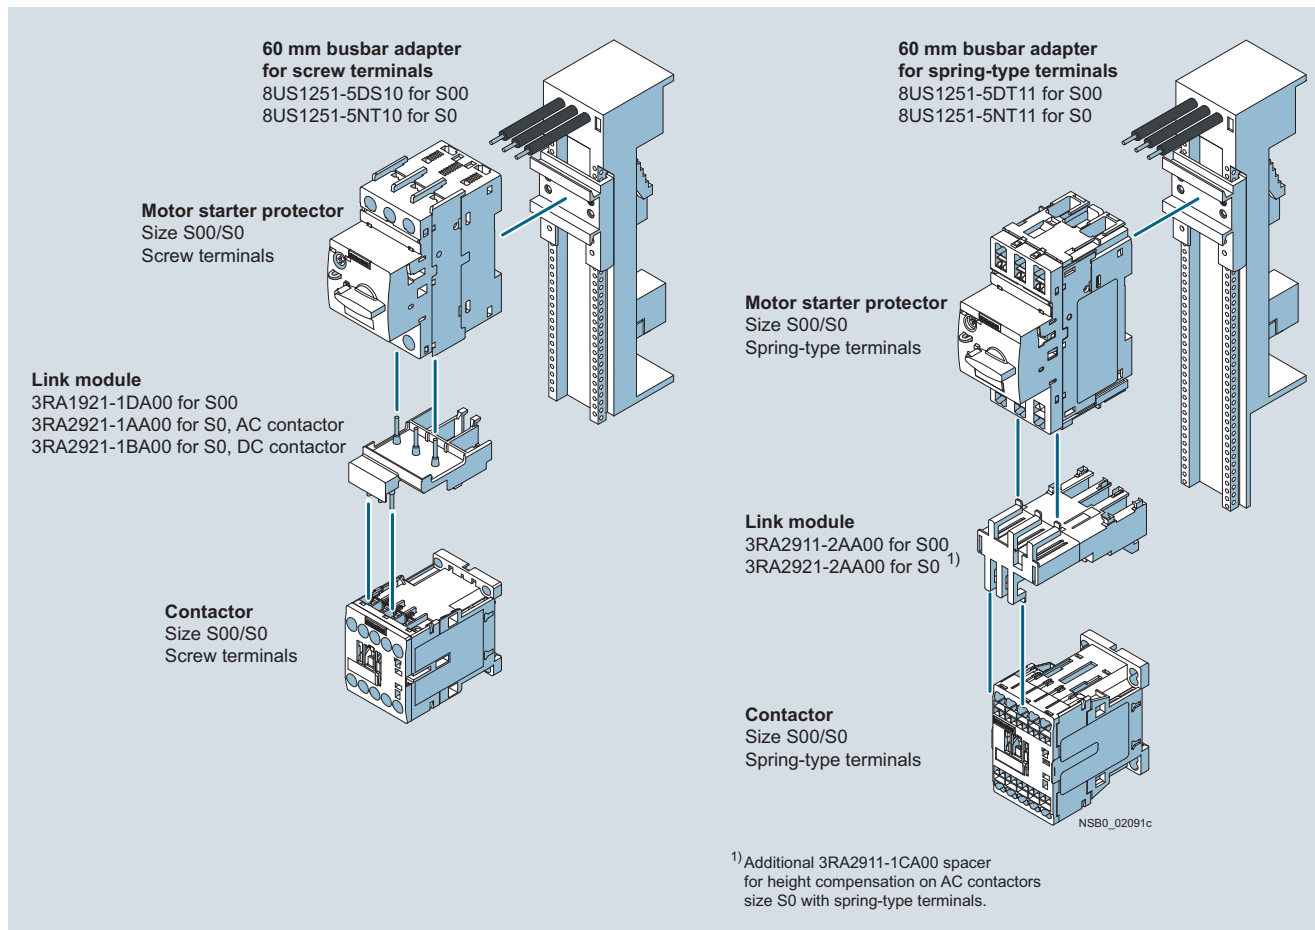
Left: Motor starter protector combination with solid-state switching device with screw terminals
Right: Motor starter protector combination with soft starter with spring-type terminals

Load Feeders and Motor Starters for Use in the Control Cabinet

SIRIUS 3RA2 Load Feeders

General data

Direct-on-line starting • For 60 mm busbar systems • Sizes S00 and S0










Left: 3RA21 load feeder for direct-on-line starting with busbar adapter with screw terminals
 Right: 3RA21 load feeder for direct-on-line starting with busbar adapter with spring-type terminals

Load Feeders and Motor Starters for Use in the Control Cabinet

SIRIUS 3RA2 Load Feeders

Accessories

Accessories for the customer assembly of fuseless load feeders

	For motor starter protectors	For contactors	Actuating voltage of contactor	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	Size	Size							
Link modules for motor starter protector to contactor²⁾									
 3RA2921-1AA00	Electrical and mechanical link between motor starter protector and contactor				Screw terminals 				
	Single-unit packaging								
	S00/S0	S00	AC and DC	► A	3RA1921-1DA00		1	1 units	41B
	S00/S0	S0	AC	► A	3RA2921-1AA00		1	1 units	41B
 3RA2921-1BA00									
	Multi-unit packaging								
	S00/S0	S00	AC and DC	► A	3RA1921-1D		1	10 units	41B
	S00/S0	S0	AC	► A	3RA2921-1A		1	10 units	41B
 3RA2921-1B00									
	Single-unit packaging								
	S00	S00	AC and DC	►	3RA2911-2AA00		1	1 units	41B
 3RA2911-2AA00									
	Multi-unit packaging								
	S00	S00	AC and DC	►	3RA2911-2A		1	10 units	41B
 3RA2911-2FA00									
	Single-unit packaging								
	S00	S00	AC and DC	►	3RA2911-2FA00		1	1 units	41B
 3RA2921-2FA00									
	Multi-unit packaging								
	S00	S00	AC and DC	►	3RA2911-2F		1	10 units	41B
 3RA2921-2FA00									
	S0	S0	AC ¹⁾ and DC	►	3RA2921-2F		1	10 units	41B

Note:

Link modules and hybrid link modules up to max. 32 A can be used.

¹⁾ A spacer for height compensation on AC contactors with spring-type terminals, size S0, is optionally available, [see page 8/40](#).



²⁾ The link modules from motor starter protector to contactor and the hybrid link modules from motor starter protector to contactor cannot be used for the 3RV2.21-4PA1., 3RV2.21-4FA1., 3RV27 and 3RV28 motor starter protectors/circuit breakers.

³⁾ The motor starter protector to contactor hybrid link modules are only suitable for constructing direct-on-line starters.

Load Feeders and Motor Starters for Use in the Control Cabinet

SIRIUS 3RA2 Load Feeders





Accessories

For motor starter protectors	For soft starters	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Size	Size						
Link modules from motor starter protector to soft starter¹⁾							
	Electrical and mechanical link between motor starter protector and soft starter		Screw terminals				
	Single-unit packaging						
	S00/S0	S00/S0	A	3RA2921-1BA00	1	1 units	41B
	Multi-unit packaging						
	S00/S0	S00/S0	A	3RA2921-1B	1	10 units	41B
	Electrical and mechanical link between motor starter protector and soft starter		Spring-type terminals				
	Single-unit packaging						
	S00	S00	▶	3RA2911-2GA00	1	1 units	41B
	S0	S0	▶	3RA2921-2GA00	1	1 units	41B
	Multi-unit packaging						
	S00	S00	▶	3RA2911-2G	1	10 units	41B
	S0	S0	▶	3RA2921-2G	1	10 units	41B

Note:

Link modules up to max. 32 A can be used.

¹⁾ The link modules for motor starter protector to soft starter cannot be used for the 3RV2.21-4PA1., 3RV2.21-4FA1., 3RV27 and 3RV28 motor starter protectors/circuit breakers.

For contactors	Version	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Size							
Wiring kits for contactors							
	Reversing duty		Screw terminals				
	Electrical and mechanical link for reversing contactors, optionally with integrated electrical and mechanical interlock						
	S00	▶	3RA2913-2AA1		1	1 units	41B
	S0	▶	3RA2923-2AA1		1	1 units	41B
	Wye-delta starting						
	Electrical and mechanical link for three contactors of same size						
	S00	▶	3RA2913-2BB1		1	1 units	41B
	S0	▶	3RA2923-2BB1		1	1 units	41B
	Reversing duty		Spring-type terminals				
	Electrical and mechanical link for reversing contactors, optionally with integrated electrical and mechanical interlock						
	S00	▶	3RA2913-2AA2		1	1 units	41B
	S0	▶	3RA2923-2AA2		1	1 units	41B
	Wye-delta starting						
	Electrical and mechanical link for three contactors of same size						
	S00	▶	3RA2913-2BB2		1	1 units	41B
	S0	▶	3RA2923-2BB2		1	1 units	41B
Safety main current connectors for 2 contactors							
	Switches 2 contactors in series		Screw terminals				
	S00	A	3RA2916-1A		1	1 units	41B
	S0	A	3RA2926-1A		1	1 units	41B