

Auxiliary switch block, 1 NC, del., EN 50005 screw terminal, for motor contactors, 1-pole



| General technical data                                                                                             |                                                                                    |
|--------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| Product brand name                                                                                                 | SIRIUS                                                                             |
| Suitability for use                                                                                                | Contactor relay and power contactor                                                |
| Protection class IP on the front                                                                                   | IP20                                                                               |
| Ambient temperature <ul style="list-style-type: none"><li>during storage</li><li>during operation</li></ul>        | <div>-55 ... +80 °C</div> <div>-25 ... +60 °C</div>                                |
| Mechanical service life (switching cycles) typical                                                                 | 10 000 000                                                                         |
| Electrical endurance (switching cycles) at AC-15 at 230 V typical                                                  | 200 000                                                                            |
| Contact reliability                                                                                                | one incorrect switching operation of 100 million switching operations (17 V, 5 mA) |
| Contact reliability of auxiliary contacts                                                                          | 1 faulty switching per 100 million (17 V, 1 mA)                                    |
| Insulation voltage with degree of pollution 3 rated value                                                          | 690 V                                                                              |
| Surge voltage resistance rated value                                                                               | 6 kV                                                                               |
| Auxiliary circuit                                                                                                  |                                                                                    |
| Number of NC contacts for auxiliary contacts <ul style="list-style-type: none"><li>instantaneous contact</li></ul> | <div>0</div>                                                                       |

|                                                         |        |
|---------------------------------------------------------|--------|
| <b>Number of NO contacts for auxiliary contacts</b>     |        |
| • instantaneous contact                                 | 0      |
| <b>Operating current of auxiliary contacts at AC-12</b> |        |
| • at 24 V                                               | 10 A   |
| • at 230 V                                              | 10 A   |
| • maximum                                               | 10 A   |
| <b>Operating current</b>                                |        |
| • of auxiliary contacts                                 |        |
| — at AC-14                                              |        |
| — at 125 V                                              | 6 A    |
| — at 250 V                                              | 6 A    |
| — at AC-15                                              |        |
| — at 24 V                                               | 6 A    |
| — at 230 V                                              | 6 A    |
| — at 400 V                                              | 3 A    |
| • at AC-15 at 690 V rated value                         | 1 A    |
| <b>Operating current</b>                                |        |
| • of auxiliary contacts at DC-12                        |        |
| — at 24 V                                               | 10 A   |
| — at 110 V                                              | 3 A    |
| — at 220 V                                              | 1 A    |
| • with 2 current paths in series at DC-12               |        |
| — at 24 V rated value                                   | 10 A   |
| — at 60 V rated value                                   | 10 A   |
| — at 110 V rated value                                  | 4 A    |
| — at 220 V rated value                                  | 2 A    |
| — at 440 V rated value                                  | 1.3 A  |
| — at 600 V rated value                                  | 0.65 A |
| • with 3 current paths in series at DC-12               |        |
| — at 24 V rated value                                   | 10 A   |
| — at 60 V rated value                                   | 10 A   |
| — at 110 V rated value                                  | 10 A   |
| — at 220 V rated value                                  | 3.6 A  |
| — at 440 V rated value                                  | 2.5 A  |
| — at 600 V rated value                                  | 1.8 A  |
| <b>Operating current</b>                                |        |
| • of auxiliary contacts at DC-13                        |        |
| — at 24 V                                               | 6 A    |
| — at 60 V                                               | 2 A    |
| — at 110 V                                              | 1 A    |
| — at 220 V                                              | 0.3 A  |

- with 2 current paths in series at DC-13
  - at 24 V rated value 10 A
  - at 60 V rated value 3.5 A
  - at 110 V rated value 1.3 A
  - at 220 V rated value 0.9 A
  - at 440 V rated value 0.2 A
  - at 600 V rated value 0.1 A
- with 3 current paths in series at DC-13
  - at 24 V rated value 10 A
  - at 60 V rated value 4.7 A
  - at 110 V rated value 3 A
  - at 220 V rated value 1.2 A
  - at 440 V rated value 0.5 A
  - at 600 V rated value 0.26 A

#### Installation/ mounting/ dimensions

|                      |                  |
|----------------------|------------------|
| <b>Mounting type</b> | snap-on mounting |
| <b>Width</b>         | 10 mm            |
| <b>Height</b>        | 38 mm            |
| <b>Depth</b>         | 51 mm            |

#### Connections/Terminals

|                                                                                                                                                                                                                                                       |                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| <b>Type of electrical connection for auxiliary and control current circuit</b>                                                                                                                                                                        | screw-type terminals                                                                                    |
| <b>Type of connectable conductor cross-sections</b>                                                                                                                                                                                                   |                                                                                                         |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts               <ul style="list-style-type: none"> <li>— finely stranded</li> <li>— with core end processing</li> </ul> </li> <li>• at AWG conductors for auxiliary contacts</li> </ul> | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14) |

#### Safety related data

|                                                                           |           |
|---------------------------------------------------------------------------|-----------|
| <b>Product function Mirror contact acc. to IEC 60947-4-1</b>              | Yes       |
| <ul style="list-style-type: none"> <li>• Note</li> </ul>                  | with 3RT1 |
| <b>Product function positively driven operation acc. to IEC 60947-5-1</b> | No        |

#### Certificates/approvals

| General Product Approval | Functional Safety/Safety of Machinery | Declaration of Conformity | Test Certificates |
|--------------------------|---------------------------------------|---------------------------|-------------------|
|--------------------------|---------------------------------------|---------------------------|-------------------|



[Type Examination Certificate](#)



[Special Test Certificate](#)

| Shipping Approval | other |
|-------------------|-------|
|-------------------|-------|



[Confirmation](#)

#### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH1921-1CD01>

**Cax online generator**



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH1921-1CD01>


**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RH1921-1CD01>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RH1921-1CD01&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RH1921-1CD01&lang=en)

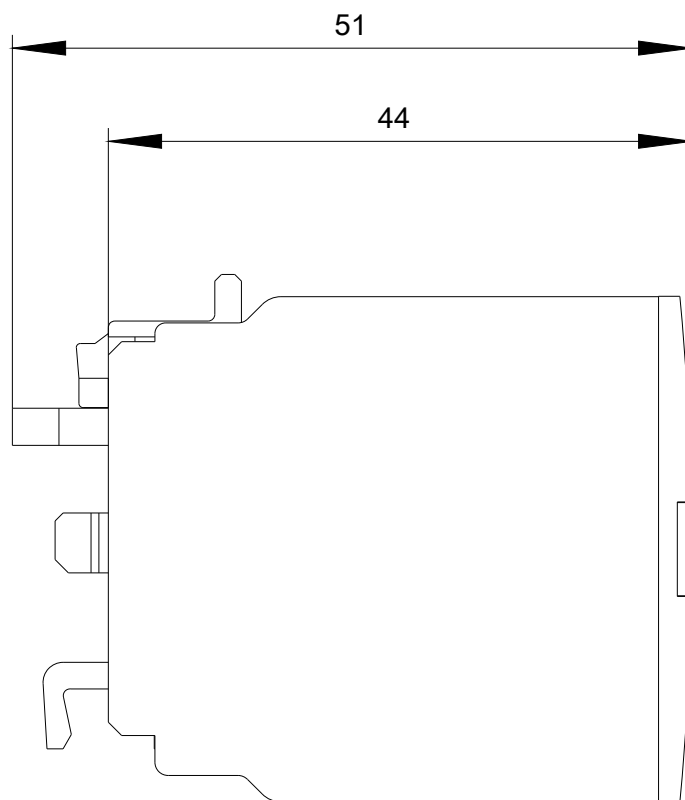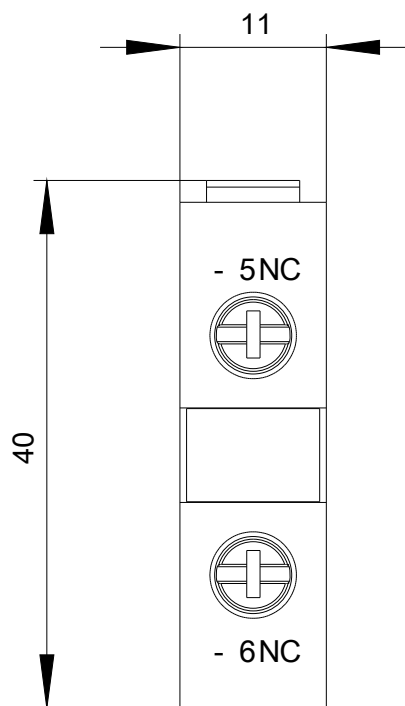

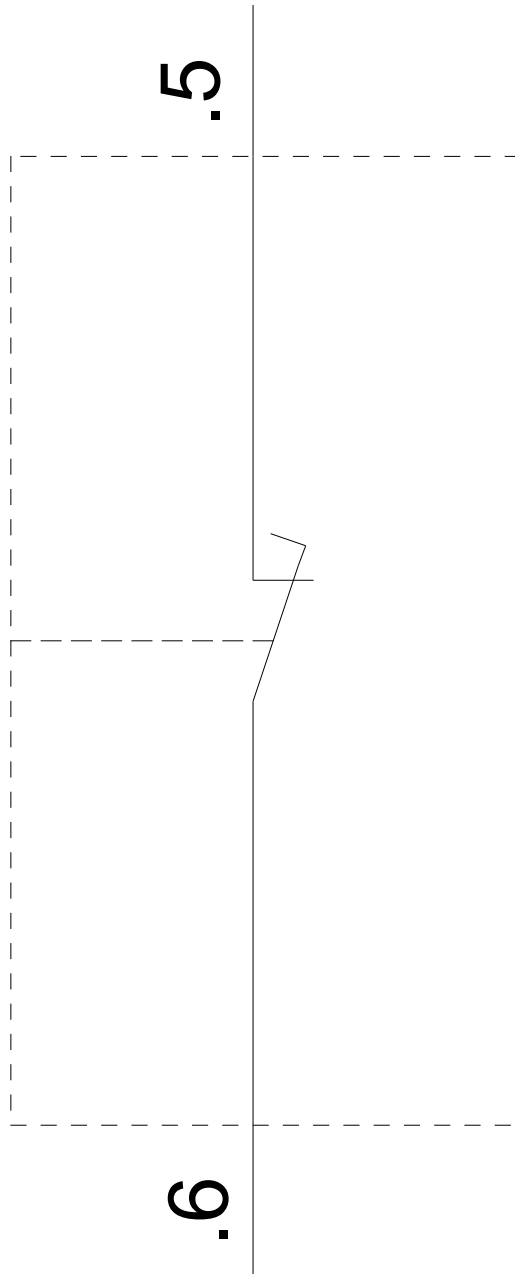

last modified:

01/20/2019