


AS-I CABLE, TRAPEZOIDAL, F. EXTERNAL
AUXILIARY VOLTAGE, UP TO 24V, BLACK, RUBBER,
2X 1.5QMM CONSISTS OF 100 M CABLE

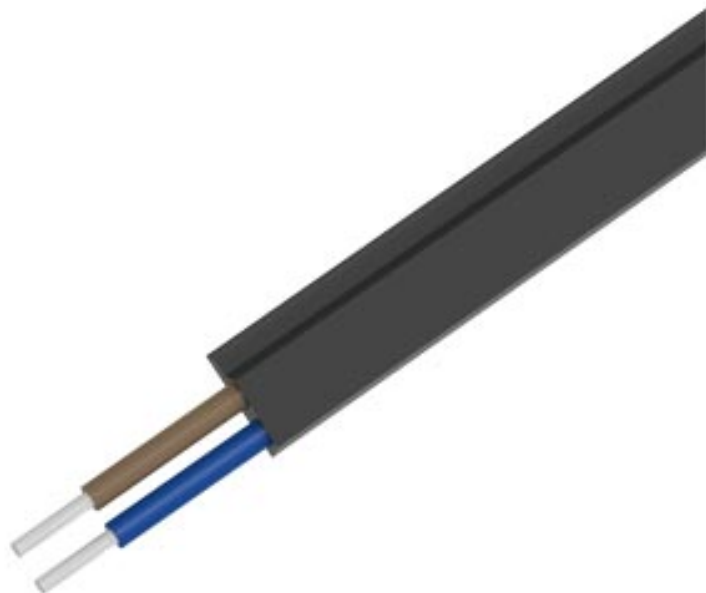

General technical data:

Design of the product		AS-Interface shaped cables
Colour		black (DC 24 V)
Material		rubber
Quantity		100 m roll

Mechanical data:

Without silicone precipitation		yes
bending radius according to DIN VDE 0298 Part 300		
• fixed min	m	12
• freely movable min	m	24
Without halogens		yes
Flexibility		very good
Bending behavior according according to DIN VDE 0472 Part 603		no break after 30000 reverse bending cycles
Core colours		brown, blue

Ambient conditions:

Fire behavior		flammable
resistance to oil		conditionally resistant

Ozone and weather resistant		conditionally resistant
Temperature range		
• stationary	°C	-40 ... +85
• moved	°C	-25 ... +85

Certificates/ approvals:

Approvals Canada	CSA		no
Approvals USA	UL		no
Monitored expertise (VDE)			no

General Product Approval	Declaration of Conformity	Shipping Approval	other
--------------------------	---------------------------	-------------------	-------



[Environmental Confirmations](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RX9020-0AA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RX9020-0AA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RX9020-0AA00&lang=en

last modified:

07/01/2017