

AUXILIARY SWITCH, 2 NO CONTACTS,
CONNECTION AUXILIARY CIRCUIT: SPRING-
LOADED TERMINAL,



General technical data:

product brandname		SIRIUS
Product designation		auxiliary switch compact feeder
Protection class IP		IP20
Relative humidity during operation	%	10 ... 90
Ambient temperature		
• during transport	°C	-55 ... +80
• during storage	°C	-55 ... +80
• during operation	°C	-20 ... +60
Equipment marking acc. to DIN EN 61346-2		K
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		K

Auxiliary circuit:

Number of NC contacts for auxiliary contacts		0
Number of NO contacts for auxiliary contacts		2

Installation/ mounting/ dimensions:

Width	mm	45
Height	mm	32

Depth	mm	25
Connections/ Terminals:		
Wire stripping length	mm	10
Type of electrical connection		spring-loaded terminals
• for auxiliary and control current circuit		
Type of connectable conductor cross-sections for auxiliary contacts		2x (0.25 ... 2.5 mm ²)
• solid		
• finely stranded		
— with core end processing		2x (0.25 ... 1.5 mm ²)
— without core end processing		2x (0.25 ... 2.5 mm ²)
Type of connectable conductor cross-sections at AWG conductors for auxiliary contacts		2x (24 ... 14)

Certificates/ approvals:

Certificate of suitability		IEC / EN 60947-6-2			
General Product Approval		EMC	Functional Safety/Safety of Machinery	Declaration of Conformity	
 CCC	 CSA	 EAC	 C-Tick	 VDE	 EG-Konf.

Shipping Approval

other



[Environmental Confirmations](#)

other

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)


<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA6911-2A>

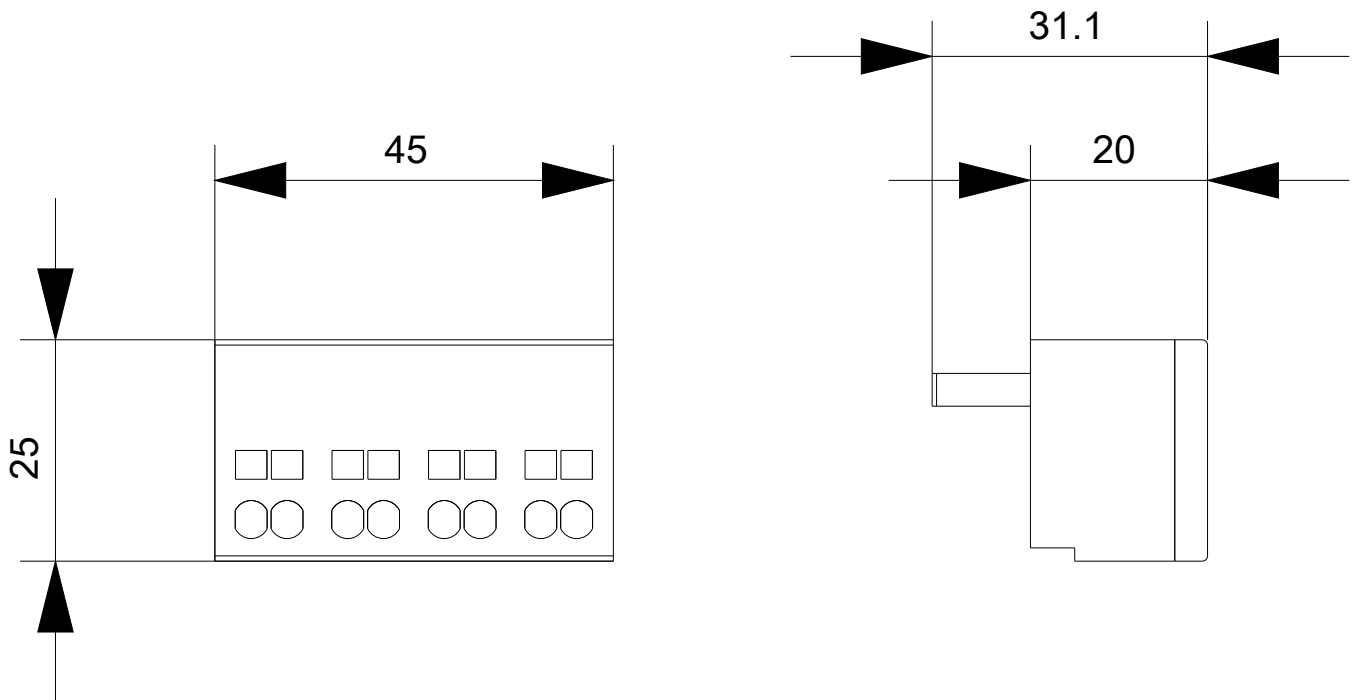

last modified:

08/04/2017